

# **USER'S GUIDE**

Installation & Operation  
Instructions

Transit Time Flow Meter

Model TTFM 6.1

Manual Series A.1.8

Note: This page has been left blank intentionally.

## INDEX

|   |    |
|---|----|
| CONNECTIONS .....   | 4  |
| KEYPAD SYSTEM.....  | 6  |
| MENU SYSTEM .....   | 7  |
| ICONS .....   | 8  |
| MESSAGE ICON .....  | 9  |
| STATUS .....  | 9  |
| PASSWORD.....   | 11 |
| MENU SELECTIONS .....   | 11 |
| UNITS/MODE.....   | 12 |
| SET UP .....  | 14 |
| CALIBRATION .....   | 17 |
| RELAY PARAMETERS .....  | 19 |
| DATA LOGGING .....  | 20 |
| COMMUNICATION (OPTIONAL) .....  | 22 |
| SPECIAL FUNCTIONS .....   | 24 |
| TYPICAL SE16B SENSOR INSTALLATION .....   | 27 |
| TYPICAL SE16A SENSOR INSTALLATION .....   | 28 |
| SENSOR MOUNTING.....  | 32 |
| 2 OR 4 CROSS INSTALLATION OVERVIEW – SE16B TMK-B1 KIT .....                         | 33 |
| 1 CROSS INSTALLATION OVERVIEW – SE16B TRANSDUCERS TMK-B1 KIT .....                  | 37 |
| 2 OR 4 CROSS INSTALLATION OVERVIEW – SE16B TRANSDUCERS TMK-B21 OR TMK-B22 KIT ..... | 44 |
| 1 CROSS INSTALLATION OVERVIEW – SE16B TRANSDUCERS TMK-B21 OR TMK-B22 KIT.....       | 48 |
| 2 OR 4 CROSS INSTALLATION OVERVIEW – SE16A TRANSDUCERS TMK-A1 KIT .....             | 55 |
| SENSOR MOUNTING/COUPLING RECOMMENDATIONS .....                                      | 58 |
| ENCLOSURE INSTALLATION .....  | 59 |
| FIELD TROUBLESHOOTING.....  | 60 |
| COMMON QUESTIONS AND ANSWERS.....   | 63 |
| APPLICATIONS HOTLINE .....  | 65 |
| PRODUCT RETURN PROCEDURE .....  | 65 |
| SPECIFICATIONS.....   | 69 |
| APPENDIX A - CONVERSION TABLE .....   | 71 |
| PIPE CHARTS.....  | 72 |
| APPENDIX C – LIQUID SPEED OF SOUND.....   | 77 |
| APPENDIX D.....   | 84 |

*IMPORTANT NOTE: This instrument is manufactured and calibrated to meet product specifications. Please read this manual carefully before installation and operation. Any unauthorized repairs or modifications may result in a suspension of the warranty. If this product is not used as specified by the manufacturer, protection may be impaired.*

Available in Adobe Acrobat pdf format

**CONNECTIONS:**

**POWER INPUT:** The standard model requires AC power input between 100 to 240 VAC 50/60Hz 10VA. No adjustments are necessary for voltages within this range. Connect L (Live) N (Neutral) and AC Ground.

Optional DC input model requires 9-32 VDC/10 Watts. Connect to + and - terminals.

Optional Thermostat and Heater modules are available rated for specifically 115 VAC or specifically 230 VAC.

**IMPORTANT NOTE:** To comply with electrical safety standards, AC power input and relay connection wires must have conduit entry to the instrument enclosure. Installation requires a switch, overcurrent fuse or circuit breaker in the building (in close proximity to the equipment) that is marked as the disconnect switch.




Risk of electric shock. Loosen cover screw to access connections. Only qualified personnel should access connections.

Note: Use of instrumentation over 40°C ambient requires special field wiring.

Note: Some models feature a user replaceable fuse. Fuse is 2 Amp 250V (T2AL250V), located on the power supply.


**100-240 VAC Meter CONNECTIONS**

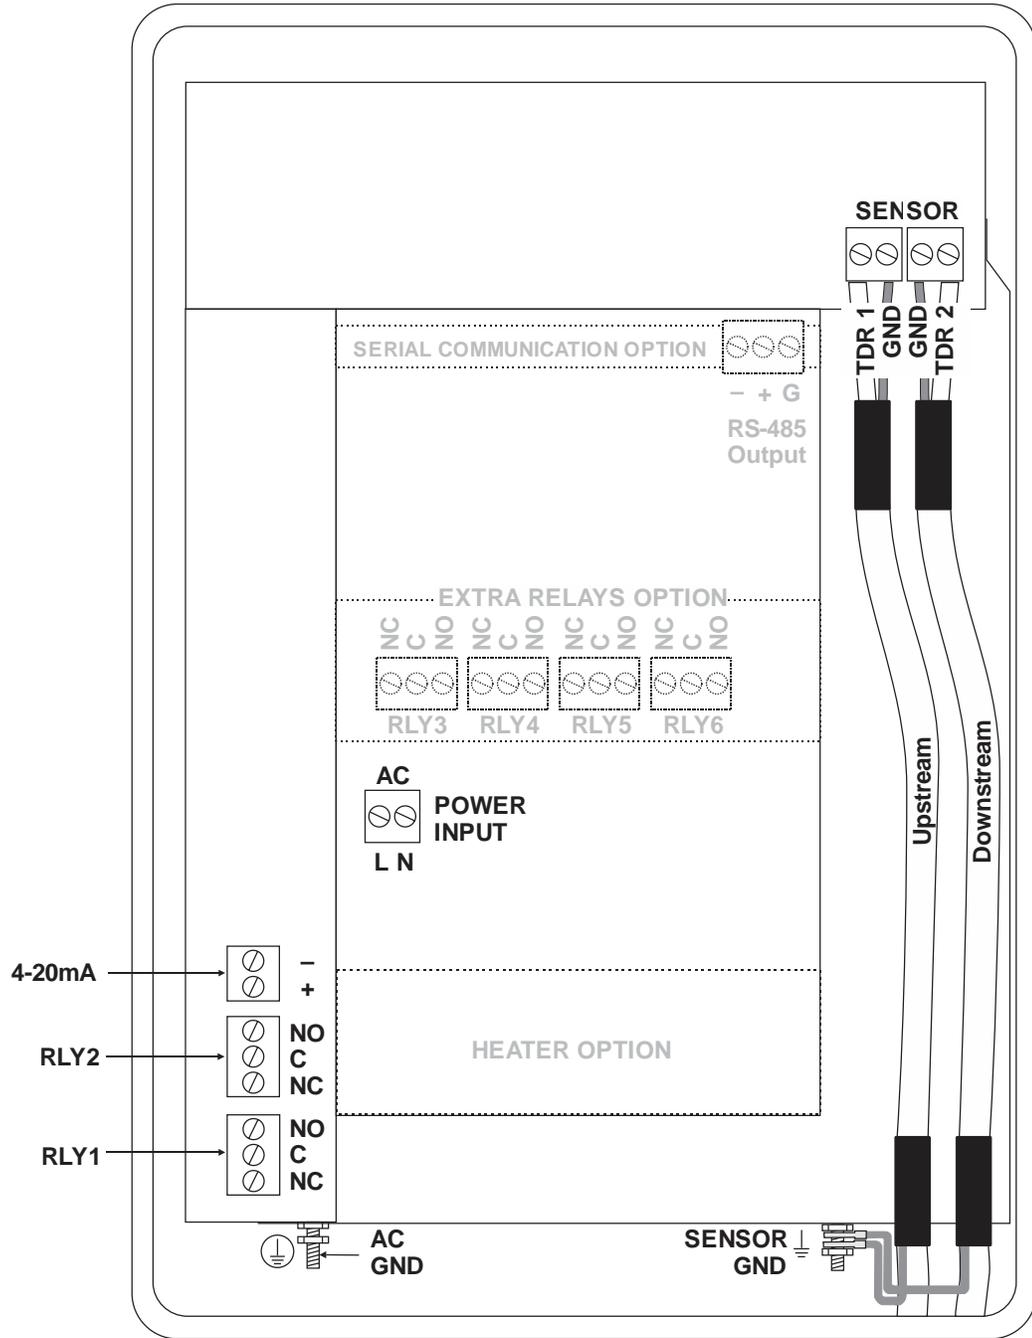


## KEYPAD SYSTEM

The diagram on page 7 shows the TTFM 6.1 menu system. Arrows show the four directions to leave a menu box. Pressing a corresponding keypad arrow will move to the next item in the direction shown. Move the cursor (highlighted) under numerals and increase or decrease numerals with the **↑** and **↓** keys.

To store calibration values permanently (even through power interruptions), press the **✓** button.

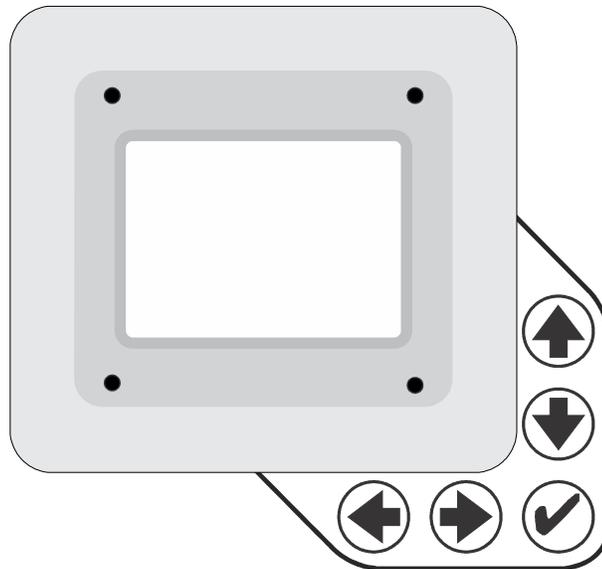

### MENU SYSTEM

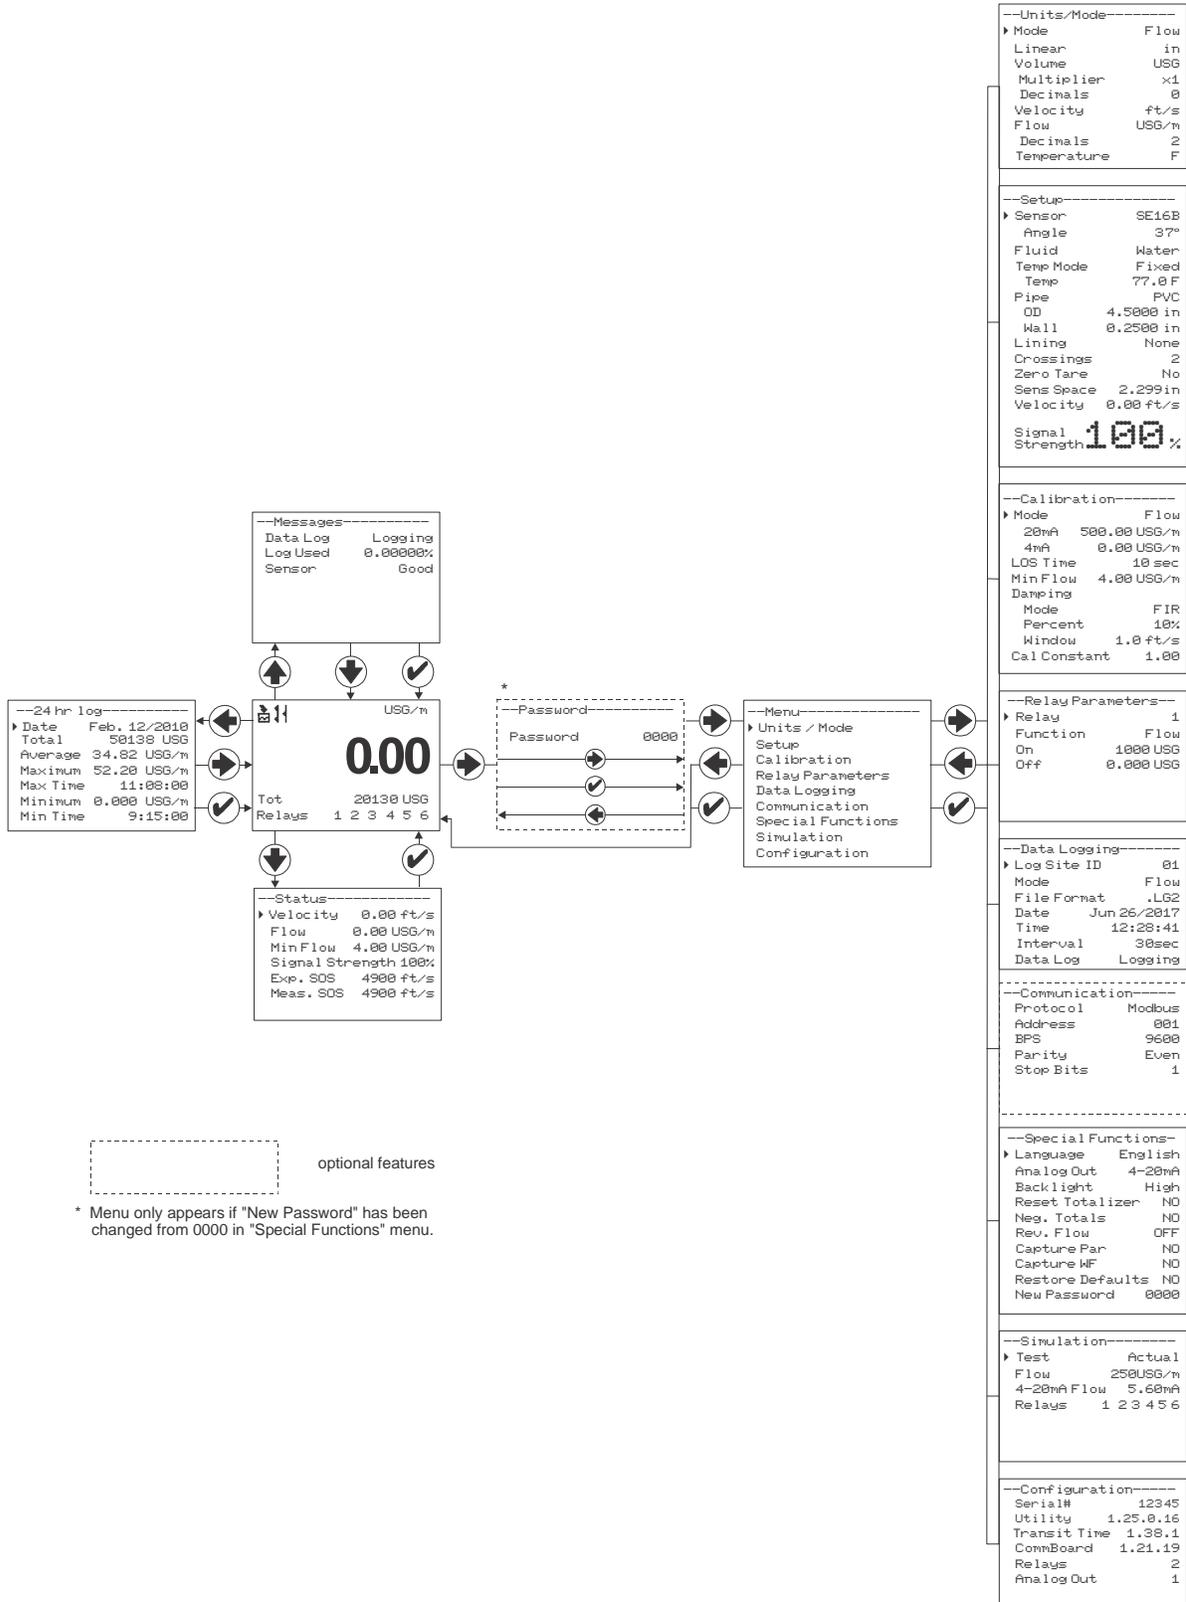

optional features

\* Menu only appears if "New Password" has been changed from 0000 in "Special Functions" menu.

**ICONS**



1.



2.

Message waiting. Press  from main page to view.



Data logging off.



1.



2.

Data logging on.



1.



2.



3.



4.

USB file downloading.



File download completed.



Download Error.



1.



2.



3.

TTFM Echo OK.



TTFM - Low Signal / No Echo, Empty Pipe or high Aeration.




TTFM - No Sensors Attached / Wrong Settings




### MAIN DISPLAY

The Main Display shows the units selected from the Units/Mode menu, flow rate or velocity rate being measured, totalizer, totalizer multiplier, and relay states. The TTFM 6.1 will go to this display after start-up.



### MESSAGE ICON

Press **↑** from the Main Display to view status of the data logger and error/warning messages provided by the instrument. The Message Icon will appear on the Main Display if error messages are being generated by the instrument. Press **✓** to return to the Main Display.



### STATUS

Press **↓** from the Main Display to view Status of the measurement. Press **✓** to return to the Main Display.

- Velocity**                      Displays flow velocity in ft/s or m/s, selected in the Units/Mode menu.
  
- Flow**                              Displays flow rate in units selected in the Units/Mode menu. A list of flow rate units is provided in the Units/Mode section of the manual.
  
- Min Flow**                        Displays a read-only value for the minimum flow cutoff, in units which match the Flow selection. Measured flow rates below the Min Flow will result in the displayed flow rate on the LCD display to be 0.0. This parameter is used to suppress electrical noise at zero flow conditions, and it is typically set to the flow rate equivalent of 0.1 ft/sec in the programmed pipe size. The Min Flow can be adjusted in the Calibration menu.
  
- Signal Strength**                Displays magnitude of signal being received by the ultrasonic sensors. 100% is the ideal signal strength. Signal strengths less than 100% could indicate poor pipe conditions (corrosion), highly aerated water, or programmed setup parameters which don't closely match field conditions. Consideration should be made to use 1-cross installation method in such cases, if not already using it.

**Status (cont.)**

```

--Status-----
▶ Velocity  0.00 ft/s
  Flow     0.00 USG/m
  Min Flow 4.00 USG/m
  Signal Strength 100%
  Exp. SOS 4900 ft/s
  Meas. SOS 4900 ft/s
  
```

**Exp. SOS**

Displays the expected fluid speed of sound measurement, in units that match the Velocity. The expected speed of sound is based on the pipe, fluid, and temperature selection in the Setup menu.

**Meas. SOS**

Displays the measured fluid speed of sound, in units that match Exp. SOS. The meter calculates this value based on the time it takes for the signal to arrive from one transducer to another. Large differences between expected and measured speed of sound (> 10%) typically indicate an error in the setup of the instrument. Verify the following are correct in the Setup menu and with the physical installation of the transducers:

- Pipe Material
- Pipe OD
- Pipe Wall Thickness
- Liner Type
- Liner Thickness
- Fluid Type
- Fluid Temperature
- Crossings
- Separation Distance

```

--24 hr log-----
▶Date      Feb. 12/2010
Total      50138 USG
Average    34.82 USG/m
Maximum    52.20 USG/m
Max Time   11:08:00
Minimum    0.000 USG/m
Min Time   9:15:00
  
```

### 24 HR LOG

Press **←** from the Main Display to view a formatted flow report. Press **↓** to scroll down one day or repeatedly to scroll to a specific date. Up to 365 days will be stored. Newest date will overwrite the oldest. Press **✓** to return to the Main Display.

**IMPORTANT:** Inserting a USB drive into the meter while on this screen will transfer 24 HR Log data to the USB drive in .csv format.

```

--Password-----
Password      0000
  
```

### PASSWORD

The Password (a number from 0000 to 9999) prevents unauthorized access to the Calibration menu.

From the Main Display press the **➡** key to get to `Password`. Factory default password is 0000 and if it has not been changed, this screen will be bypassed completely.

A new password can be stored by going to the `Special Functions New Password` menu.

If a user password is required, press **➡** to place the cursor under the first digit and **↓** or **↑** to set the number, then **➡** to the second digit, etc. Press **➡** or **✓** to proceed to the Menu Selections screen.

```

--Menu-----
▶Units / Mode
Setup
Calibration
Relay Parameters
Data Logging
Communication
Special Functions
Simulation
Configuration
  
```

### MENU SELECTIONS

The Menu selections page is used to navigate to specific menus which are described in more detail on the following pages.

Press **↑** or **↓** to navigate to different menus, and **➡** to enter the selected menu.

### UNITS/MODE

| --Units/Mode-- |       |
|----------------|-------|
| ► Mode         | Flow  |
| Linear         | in    |
| Volume         | USG   |
| Multiplier     | x1    |
| Decimals       | 0     |
| Velocity       | ft/s  |
| Flow           | USG/m |
| Decimals       | 2     |
| Temperature    | F     |

At **Mode**, press the **➡** and then the **⬆** or **⬇** to select Flow or Velocity. Flow mode displays the flow rate in engineering units (e.g. gpm, litres/sec, etc.) Press the **✓** to store your selection then the **⬇** to the next menu item.

At **Linear** press the **➡** key and then the **⬆** or **⬇** to select your units of measurement. The Linear units define what units the pipe dimensions and sensor spacing will be displayed in. Typically inches or mm is selected. Press the **✓** to store your selection then the **⬇** to the next menu item.

At **Volume**, press the **➡** and then the **⬆** or **⬇** to select units for volume. Note: “bbl” denotes US oil barrels. Press the **✓** to store your selection then the **⬇** to the next menu item.

At **Multiplier**, press the **➡** and then the **⬆** or **⬇** to select the totalizer multiplier. Multipliers are used when resolution down to single digit is not required, or when you don’t want to convert from gallons to thousands of gallons, as an example. Press **✓** to store your selection then **⬇** to the next menu item.

At **Decimals (Volume)**, press the **➡** and then the **⬆** or **⬇** to select the number of decimal points to be present on the totalizer display on the LCD screen. Default = 0. Options = 0, 1, 2. Press the **✓** to store your selection then the **⬇** to the next menu item.

At **Velocity**, press the **➡** and then the **⬆** or **⬇** to select the engineering units for flow velocity and sonic velocity of the fluid. Press **✓** to store your selection then **⬇** to the next menu item.

| --Units/Mode----- |       |
|-------------------|-------|
| ► Mode            | Flow  |
| Linear            | in    |
| Volume            | USG   |
| Multiplier        | x1    |
| Velocity          | ft/s  |
| Flow              | USG/m |
| Temperature       | F     |

**UNITS/MODE (cont.)**


At Flow, press the ➡ and then the ⬆ or ⬇ to select the engineering units for flow rate. Press ✓ to store your selection then ⬇ to the next menu item.

Available Flow Rate Engineering Units:

| Abbreviation       | Description                         | Abbreviation      | Description                         |
|--------------------|-------------------------------------|-------------------|-------------------------------------|
| USG/d              | US gallons per day                  | L/d               | liters per day                      |
| USG/h              | US gallons per hour                 | L/h               | liters per hour                     |
| USG/m              | US gallons per minute               | L/m               | liters per minute                   |
| USG/s              | US gallons per second               | L/s               | liters per second                   |
| ft <sup>3</sup> /d | cubic feet per day                  | m <sup>3</sup> /d | cubic meters per day                |
| ft <sup>3</sup> /h | cubic feet per hour                 | m <sup>3</sup> /h | cubic meters per hour               |
| ft <sup>3</sup> /m | cubic feet per minute               | m <sup>3</sup> /m | cubic meters per minute             |
| ft <sup>3</sup> /s | cubic feet per second               | m <sup>3</sup> /s | cubic meters per second             |
| bbl/d              | barrels per day (1 bbl = 42 USG)    | IG/d              | Imperial gallons per day            |
| bbl/h              | barrels per hour (1 bbl = 42 USG)   | IG/d              | Imperial gallons per day            |
| bbl/m              | barrels per minute (1 bbl = 42 USG) | IG/d              | Imperial gallons per day            |
| bbl/d              | barrels per second (1 bbl = 42 USG) | IG/d              | Imperial gallons per day            |
| USMG/d             | US million gallons per day          | IMG/d             | Imperial million gallons per day    |
| USMG/h             | US million gallons per hour         | IMG/h             | Imperial million gallons per hour   |
| USMG/m             | US million gallons per minute       | IMG/m             | Imperial million gallons per minute |
| USMG/s             | US million gallons per second       | IMG/s             | Imperial million gallons per second |

At Decimals (Flow), press the ➡ and then the ⬆ or ⬇ to select the number of decimal points to be present on the flow rate display on the LCD screen. Default = 2. Options = 0, 1, 2. Press the ✓ to store your selection then the ⬇ to the next menu item.

At Temperature, press the ➡ and then the ⬆ or ⬇ to select units for temperature. Press the ✓ to store your selection then the ⬆ to go back to another menu item, or ⬅ to exit back to the Menu Selection screen.

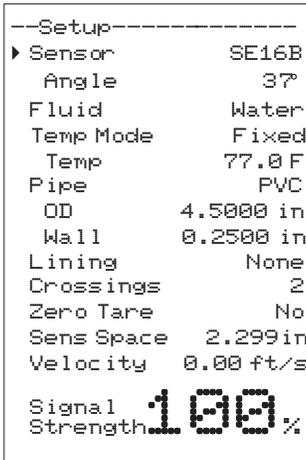

### SET UP

Press **↓** or **↑** to position cursor at Setup, and **→** to enter. Use **↓** or **↑** to position cursor before each menu item and **→** to enter. When settings are completed press **✓** to store and **✓** again to return to the Main Menu.

**Sensor Select** Choose SE16B or SE16A, depending on transducers connected to TTFM 6.1.

**Angle** For SE16B only, select angle which matches the transducer pair connected to the TTFM. Options: 35, 37, 39, and 41. Angle is determined by the part number on the SE16-B transducer label. Guide:

| Part Number on SE16-B Label | Corresponding Transducer Angle |
|-----------------------------|--------------------------------|
| SE16-B-35                   | 35                             |
| SE16-B-37                   | 37                             |
| SE16-B-39                   | 39                             |
| SE16-B-41                   | 41                             |

**Fluid** Select fluid type.

**Vel@25C** When Fluid = Other, enter the fluid velocity at 25C from table or other reference. Engineering units may be m/s or ft/s depending on Units menu programming.

**dV/C** When Fluid = Other, Enter fluid velocity adjustment factor over change in temperature in units of m/s or ft/s per °C.

**Temp Mode** Choose Fixed.


**Temp** Enter fluid operating temperature in displayed engineering units.

**Pipe** Select pipe material.

**Pipe Vel** When Pipe = Other, enter pipe material speed of sound (consult factory).

**OD** Highlight the digits and then **↑** or **↓** to change the numbers and decimal point. Pipe OD should be entered as the exact outside diameter of the pipe where the sensor is mounted. Refer to the Pipe Charts Appendix in this manual for outside diameter of common pipe types and sizes.

**Wall** Enter pipe wall thickness. Pipe wall thickness should be entered as the exact wall thickness of the pipe where the sensor is mounted. Refer to the Pipe Charts Appendix in this manual for wall thicknesses of common pipe types and sizes.

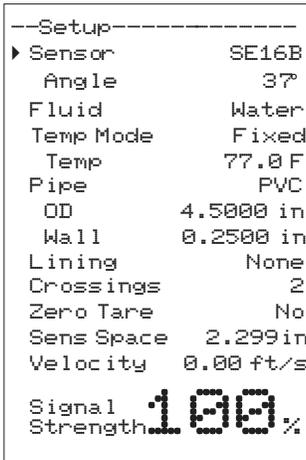




**Lining** Select liner material.

**SET UP (cont.)**

**Vel** When Lining = Other, enter speed of sound of liner (consult factory).

**Thick** When Lining ≠ None, enter liner thickness.

**Crossings**

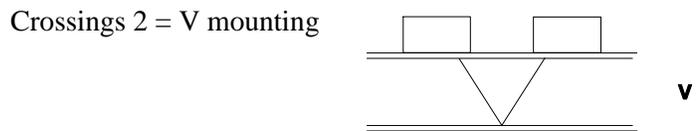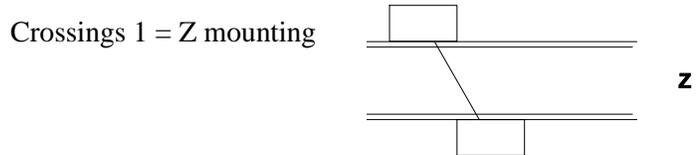

| Nominal Pipe Size, Inches | Recommended Crossings |
|---------------------------|-----------------------|
| 0.5-1.5                   | Crossings = 4         |
| 2-24                      | Crossings = 2         |
| > 24                      | Crossings = 1         |

Older pipes are often degraded or scaled on the inside. These conditions can hinder the ability to receive a strong signal when Crossings = 2. Greyline suggests starting with Crossings = 1 in cases such as these.

**Zero Tare** Used to calibrate zero-flow measured by the TTFM 6.1 in process. Flow in the pipe should be confirmed as 0 before enabling, or significant errors in flow accuracy could occur.

Set Calibration/Damping to 0%, and under no flow conditions and with a full pipe, select Yes to force readings to zero.

**Sens Space** After sensor, angle, fluid, and pipe material are defined, this displays the calculated sensor spacing. Also called the separation distance. The sensors will be set to this dimension when installed on the pipe, as described later in this manual.

**Velocity** Displays the measured velocity after the sensors have been connected at the specified separation distance.

```

--Setup-----
▶ Sensor      SE16B
  Angle       37
  Fluid       Water
  Temp Mode   Fixed
  Temp        77.0 F
  Pipe        PVC
  OD          4.5000 in
  Wall        0.2500 in
  Lining      None
  Crossings   2
  Zero Tare   No
  Sens Space  2.299 in
  Velocity    0.00 ft/s

Signal Strength 100%
  
```

**SET UP (cont.)**

**Signal Strength**

Displays magnitude of signal being received by the ultrasonic sensor. Should be 100% under ideal operating conditions. Signal strengths less than 100% do not indicate that the meter is not reliable, however, the meter may be more susceptible to complete signal loss should process conditions like entrapped air worsen. When signal strength is less than 100%, consideration should be made to using 1-cross mounting method if this is not the current mounting mode.

```

--Calibration-----
▶ Mode                Flow
 20mA                500.00 USG/m
 4mA                 0.00 USG/m
LOS Time             10 sec
Min Flow             4.00 USG/m
Damping
 Mode                FIR
 Percent             10%
 Window              1.0 ft/s
 Cal Constant        1.00
  
```

## CALIBRATION

Press **↓** or **↑** to position cursor at Calibration menu, and **➡** to enter. Use **↓** or **↑** to position cursor before each menu item and **➡** to enter. When settings are completed press **✓** to store and **✓** again to return to the Main Menu.

|                 |   |
|-----------------|---|
| <b>Mode</b>     | Displays the Mode which was selected in the Units/Mode menu. This is read-only.   |
| <b>20mA</b>     | Press <b>➡</b> then <b>↓</b> or <b>↑</b> to change the numbers and decimal point position. Use this menu to set the corresponding flow rate that will be represented by 20mA analog output. If maximum flow is unknown, enter an estimated flow rate and observe actual flow to determine the correct maximum value. Any velocity or flow rate up to +40 ft/sec (12.0 m/sec) may be selected.   |
| <b>4mA</b>      | Press <b>➡</b> then <b>↓</b> or <b>↑</b> to set the flow rate corresponding to 4mA analog output. This setting may be left at zero or can be raised to any value less than the 20mA setting, or lowered to any velocity or corresponding flow rate down to -40 ft/sec (-12 m/sec).  |
| <b>LOS Time</b> | Use LOS Time to suppress intermittent loss of signal. Example: systems with high concentrations of undissolved gasses will cause fluctuations in signal strength when the gasses move past the ultrasonic signal. If a complete loss of signal is experienced, the TTFM 6.1 will hold the last valid reading for the duration of the LOS Time. If the signal strength returns before the LOS Time is expired, because the ultrasonic signal is no longer being impeded, the meter will return to normal operation automatically. If signal strength does not return after the LOS Time has expired, then the meter will report zero flow on the LCD display and outputs, and produce a Low Signal alarm. Default LOS Time is 30 seconds, and the value can be set between 0 and 99 seconds. |
| <b>Min Flow</b> | Flow rates below this setting will be displayed as zero flow. Default flow rate is ~ 0.1 ft/sec for the pipe size programmed in the Setup menu.   |

```

--Calibration-----
▶ Mode           Flow
  20mA          500.00 USG/m
  4mA           0.00 USG/m
LOS Time        10 sec
Min Flow        4.00 USG/m
Damping
Mode            FIR
Percent         10%
Window          1.0 ft/s
Cal Constant    1.00
  
```

**CALIBRATION (cont.)**

**Damping**

**Mode** Choose between OFF, FIR (Default), or LOW PASS.

When measured flows are outside the Window of the running average, the FIR filter will reduce the damping average so that a fast response can be made to the sudden change in flow rate.

The LOW PASS filter will ignore measured flow rates outside the Window, while holding the running average, until there are enough data points outside the Window to cause a step-response to the new measured value.

While measured flows are within the Window of the running average, both the FIR and LOW PASS filter behave the same.

**Percent** Higher percentages increase the number of measurements which are averaged together to produce a stable flow reading. Higher percentages also increase the time it takes for the meter to make a step-response to the measured flow rate outside the Window in the LOW PASS Mode.

**Window** Defines the Window around the running average, in units of Velocity set in the Units/Mode menu. Measurements made inside the Window are added to the running average, and measurements outside the Window effect the response of the meter as described in the Mode section.

**Cal Constant** Calibration constant defined when the TTFM was calibrated at the Greyline factory.

Press ✓ to return to Menu Selections.

```

--Relay Parameters--
▶ Relay          1
  Function      Flow
  On            1000 USG
  Off           0.000 USG
  
```

## RELAY PARAMETERS

Press **↓** or **↑** to position cursor at Relay Parameters, and **→** to enter. Use **↓** or **↑** to position cursor before each menu item and **→** to enter. When settings are completed press **✓** to store and **✓** again to return to the Main Menu.

**Relay** Press **→** and **↓** or **↑** to select a corresponding relay number (2 relays are standard, 4 additional are optional).

**Function** Press **↓** or **↑** to select **Off**, **On**, **Pulse**, **Direction**, or **Flow**.

**Pulse** Press **↓** and set digits to the flow volume increment required between relay pulses. Use this feature for remote samplers, chlorinators or totalizers. Minimum time between pulses is 2.25 seconds and pulse duration is 350 milliseconds.

Return to **Relay** and change settings for each relay number.

Press **✓** to return to **Menu Selections**.

**Direction** When flow is in the positive direction, the relay will be disengaged, when flow is negative, the relay engages. Note: Rev. Flow in the Special Functions menu must be **ON** or **INVERT** for this to work properly.

**Flow** Mode Select **PUMP**

**PUMP** mode provides separate On/Off settings where the relay will energize at one flow rate and de-energize at another.

**On** Highlight the numerals and press **↓** or **↑** to set digits to the required relay **On** set point.

**Off** set digits to the required **Off** set point.

```

--Data Logging--
Log Site ID      00
                 99
Mode             Flow
                 Velocity
Set Date        Feb 18/2008
Set Time        11:27:40
Interval        10sec
                 60min
                 30min
                 15min
                 10min
                 5min
                 2min
                 1min
                 30sec
Log             Stop
                 Start
                 Delete
  
```

## DATA LOGGING

Press **↓** or **↑** to position cursor at Data Logging, and **→** to enter. Use **↓** or **↑** to position cursor before each menu item and **→** to enter. When settings are completed press **✓** to store and **✓** again to return to the Main Menu.

**Log Site ID** Enter a number from 00 to 99. The site ID will become part of the downloaded file name to help distinguish downloads from different instruments. Press **✓** to store the setting.

**Mode** Select Velocity (e.g. ft/sec or m/sec) or Flow (e.g. USGPM or l/sec). Press **✓** to store the setting. This setting cannot be changed after a log was started. To change, first stop the log, then change the mode.

**File Format** Choose .LG2 to download data in .lg2 format for viewing on Greyline Logger software. Choose .CSV to download data in .csv format for import directly to Excel. This menu option can be changed at any time without adversely affecting existing data.

**Date** Press **→**, and **↑** or **↓** to scroll and select Month, Day and Year. Press **✓** to store the setting.

**Time** Press **→**, and **↑** or **↓** to select the current time in Hours, Minutes and Seconds. Press **✓** to store the setting.

**Interval** Press **↑** or **↓** to select the logging interval. Press **✓** to store the setting. Greyline recommends choosing an interval which will give you as much resolution as required and no more. Choosing too often of an interval for what is required will result in larger data files, which may take a long time to download to USB. Reference page 18 for specific download times. In critical installations, data should be downloaded often.

**Data Log** Stop, Start or Delete the log file. Press **↑** or **↓** to select Delete and **✓** to delete the log file. Press **↑** or **↓** to select Start and **✓** to start the logger.

**Important Note:** You MUST Delete an old log and Start a new log AFTER having made changes to Log Site ID, Mode, Date, Time and/or Interval for those changes to be applied.

**Important Note:** Changing any of the parameters in the Units/Mode menu will start a new log. It is recommended that you Delete and start a new log after changing any Units/Mode settings.

### RETRIEVING LOG FILE

Plug a USB Flash Memory Drive (one is included with the TTFM 6.1) into the USB output port on the Panel of the meter. The instrument display will show the data download icon until the log file is transferred to the memory card. The USB flash drive may be removed when the icon for download successful appears.

Download file names will appear in this format:

TTFM\_ \_00A.LG2  
↑           ↑   ↑  
MODEL      TAG   DOWNLOAD

Tag is set according to the Log Site ID entered in the instrument Data Logging menu.

Download letter will be A for the first download from an instrument. B for the second, then C etc. At the letter Z a - character will appear indicating that the maximum number of downloads for that instrument are on the USB flash drive. Older files can be erased or moved from the flash memory drive or a new memory drive can be used.


**Note:** Downloading files in .lg2 format will take approximately 35 seconds per 1% of internal log memory used.  
Downloading files in .csv format will take approximately 8 minutes per 1% of internal log memory used.

### OPENING .LG2 FILES

Install Greyline Logger on your PC or laptop. Select File/Open/Instrument Log (.log) to open the log file from your USB flash drive. Greyline Logger software is available on Greyline's website, [www.greyline.com](http://www.greyline.com). Data can also be converted to .CSV via Greyline Logger software.

### OPENING .CSV FILES

Use a datasheet program such as Microsoft Excel® to import data in a comma delimited format. Use Excel to manipulate or graph data.




### COMMUNICATION (Optional)

Press  $\downarrow$  or  $\uparrow$  to position cursor at Communication, and  $\rightarrow$  to enter. Use  $\downarrow$  or  $\uparrow$  to position cursor before each menu item and  $\rightarrow$  to enter. When settings are completed press  $\checkmark$  to store and  $\checkmark$  again to return to the Main Menu.

#### MODBUS Protocol Information:

Transceiver: 2-wire, half-duplex  
 Data format: 8 Data Bits  
 Floating Point Byte Order: ABCD  
 Termination: Jumper JP1 selectable 120 $\Omega$  resistor. TB1 & TB2 = OFF,  
 TB2 & TB3 = ON  
 Biasing: None

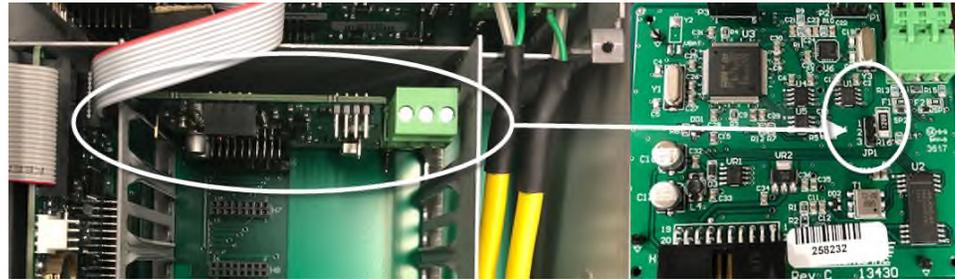

#### HART® (Highway Addressable Remote Transducer) Protocol Information:

HART Version: 7.0

**Device Description Files:** DD files allow the user's handheld HART communicator to fully configure the TTFM 6.1 Greyline provides DD files for the Emerson 475 Communicator. The files are included in the USB drive provided with your TTFM 6.1 meter. You may also request the files from Greyline by calling or emailing us at [info@greyline.com](mailto:info@greyline.com). **Warning:** The TTFM 6.1 and associated DDs are pending certification from the Fieldcomm Group.

**Connections:** HART Protocol uses a digital signal superimposed on the 4-20mA output. When the 4-20mA output of the TTFM 6.1 is connected with a load resistor (230 $\Omega$  to 600 $\Omega$ ), the HART communicator can be connected on the loop in order to communicate.

**Protocol** Choose MODBUS or HART.

**Address (Modbus)** Device address for the TTFM. Valid range: 001-247 (Default: 001). This number should be unique across the bus. Press  $\uparrow$  or  $\downarrow$  to scroll,  $\rightarrow$  to select digits, and press  $\checkmark$  to store the setting.

| --Communication-- |        |
|-------------------|--------|
| Protocol          | Modbus |
| Address           | 001    |
| BPS               | 9600   |
| Parity            | Even   |
| Stop Bits         | 1      |

**COMMUNICATION (Optional) (cont.)**

**BPS (Modbus)** Baud rate for the MODBUS communications. Press **↑** or **↓** to select, and **✓** to store the setting. Options: 4800, 9600, 19200, 38400, 57600, 76800, and 115200 (Default: 9600).

**Parity (Modbus)** Error checking parity for the MODBUS communications. Press **↑** or **↓** to select, and **✓** to store the setting. Options: None, Even, and Odd (Default: Even).

**Stop Bits (Modbus)** Press **↑** or **↓** to select, and **✓** to store the setting. Options: 1 or 2 (Default: 1).

**Note:** The Modbus register table, and HART configuration instructions can be found in separate TTFM 6.1 Serial Communications Manual.

```

--Special Functions--
▶ Language      English
Analog Out     4-20mA
Backlight      High
Reset Totalizer NO
Neg. Totals    NO
Rev. Flow      OFF
Capture Par    NO
Capture WF     NO
Restore Defaults NO
New Password   0000
  
```

### SPECIAL FUNCTIONS

Press **↓** or **↑** to position cursor at Special Functions, and **→** to enter. Use **↓** or **↑** to position cursor before each menu item and **→** to enter. When settings are completed press **✓** to store and **✓** again to return to the Main Menu.

- |                 |   |
|-----------------|---|
| Language        | Select English, French or Spanish   |
| Analog Out      | Select 4-20mA or 0-5V mode for the analog output.   |
| Backlight       | Select High, Medium or Low for continuous backlight brightness.<br><br>Select <b>Key Hi/Lo</b> for high backlight lasting 1 minute after a keypress, and then <b>Lo</b> backlight until a key is pressed again.<br><br>Select <b>Key High, Med</b> or <b>Low</b> for backlight lasting 1 minute after a keypress and then backlight off until a key is pressed again. |
| Reset Totalizer | Select <b>Yes</b> to erase and restart the totalizer at zero.   |
| Negative Totals | Select <b>Yes</b> to have reverse flow readings deducted from the totalizer. Select <b>No</b> to totalize forward flow only and ignore reverse flow.  |
| Rev. Flow       | Select <b>On</b> to enable flow direction measurement. Select <b>Off</b> to disable flow direction measurement so that flow in either direction is displayed and output as positive values.<br>Select <b>Invert</b> to invert the sense of the flow measurement.  |
| Capture Par     | This function captures the programming parameters in the meter. Select <b>Yes</b> , wait for <b>Insert USB</b> to appear, then insert a USB drive into the USB port to transfer the parameters. After Saving flashes, <b>Done</b> will appear on the screen, meaning it is safe to remove the USB,  |

**SPECIAL FUNCTIONS (cont.)**

```

--Special Functions--
▶ Language      English
Analog Out     4-20mA
Backlight      High
Reset Totalizer NO
Neg. Totals    NO
Rev. Flow      OFF
Capture Par    NO
Capture WF     NO
Restore Defaults NO
New Password   0000
  
```

**Capture WF**

This function should only be used when instructed by a Greyline representative to do so. The function captures the ultrasonic signal so that it can be evaluated by Greyline.

Select **Yes** to start the waveform download process. After pressing **Yes**, the screen will flash **Working** for approximately 20 seconds, until the message **Insert USB** appears. When **Insert USB** is on the screen, connect a flash drive to the USB port on the front of the meter. The screen will flash **Saving** for a couple seconds, and then return to **Done**. The waveform is now stored on your flash drive and ready to be sent to Greyline.

**Restore Defaults**

Select **Yes** to erase all user settings and return the instrument to factory default settings. Note: does not reset factory calibration values.

**New Password**

Select any number from 0000 to 9999. Default setting of 0000 will allow direct access to the calibration menus. Setting any password other than 0000 will require the password to be entered to access the calibration menus.

Press **✓** to return to **Menu Selections**.

| --Simulation----- |             |
|-------------------|-------------|
| ▶Test             | Actual      |
| Flow              | 250USG/m    |
| 4-20mA Flow       | 5.60mA      |
| Relays            | 1 2 3 4 5 6 |

### SIMULATION

Press **↓** or **↑** to position cursor at Simulation, and **➡** to enter. Use **↓** or **↑** to position cursor before each menu item and **➡** to enter. When settings are completed press **✓** to store and **✓** again to return to the Main Menu.


Changes made in the Simulation menu exercise the 4-20mA output, digital display and control relays.

Simulate a **Flow/Velocity** reading. Press **➡** and then **↓** or **↑** to change the simulated output. Press **✓** to begin simulation. The 4-20mA output and relay states will be displayed on the screen below.


Press the **✓** to terminate simulation and return to the **Menu Selections** screen.

**TYPICAL SE16B SENSOR INSTALLATION**

**2 Cross Separation Distance**

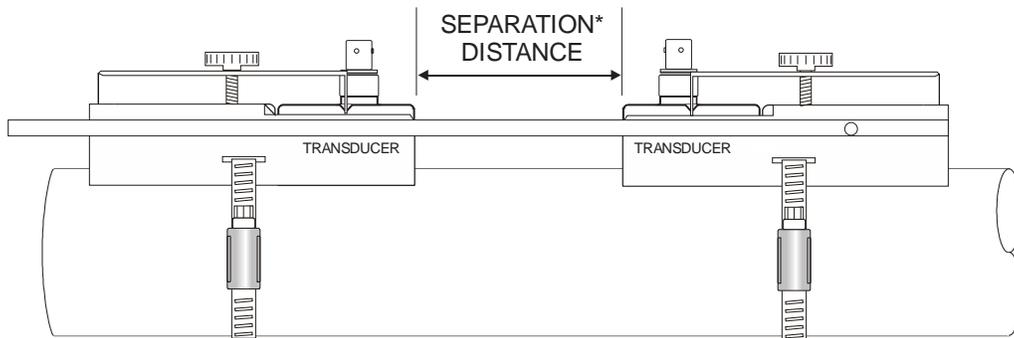

**1 Cross Separation Distance**

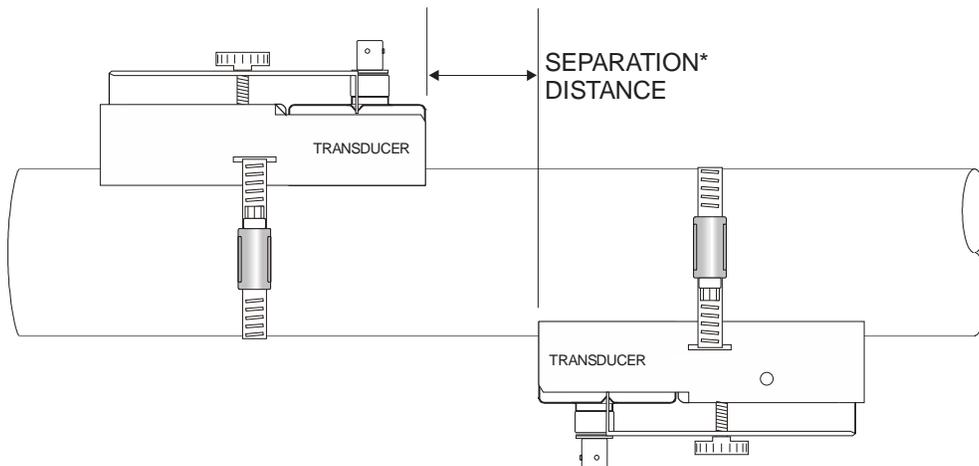


\* Shown in 'Setup' menu after sensor, fluid and pipe parameters are entered.

TMK-B1 transducer mounting kit shown. Sensor spacing method is consistent with TMK-B21 and TMK-B22 kits, but the brackets will be different.

**TYPICAL SE16A SENSOR INSTALLATION**

2 or 4 Cross Separation Distance

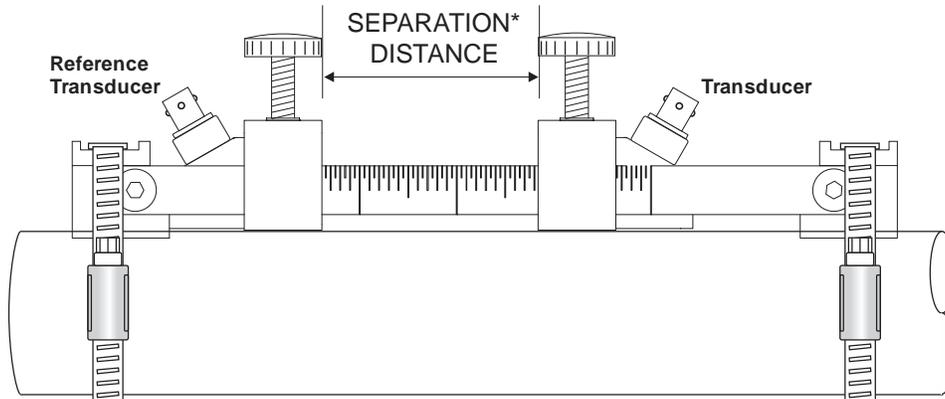

\* Shown in 'Setup' menu after sensor, fluid and pipe parameters are entered.

Separation distance is measured from transducer face to transducer face.  
Reference transducer is placed flush to bracket.


Mount the supplied SE16A Series Transducers on pipes 0.5" / 15 mm OD or larger.

**SE16B Pipe Preparation and Bracket Mounting**

Prepare an area 2" wide by 4" long (50mm x 100mm) for each sensor bonding by removing loose paint, scale and rust. The objective of site preparation is to eliminate any discontinuity between the sensor and the pipe wall, which would prevent acoustical coupling. A sanding block is included with every meter to facilitate proper pipe preparation.


A Sensor Mounting Kit is supplied with each Greyline flow meter. It includes recommended coupling compound and a stainless steel mounting bracket with adjustable pipe straps. Use the Alignment Bar (included) to align sensor brackets for V and W mode mounting.

**IMPORTANT:** The SE16-B transit-time transducers have arrows on the top of them. These should face each other at installation.

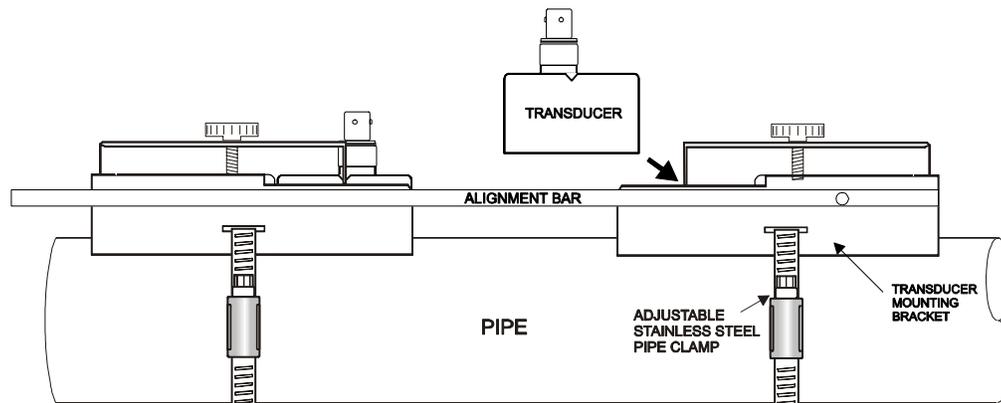

Mount the Mounting Bracket as illustrated on pipes 2" / 50 mm OD or larger. Stainless steel bands are included for mounting on pipes up to 30" / 750 mm OD.

Additional stainless steel bands (provided by customer) may be combined to mount on larger pipes. TMK-B1 Installation Kit shown.

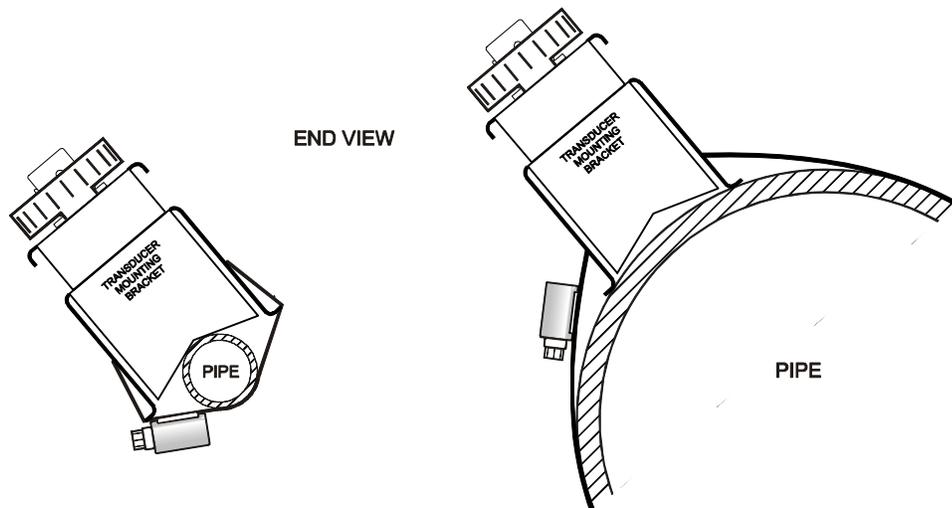


### SE16A Pipe Preparation and Bracket Mounting

Prepare an area 2" wide by 10" long (50mm x 250mm) for the track mounting bracket by removing loose paint, scale and rust. The objective of site preparation is to eliminate any discontinuity between the sensor and the pipe wall, which would prevent acoustical coupling. A sanding block is included with every meter to facilitate proper pipe preparation.

A Sensor Mounting Kit is supplied with each Greyline flow meter. It includes recommended coupling compound and a stainless steel mounting bracket with adjustable pipe straps. Use the built-in ruler to easily measure separation distance between transducer faces.

**IMPORTANT:** The SE16-A transit-time transducers should be installed with the cable connections pointed away from each other, as shown in the drawing below.

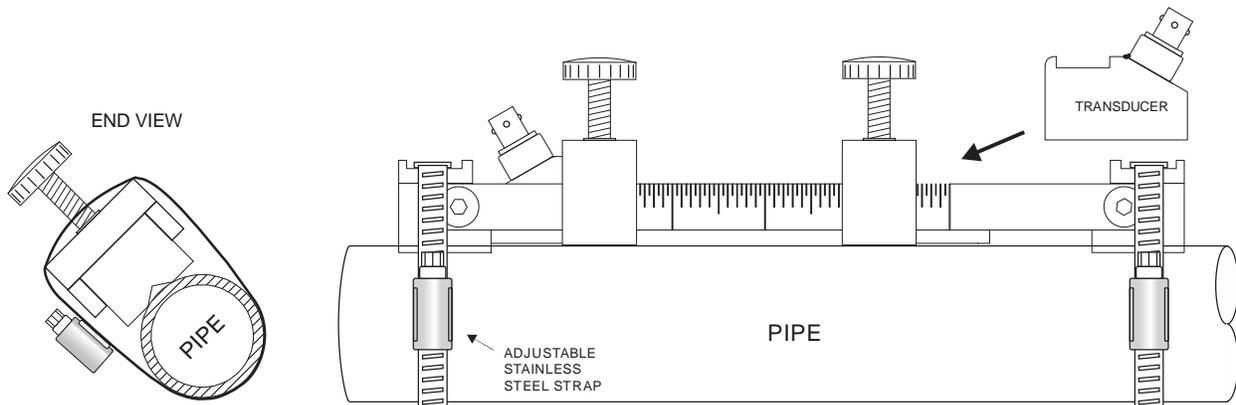


Mount the supplied SE16A Series Transducers on pipes 0.5" / 15 mm OD or larger.

## SENSOR COUPLING

For permanent or temporary bonding, the following are recommended:


- a) Super Lube® (supplied)  
Additional supply: order Greyline Option CC-SL30 or your local home improvement store.
- b) Water-based sonic compound: Order Greyline Option CC30
- c) Electrocardiograph gel
- d) Petroleum gel (Vaseline)

The above are arranged in their order of preferred application. Option d is only good for temporary bonding at room temperature. **DO NOT USE:** Silicon RTV caulking compound (silicon rubber).




Use the pipe clamp and rail (supplied) as illustrated on previous page. Apply Super Lube® to the colored face of the sensor. A bead, similar to toothpaste on a toothbrush, is ideal. Do not overtighten (crush the sensor).

The sensor must be fixed securely to the pipe with coupling material between the sensor face and the pipe. Sensor installation with excessive coupling compound can result in gaps or voids in the coupling and cause errors or loss of signal. Insufficient coupling compound will create similar conditions.

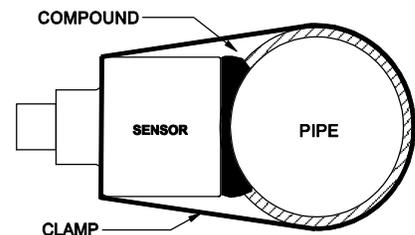

Over time temporary coupling compounds (e.g. Petroleum Gel) may gradually sag away from the sensor resulting in reduced signal strength and finally complete loss of signal. Warm temperatures, moisture and vibration will accelerate this process. Super Lube® as supplied with the TTFM 6.1 (and available from Greyline Instruments or home improvement stores) is recommended for permanent installations.

### **Transducer Installation in Wet Locations**


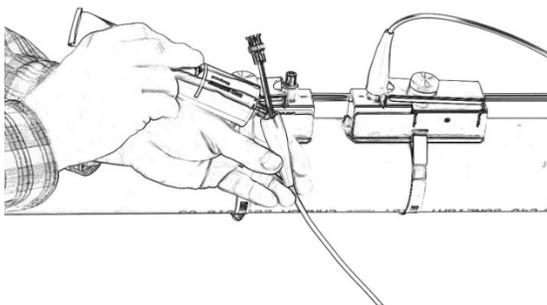


The TTFM 6.1 Transit Time Flowmeter transducers are rated for accidental submersion up to 10 psi (0.75 bar). The flowmeter will continue to operate and measure flow accurately during periods of submergence. Plastic seal jackets on the cables must be filled with coupling compound to provide additional moisture protection for the BNC cable connectors.

## SENSOR MOUNTING LOCATION

The position of the sensor is one of the most important considerations for accurate flow measurement. The same location guidelines apply to Transit Time as most other flow meter technologies.

**VERTICAL OR HORIZONTAL PIPE** - Vertical pipe runs are acceptable, and the transducers can be mounted in any orientation around the pipe. Downward flow should be avoided in case the pipe becomes partially filled or aerated. On Horizontal pipes and liquids with high concentrations of gas or solids, the sensors should be mounted on the side (1 to 5 o'clock positions) to avoid concentrations of gas at the top of the pipe, or solids at the bottom.

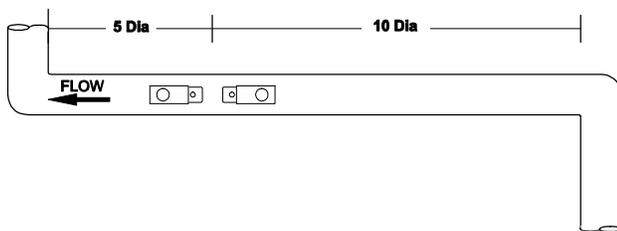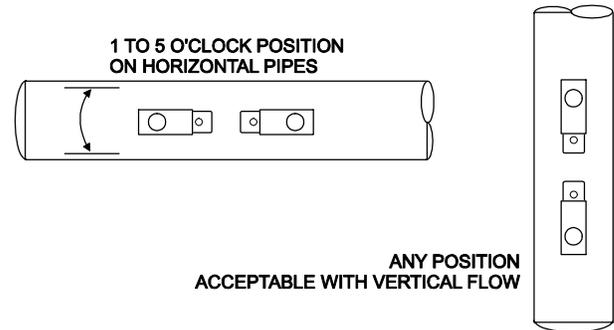

**STRAIGHT RUN REQUIREMENTS** – For best results, the transducers must be installed on a straight run of pipe, free of bends, tees, valves, transitions, insertion probes and obstructions of any kind. **For most installations, ten straight unobstructed pipe diameters upstream and five diameters downstream of the transducers is the minimum recommended distance for proper operation.** Additional considerations are outlined below.

- Do not, if possible, install the transducers downstream from a throttling valve, a mixing tank, the discharge of a positive displacement pump or any other equipment that could possibly aerate the liquid. The best location will be as free as possible from flow disturbances, vibration, sources of heat, noise, or radiated energy.
- Avoid mounting the transducers on a section of pipe with any external scale. Remove all scale, rust, loose paint, etc., from the location prior to mounting the transducers. A sanding block is included with every meter to facilitate proper pipe preparation.
- Do not mount the transducers on a surface aberration (pipe seam, etc.).
- Do not mount transducers from different ultrasonic flow meters on the same pipe.
- Do not run the transducer triaxial cables in common bundles with cables from other instrumentation. You can run these cables through a common conduit **ONLY** if they originate at the same flow meter.
- Never mount transducers under water.

**IMPORTANT NOTE:** In some cases, longer straight runs may be necessary where the transducers are placed downstream from devices which cause unusual flow profile disruptions or swirl. For example: modulating valves, or two elbows in close proximity and out of plane.

### **SEPARATION DISTANCE (Sensor Spacing Distance)**

Separation distance is automatically calculated by the TTFM 6.1 based on parameters entered in the Setup menu. Sens Space is parameter where this distance is given, and it is located in the Setup menu. Document this value for the following transducer installation procedure.

### **2 OR 4 CROSS INSTALLATION OVERVIEW – SE16B TMK-B1 Kit**

1. Prep the pipe per instructions on page 29, and mind the installation location requirements on page 32. Clean the location where the sensor is to be mounted on the opposite side of the pipe after we've marked where it will be installed. Picture below shows a very clean ductile iron pipe which did not require much cleaning. The outside paint is very well bonded and did not need to be removed:



2. Install the stainless steel mounting brackets on the pipe. Position them at approximately the correct separation distance. Exact measurement is not required at this time. Tip: Use a 5/16" nut driver to tighten the hose clamps.

*Procedure continued on the next page...*

**2 OR 4 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B1 Kit (Cont.)**

3. Use alignment bar to ensure the brackets are parallel. Completion of steps 2 & 3 is shown below.




4. Mark the position of the permanent bracket on the pipe. This is the bracket that will not be adjusted, and will be used as the reference for the separation distance and alignment. It is your choice which bracket is permanent. With a marker, mark the bracket position by placing the mark directly in front of the stainless side-rail.



**2 OR 4 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B1 Kit (Cont.)**

5. Measure the separation distance from the mark you created in step 4, and create a new mark on the pipe at the separation distance. It may be useful to mark your Greyline tape measure (included with every meter) at the separation distance point before marking the pipe. The marked pipe is shown below.

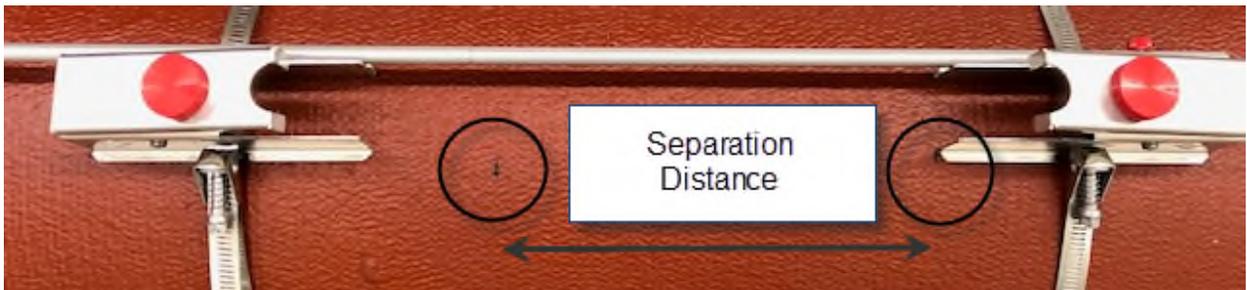

6. Move the non-permanent bracket to position at the mark you created at step 5, and tighten it completely. Apply coupling compound to the transducers, and install them in the brackets.

Tips for installing transducers:

- a. Be sure the red knob on the brackets are loosened completely
- b. Put the transducer into the bracket by ensuring the bottom of the transducer and the couplant does not touch the pipe as you slide it in. (Hover)
- c. With the transducer hovering, tighten the red knob on the bracket until tight. The transducer will be level with the surface of the pipe, and no grease will have smeared off.

(pictures of proper coupling application and finished installation on the next page)

**2 OR 4 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B1 Kit (Cont.)**

Proper coupling compound application:



Finished installation, ready for cable connection:



7. If you need to make fine adjustments ( $\pm 0.25''$ ) to the spacing at this point, you may do so by loosening the hose clamps slightly, and sliding the brackets while the transducers are installed inside them. Tighten hose clamps when done.

## **SEPARATION DISTANCE (Sensor Spacing Distance)**

Separation distance is automatically calculated by the TTFM 6.1 based on parameters entered in the Setup menu. Sens Space is parameter where this distance is given, and it is located in the Setup menu. Document this value for the following transducer installation procedure.

### **1 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B1 Kit**

To assist with the proper installation of the transducers in a 1 cross installation, we provide a kit with every meter, which consists of the following:

- Sanding block
- Tape measure
- Mylar sleeve
- Duct tape
- Level
- Black Sharpie

Follow along with the 1 cross installation instructions on the following pages for a description of where to use these tools.

1. Prep the pipe per instructions on page 29, and mind the installation location requirements on page 32. Clean the location where the sensor is to be mounted on the opposite side of the pipe after we've marked where it will be installed. The picture below shows a very clean ductile iron pipe which did not require much cleaning.



**1 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B1 Kit (Cont.)**

2. Install one of the stainless steel mounting brackets on the pipe. This will be the stationary bracket not being rotated to the opposite side of the pipe. For a horizontal pipe, position the bracket at 3 or 9 o'clock. Hold the level up to the top of the bracket to ensure the angle is correct. For vertical pipes, the bracket can be at any orientation about the pipe. Tip: Use a 5/16" nut driver to tighten the hose clamp. Install the second bracket at approximately the distance specified by the Sens Space value in the Setup menu.



3. Use alignment bar to ensure that the brackets are parallel. Completion of steps 2 and 3 is shown below.



**1 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B1 Kit (Cont.)**

4. Mark the position of the bracket on the pipe. Mark both where the front of the bracket is, as well as the center of the bracket.



5. Measure the separation distance from the marks you created in step 4, and create new marks on the pipe at the separation distance. It may be useful to mark your Greyline tape measure at the separation distance before holding it up to and marking the pipe.



**1 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B1 Kit (Cont.)**

6. Using the mylar sleeve included with the installation kit, wrap it around the pipe, keep it taut, and with the Sharpie, draw a line anywhere the sleeve overlaps:





7. Lay the mylar sleeve flat, use duct tape to help hold it flat if you need to, and use the tape measure to measure half way between the two marks created when you wrapped the mylar around the pipe:



**1 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B1 Kit (Cont.)**

8. Position the marked mylar back on the pipe, with the overlap marks on the center line of the transducer bracket that will be rotated to the other side of the pipe. Be sure the mylar is parallel with the face of the transducer. Use duct tape to hold the mylar together and to the pipe. While the mylar is in this position, mark the opposite side of the pipe where the mylar is marked from step 7:

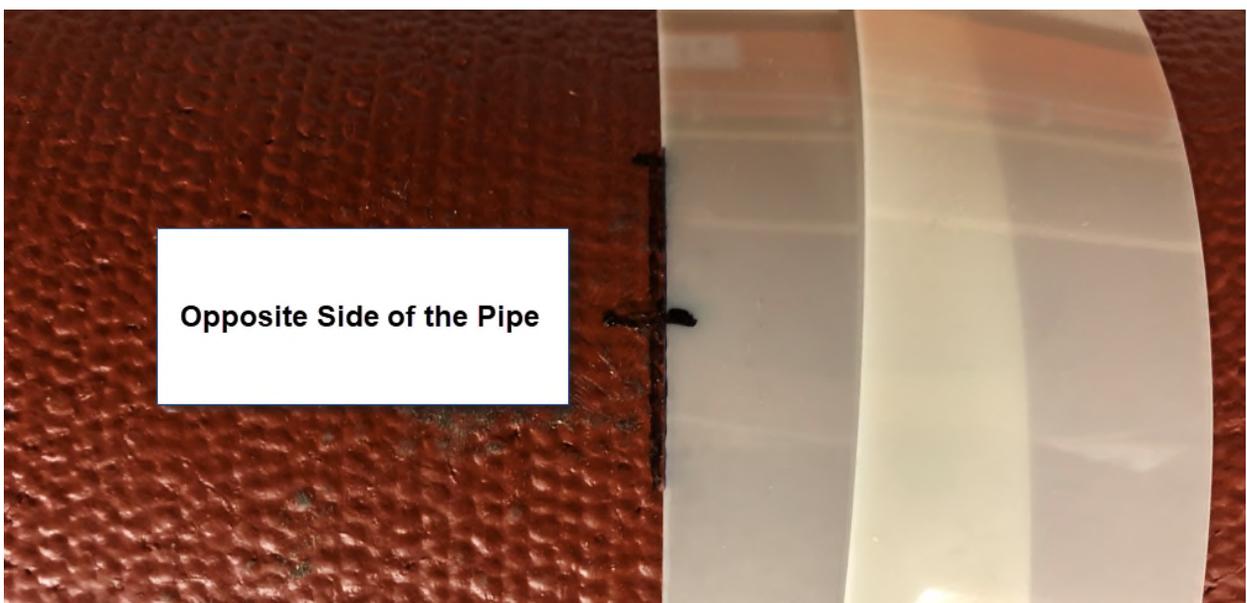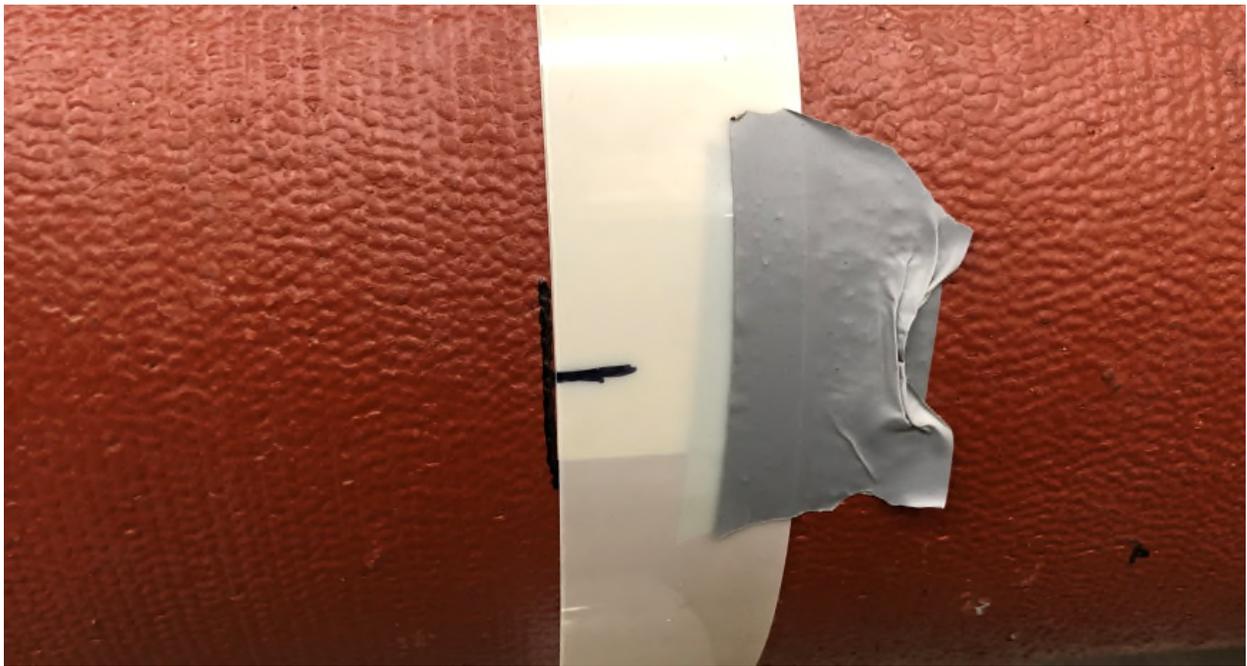

**1 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B1 Kit (Cont.)**

9. Sand the pipe at this position if it needs to be prepped because of scale or rust. After prepped, move the bracket to this 1 cross mark, and tighten it in place. Apply coupling compound to the transducers and place them in the brackets:

Tips for installing transducers:

- a. Be sure the red knob on the brackets are loosened completely.
- b. Put the transducer into the bracket by ensuring the bottom of the transducer and the couplant does not touch the pipe as you slide it in (hover).
- c. With the transducer hovering, tighten the red knob on the bracket until tight. The transducer will be level with the surface of the pipe, and no grease will have smeared off from inserting the transducer in the bracket.

Proper coupling compound application:



**1 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B1 Kit (Cont.)**

Finished installation:



10. If you need to make fine adjustments ( $\pm 0.25''$ ) to the spacing at this point, you may do so by loosening the hose clamps slightly, and sliding the brackets while the transducers are installed inside them. Tighten the hose clamps when done.

**SEPARATION DISTANCE (Sensor Spacing Distance)**

Separation distance is automatically calculated by the TTFM 6.1 based on parameters entered in the Setup menu. Sens Space is parameter where this distance is given, and it is located in the Setup menu. Document this value for the following transducer installation procedure.

**2 OR 4 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B21 or TMK-B22 Kit**

1. Prep the pipe per instructions on page 29, and mind the installation location requirements on page 32. Clean the location where the sensor is to be mounted on the opposite side of the pipe after we've marked where it will be installed. Picture below shows a very clean ductile iron pipe which did not require much cleaning. The outside paint is very well bonded and did not need to be removed:



**2 OR 4 CROSS INSTALLATION OVERVIEW - SE16B Transducers TMK-B21 or TMK-B22 Kit (Cont.)**

2. Install the spacer bar onto the right bracket as shown below:



3. Insert the spacer bar into the left bracket, and position the bracket at the separation distance referenced earlier. Tighten the spacer bar clamp at this position:



**2 OR 4 CROSS INSTALLATION OVERVIEW - SE16B Transducers TMK-B21 or TMK-B22 Kit (Cont.)**

4. Place the bracket assembly on the pipe, tighten it in place with the two hose clamps:



5. Apply coupling compound to the transducers, and install them in the brackets.

Tips for installing transducers:

- a. Be sure the tightening Phillips screw on the top of the bracket is loosened completely.
- b. Put the transducer into the bracket by ensuring the bottom of the transducer and the couplant does not touch the pipe as you slide it in. (Hover)
- c. Tighten the Phillips screws on the bracket until tight. The transducer will be level with the surface of the pipe, and no grease will have smeared off.

(pictures of proper coupling application and finished installation on the next page)

**2 OR 4 CROSS INSTALLATION OVERVIEW - SE16B Transducers TMK-B21 or TMK-B22 Kit (Cont.)**

Proper coupling compound application:



Finished installation, ready for cable and conduit connection:



6. If you need to make fine adjustments ( $\pm 0.25''$ ) to the spacing at this point, you may do so by loosening the hose clamps slightly, and sliding the brackets while the transducers are installed inside them. Tighten hose clamps when done.

## **SEPARATION DISTANCE (Sensor Spacing Distance)**

Separation distance is automatically calculated by the TTFM 6.1 based on parameters entered in the Setup menu. Sens Space is parameter where this distance is given, and it is located in the Setup menu. Document this value for the following transducer installation procedure.

### **1 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B21 or TMK-B22 Kit**

To assist with the proper installation of the transducers in a 1 cross installation, we provide a kit with every meter, which consists of the following:

- Sanding block
- Tape measure
- Mylar sleeve
- Duct tape
- Level
- Black Sharpie

Follow along with the 1 cross installation instructions on the following pages for a description of where to use these tools.

1. Prep the pipe per instructions on page 29, and mind the installation location requirements on page 32. Clean the location where the sensor is to be mounted on the opposite side of the pipe after we've marked where it will be installed. The picture below shows a very clean ductile iron pipe which did not require much cleaning.




**1 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B21 or TMK-B22 Kit (Cont.)**

2. Install the spacer bar onto the right bracket as shown below:



3. Insert the spacer bar into the left bracket, and position the bracket at the separation distance referenced earlier. Tighten the spacer bar clamp at this position:

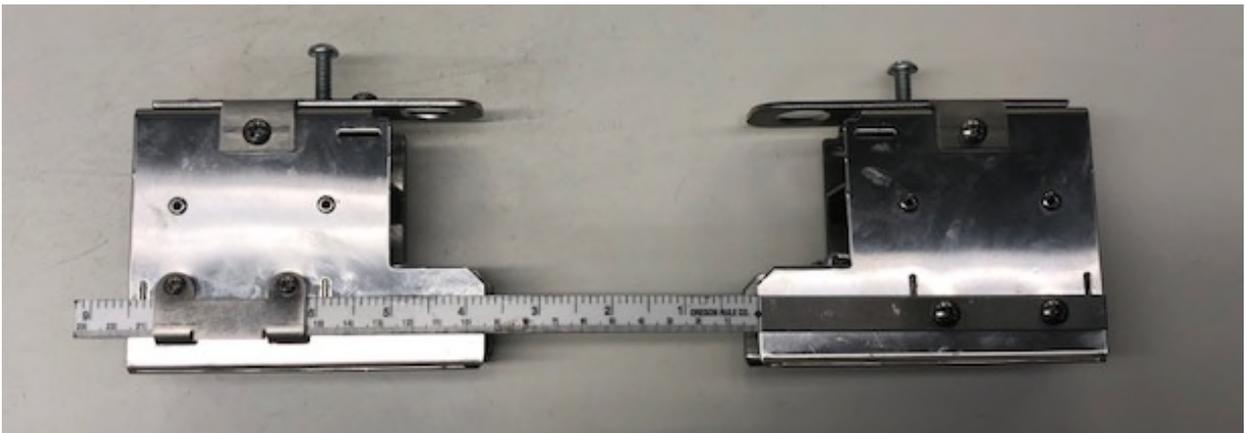

**1 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B21 or TMK-B22 Kit (Cont.)**

4. Place the bracket assembly on the pipe, tighten it in place with the two hose clamps. For a horizontal pipe, position the bracket at 3 or 9 o'clock. Hold the level up to the top of the bracket to ensure the angle is correct. For vertical pipes, the bracket can be at any orientation about the pipe. Tip: Use a 5/16" nut driver to tighten the hose clamp.



5. Mark the position of the center line of the bracket which is to be moved to the opposite side of the pipe. It is up to you to determine which bracket is easier to move from the current position:



**1 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B21 or TMK-B22 Kit (Cont.)**

6. Using the mylar sleeve included with the installation kit, wrap it around the pipe, keep it taut, and with the Sharpie, draw a line anywhere the sleeve overlaps:





7. Lay the mylar sleeve flat, and use the tape measure to measure half way between the two marks created when you wrapped the mylar around the pipe:



**1 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B21 or TMK-B22 Kit (Cont.)**


8. Position the marked mylar back on the pipe, with the overlap marks on the center line of the transducer bracket that will be rotated to the other side of the pipe. Be sure the mylar is parallel with the face of the transducer. Use duct tape to hold the mylar together and to the pipe. While the mylar is in this position, mark the opposite side of the pipe where the mylar is marked from step 7:

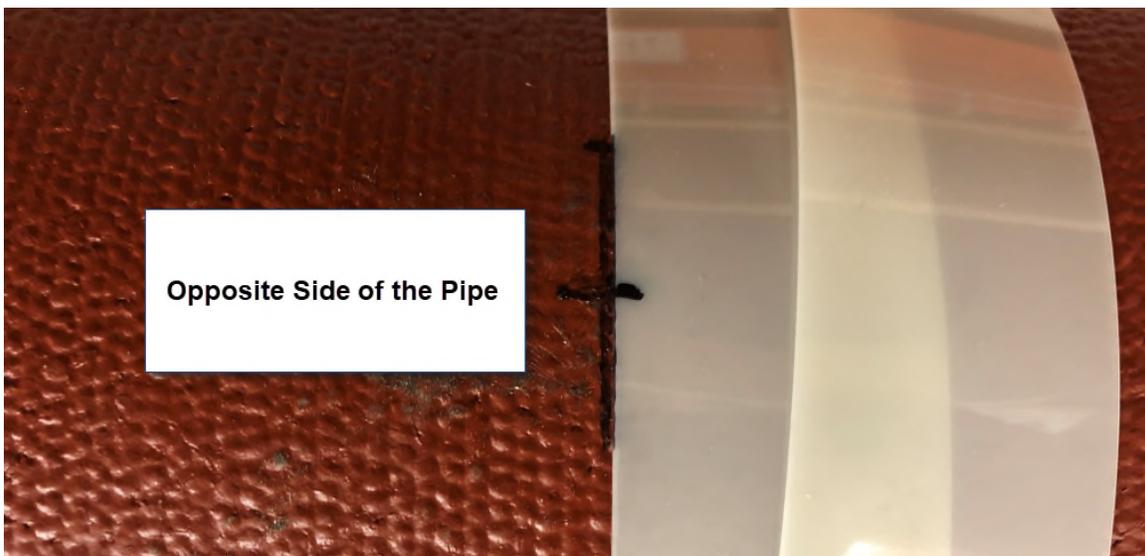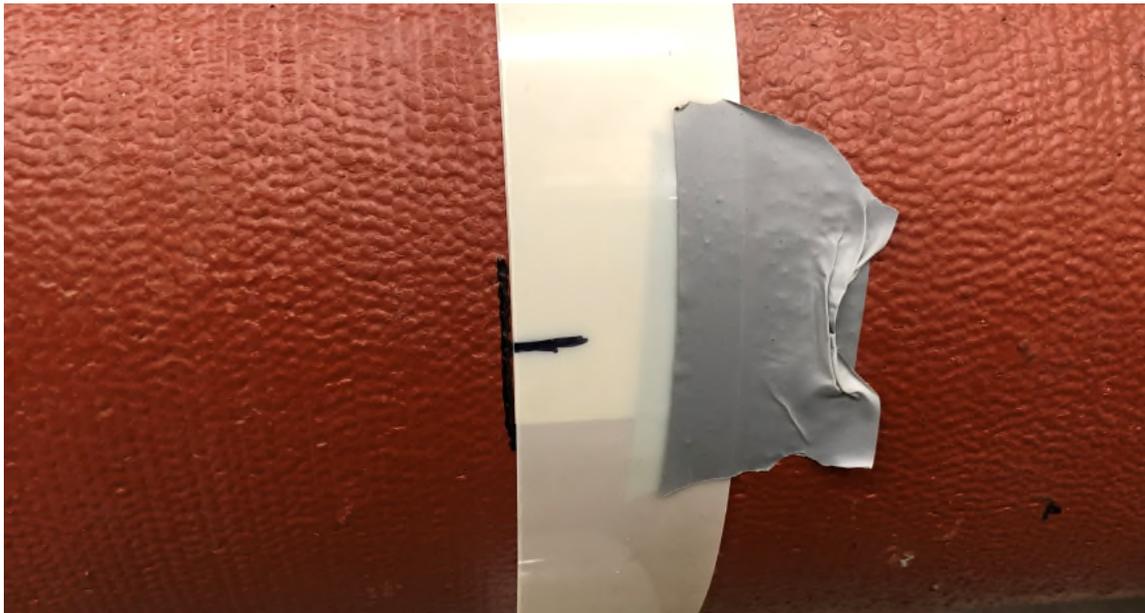


**1 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B21 or TMK-B22 Kit (Cont.)**

9. Sand the pipe at this position if it needs to be prepped because of scale or rust. After prepped, move the bracket to this 1 cross mark, and tighten it in place. Apply coupling compound to the transducers and place them in the brackets:

View from front of pipe:

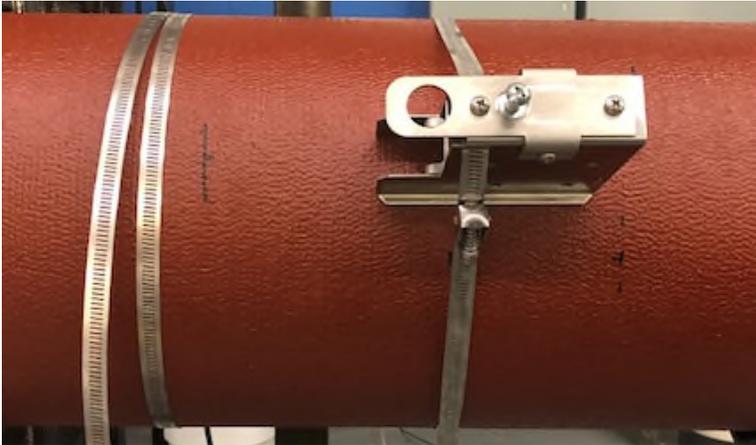

View from back of pipe:

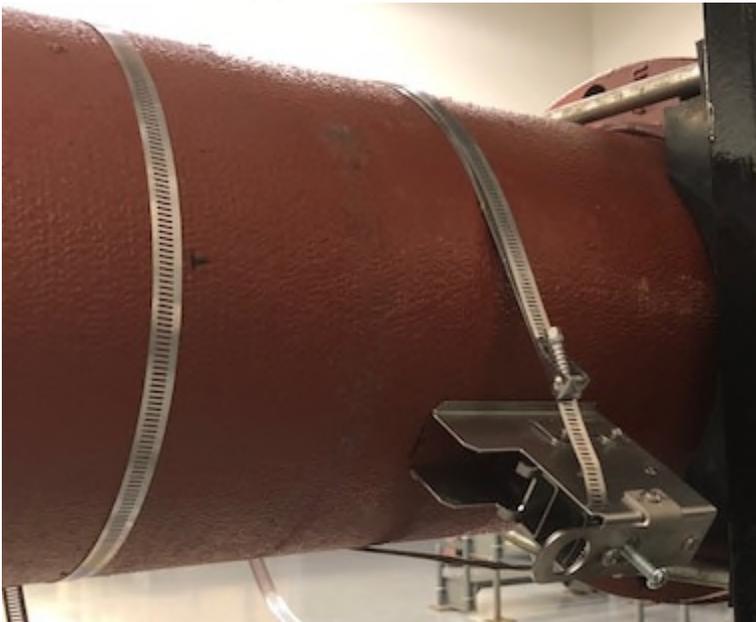


Tips for installing transducers:

- a. Be sure the tightening screws on the brackets are loosened completely.
- b. Put the transducer into the bracket by ensuring the bottom of the transducer and the couplant does not touch the pipe as you slide it in (hover).

**1 CROSS INSTALLATION OVERVIEW – SE16B Transducers TMK-B21 or TMK-B22 Kit (Cont.)**

- c. With the transducer hovering, tighten the screws on the bracket until tight. The transducer will be level with the surface of the pipe, and no grease will have smeared off from inserting the transducer in the bracket.

Proper coupling compound application:

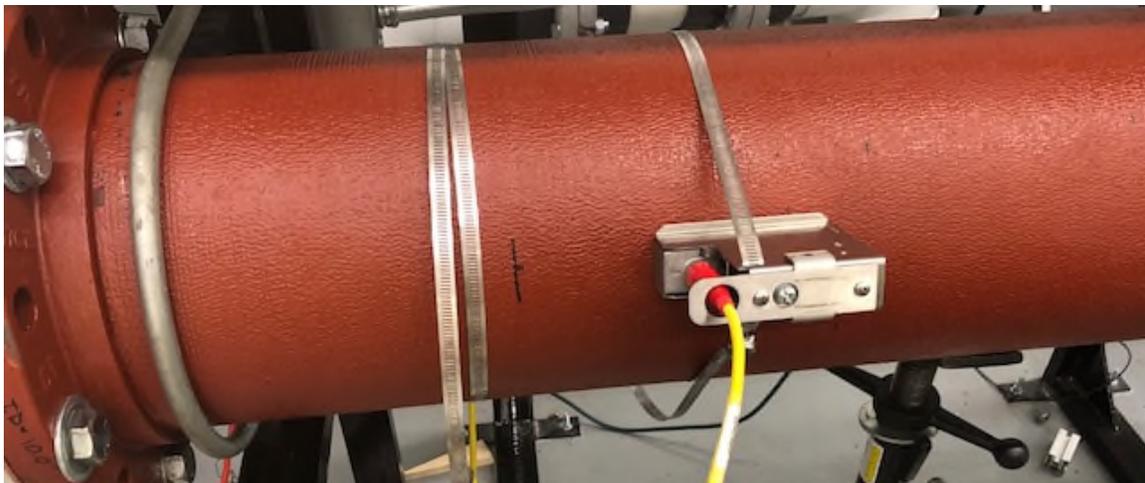

Finished installation:


- 10. If you need to make fine adjustments ( $\pm 0.25''$ ) to the spacing at this point, you may do so by loosening the hose clamps slightly, and sliding the brackets while the transducers are installed inside them. Tighten the hose clamps when done.

### **SEPARATION DISTANCE (Sensor Spacing Distance)**

Separation distance is automatically calculated by the TTFM 6.1 based on parameters entered in the Setup menu. Sens Space is parameter where this distance is given, and it is located in the Setup menu. Document this value for the following transducer installation procedure.


### **2 or 4 CROSS INSTALLATION OVERVIEW – SE16A Transducers TMK-A1 Kit**

1. Prep the pipe per instructions on page 30, and mind the installation location requirements on page 32. Clean the location where the mounting track is to be installed.
2. Install the stainless steel mounting track on the pipe. Place the tightening brackets near the center, as the transducers are inserted from the outside of them.

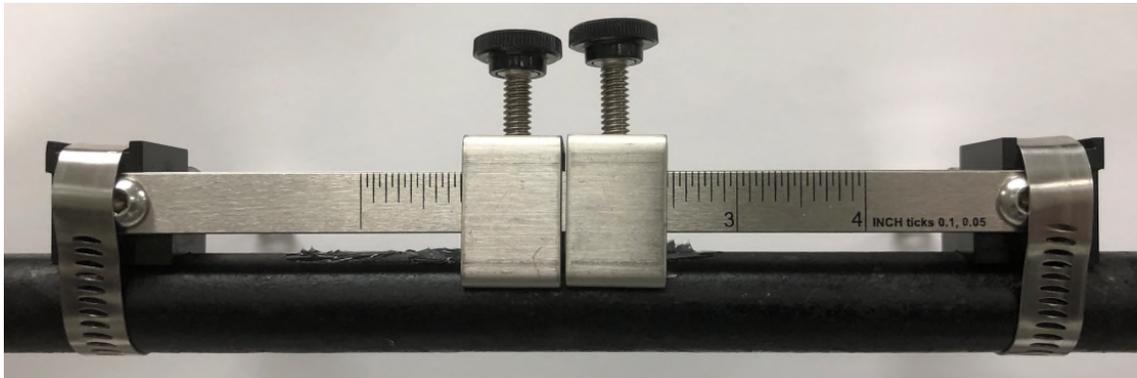


**2 or 4 CROSS INSTALLATION OVERVIEW – SE16A Transducers TMK-A1 Kit (Cont.)**

3. Apply a small amount of coupling compound on the first transducer, and place this transducer in the “reference” position. This is the position where the face of the transducer aligns with the 0 inch or 0 mm mark on the built-in ruler. Tighten this transducer down using the built-in tightening bracket. Do not over-tighten the screw.

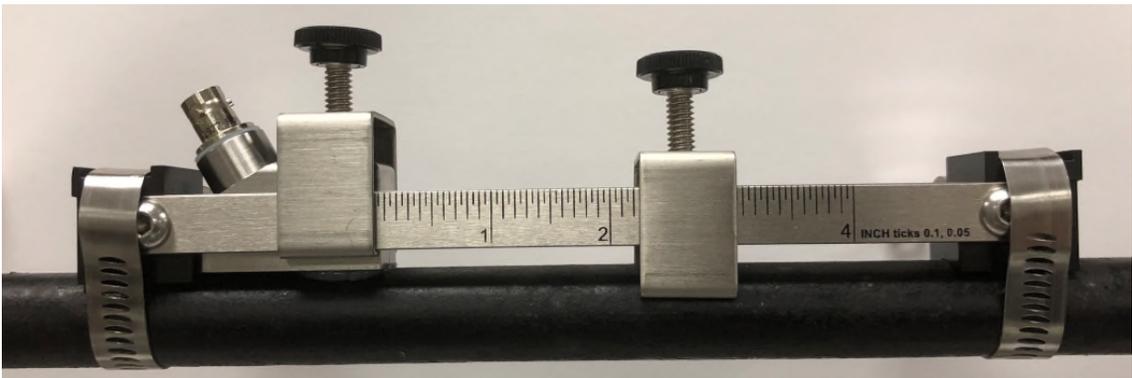

**2 or 4 CROSS INSTALLATION OVERVIEW – SE16A Transducers TMK-A1 Kit (Cont.)**

4. Apply a small amount of coupling compound on the second transducer, and place this transducer at the separation distance provided in the Setup menu of the TTFM. Tighten this transducer down using the built-in tightening bracket. Do not over-tighten the screw.

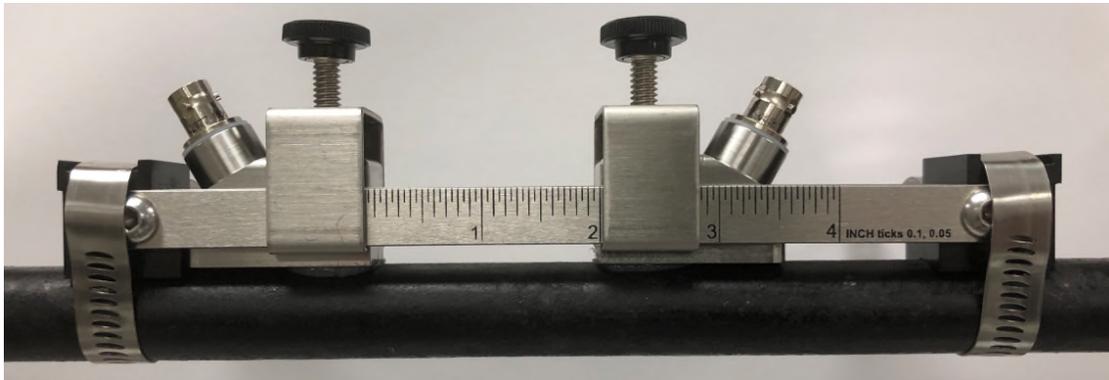

5. If you need to make fine adjustments ( $\pm 0.1$ " ) to the spacing at this point, you may do so by loosening the tightening screw slightly, sliding the second transducer, then re-tightening it.




**SENSOR MOUNTING/COUPLING RECOMMENDATIONS**

**BAD**

Avoid air traveling at the top of a horizontal pipe.








Avoid debris traveling at the bottom of a horizontal pipe.



**GOOD**

Installing between 1 and 5 o'clock, and 7 and 11 o'clock on horizontal pipes is acceptable.



## ENCLOSURE INSTALLATION

Locate the enclosure within 25 ft (7.6 m) of the sensors (up to 100 ft - 30 m optional). The enclosure can be wall mounted with the four mounting screws (included) or panel mounted with Option PM Panel Mount kit from Greyline Instruments.



Avoid mounting the enclosure in direct sunlight to protect the electronics from damage due to overheating and condensate. In high humidity atmospheres, or where temperatures fall below freezing, Option TH Enclosure Heater and Thermostat is recommended. **IMPORTANT:** Seal conduit entries to prevent moisture from entering enclosure.

### NEMA4X (IP66) WITH CLEAR COVER

1. Open hinged enclosure cover.
2. Insert #12 screws (supplied) through the four enclosure mounting holes to secure the enclosure to the wall or mounting stand.

Additional conduit holes can be cut in the bottom of the enclosure when required. Use a hole saw or Greenlee-type hole cutter to cut the required holes.

**IMPORTANT:** DO NOT make conduit/wiring entries into the top or sides of the enclosure.

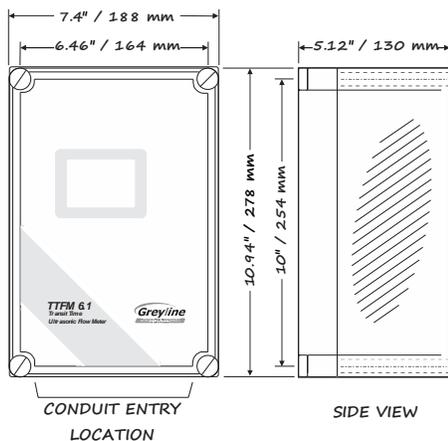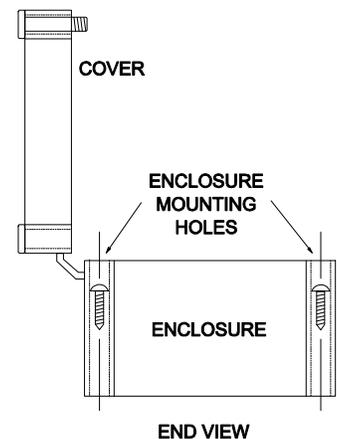

Note: This non-metallic enclosure does not automatically provide grounding between conduit connections. Grounding must be provided as part of the installation. Ground in accordance with the requirements of the National Electrical Code. System grounding is provided by connecting grounding wires from all conduit entries to the steel mounting plate or another point which provides continuity.

### CLEANING

Cleaning is not required as a part of normal maintenance.

**FIELD TROUBLESHOOTING**

| <i>Possible Causes:</i>  | <i>Corrective Action:</i>   |
|--|---|
| <b>METER READING WHEN THERE IS NO FLOW?</b>  |   |
| Erratic measurement (set damping to 0% to check) due to electrical noise or poor signal quality. | <ul style="list-style-type: none"> <li>• Set Calibration/ Damping to 0% with zero flow use Setup / Tare function.</li> <li>• Ensure all Flowmeter wiring is in METAL conduit and sensor shield is properly connected to Ground.</li> <li>• Ensure correct power input Ground connection (&lt;1 ohm resistance).</li> <li>• Ensure 4-20mA Shield connected to Instrument Ground stud.</li> <li>• Adjust Calibration / Min Flow setting.</li> <li>• Contact Greyline for further assistance.</li> </ul> |
| Variable Speed Drive interference  | <ul style="list-style-type: none"> <li>• Follow Drive manufacturers wiring and Grounding instructions</li> <li>• Relocate Flowmeter electronics, Sensor and wiring away from VSD</li> </ul>   |
| <b>METER READING LOWER THAN EXPECTED?</b>  |   |
| Calibration Error  | <ul style="list-style-type: none"> <li>• Review calibration menu. Pipe dimensions and fluid selection/fluid velocity.</li> </ul>  |
| Lower flow rate than expected  | <ul style="list-style-type: none"> <li>• Investigate pump/valves. Compare velocity with alternate instrument.</li> </ul>  |
| Erratic measurement (set damping to 0% to check) due to electrical noise or poor signal quality. | <ul style="list-style-type: none"> <li>• Ensure all Flowmeter wiring is in METAL conduit and sensor shield is properly grounded.</li> <li>• Ensure correct power input Ground connection (&lt;1 ohm resistance).</li> <li>• Ensure 4-20mA Shield connected to Instrument Ground stud.</li> <li>• Contact Greyline for further assistance.</li> </ul>  |
| <b>NO ECHO INDICATION Icon: No Echo</b>  |   |
| Improper Installation  | <ul style="list-style-type: none"> <li>• Check Setup menu to ensure pipe material, size, thickness, liner type, thickness, fluid type, and fluid temperature and configured properly. Check transducer mounting method and spacing matches Setup menu values.</li> </ul>  |
| Sensors not mounted to Pipe or mounted improperly  | <ul style="list-style-type: none"> <li>• Apply coupling compound and mount sensors to pipe with proper sensor spacing.</li> </ul>   |

| <i>Possible Causes:</i>  | <i>Corrective Action:</i>  |
|--|--|
| <i>NO ECHO INDICATION Icon: No Echo (cont.)</i>  |  |
| Empty pipe or partially filled   | <ul style="list-style-type: none"> <li>• Pipe must be fluid filled and acoustically transparent in order to obtain echoes.</li> </ul>  |
| Coupling compound washed out, or sensor loose on pipe.   | <ul style="list-style-type: none"> <li>• Remount sensor</li> <li>• Use Super Lube® Silicone Compound</li> </ul>  |
| <i>SENSOR CONNECTIONS</i>  |  |
| OPEN/SHORT SENSOR ICON   | <ul style="list-style-type: none"> <li>• No sensors attached</li> <li>• Short in transducer, or in triax transducer cable. Follow Sensor Connections steps</li> </ul>  |
| Sensor Connections   | <ul style="list-style-type: none"> <li>• Check sensor connections at TTFM and at sensor junction box.</li> <li>• Note: Refer to Sensor Cable Resistance Test to test final connections.</li> </ul>   |
| <i>METER READING HIGHER THAN EXPECTED?</i>   |  |
| Calibration Error  | <ul style="list-style-type: none"> <li>• Review calibration menu. Pipe dimensions and fluid selection/fluid velocity.</li> </ul>   |
| Higher flow rate than expected   | <ul style="list-style-type: none"> <li>• Investigate pump/valves. Compare velocity with alternate instrument.</li> </ul>   |
| Erratic measurement (set damping to 0% to check) due to electrical noise or poor signal quality. | <ul style="list-style-type: none"> <li>• Ensure all Flowmeter wiring is in METAL conduit and sensor shield is properly grounded.</li> <li>• Ensure correct power input Ground connection (&lt;1 ohm resistance).</li> <li>• Ensure 4-20mA Shield connected to Instrument Ground stud.</li> <li>• Contact Greyline for further assistance.</li> </ul> |
| High viscosity fluid   | <ul style="list-style-type: none"> <li>• Laminar flow profile due to high viscosity fluid requires an adjustment to Cal Const.</li> </ul>  |

### SENSOR CABLE & TRANSDUCER RESISTANCE TEST

Unplug the green sensor terminal from the Transit Time board with the sensor wires still connected and the BNC end of the cable is connected to the transducer. With a multimeter, perform resistance checks for each set of wires. One single loose terminal may cause false readings.

Test across shield and core of each wire: TDR1 and TDR2. Resistance should be around 10K ohms for any cable length. High readings indicate an open circuit and low readings indicate a short or partial short in the sensor cable connections or transducer.

Note: The TTFM 6.1 will automatically detect connectivity to the sensors. Confirm that TTFM 6.1 indicates "Sensor Good" in the messages menu if your resistance measured is approximately 10K Ohms.



## COMMON QUESTIONS AND ANSWERS

*The pipe vibrates. Will it affect the flow meter?*

Common vibration frequencies are far lower than the sonic frequencies used by the Greyline flow meter, and will not normally affect accuracy or performance. However, applications where very weak Transit Time signal is present (when sensitivity is adjusted to maximum and signal strength is low), accuracy may be affected by pipe vibration, or the flow meter may show readings under no-flow conditions. Attempt to relocate the sensor on a pipe section where vibration is reduced, or arrange pipe mounting brackets to reduce vibration at the sensor mounting location.

*The flow meter must be installed in a high noise environment. Will this affect operation?*

Greyline flow meters are designed to discriminate between environmental noise and the Transit Time signal. High noise environments may affect the flow meter's performance where low signal strength and/or low flow velocities are being measured. Relocate the sensor in a quieter environment if possible.

*Will pipe corrosion affect accuracy of the flow meter?*

Yes. Rust, loose paint etc. must be removed from the outside of the pipe to provide a clean mounting position when installing a Transit Time sensor. Severe corrosion/oxidation on the inside of the pipe may prevent the Transit Time signal from penetrating into the flow. If the pipe cannot be cleaned, a spool piece (PVC recommended) should be installed for sensor mounting.

*What effect do pipe liners have on the flow meter?*

The air gap between loose insertion liners and the pipe wall prevent the Transit Time signal from entering the flow. Better results can be expected with bonded liners such as cement, epoxy or tar, however an on site test is recommended to determine if the application is suitable for a Transit Time flow meter.

*Why is Transit Time recommended for clean liquids?*

The Transit Time sensor transmits sound across the flow stream in order to measure the time it takes to arrive at the other sensor, and therefore requires a fluid medium that is relatively transparent to the acoustic signal. The Transit Time system will not function when there is high volume of solids or aeration. As a guideline, Greyline Transit Time flow meters are recommended for clean liquids with solids or bubbles content less than 2% by volume.

*Can the sensor be submerged in water?*

Yes, for short periods of time or by accident, but it is not recommended for continuous operation. The sensor is constructed to withstand submersion to 10 psi (0.7 Bar) without damage provided the protective rubber boot is filled with Super Lube®.

*What is the purpose of the Signal Strength Display?*

The primary function of the signal strength display is to assist as a feedback when mounting sensors. Signal Strength can also be a useful diagnostics tool when troubleshooting problems with an installation. A signal strength less than 100% may indicate a problem with the installation or other issues such as a mis-programmed pipe size, pipe material, fluid type or temperature, or wrong transducer spacing. A signal strength less than 100% may also simply indicate a lot of aeration, or deteriorated pipe. Consideration should be made to use a 1 cross installation in such a case.

*Can I change the length of the sensor cable?*

Yes. The Greyline Transit Time design allow cable lengths up to 100 ft (30 m) or extension up to 250 ft with extra cable and JB2X optional junction box. Replacement cable of different length may be installed in rigid or flexible conduit for mechanical protection. Use only Greyline shielded triaxial cable.

*Does the TTFM 6.1 require periodic recalibration?*

TTFM 6.1 calibration does not drift over time. The solid state sensor has no moving parts to wear and affect calibration. All Greyline timing/counting circuits use crystal-controlled frequency references to eliminate any drift in the processing circuitry.

ISO 9000 or similar quality management systems may require periodic and verifiable recalibration of flow meters. TTFM 6.1 Flow Meters may be returned to Greyline for factory calibration and issue of a new NIST traceable certificate. Refer to the 'Product Return Procedure' section of this manual for return instructions.

## **APPLICATIONS HOTLINE**

For applications assistance, advice or information on any Greyline Instrument contact your Sales Representative, write to Greyline or phone the Applications Hotline below:

|                |                   |                   |
|----------------|-------------------|-------------------|
| United States: | Tel: 315-788-9500 | Fax: 315-764-0419 |
| Canada:        | Tel: 613-938-8956 | Fax: 613-938-4857 |
| Toll Free:     | 888-473-9546      |                   |
| Email:         | info@greyline.com |                   |
| Web Site:      | www.greyline.com  |                   |

Greyline Instruments Inc.

USA  
11451 Belcher Road South  
Largo, FL 33773

Canada  
16456 Sixsmith Drive  
Long Sault, Ont. K0C 1P0

## **PRODUCT RETURN PROCEDURE**

Instruments may be returned to Greyline for service or warranty repair.

### **1 Obtain an RMA Number from Greyline -**

Before shipping a product to the factory please contact Greyline by telephone, fax or email to obtain an RMA number (Returned Merchandise Authorization). This ensures fast service and correct billing or credit.

When you contact Greyline please have the following information available:

1. Model number / Software Version
2. Serial number
3. Date of Purchase
4. Reason for return (description of fault or modification required)
5. Your name, company name, address and phone number

### **2 Clean the Sensor/Product -**

***Important: unclean products will not be serviced and will be returned to the sender at their expense.***

1. Rinse sensor and cable to remove debris.
2. If the sensor has been exposed to sewage, immerse both sensor and cable in a solution of 1 part household bleach (Javex, Clorox etc.) to 20 parts water for 5 minutes. Important: do not immerse open end of sensor cable.
3. Dry with paper towels and pack sensor and cable in a sealed plastic bag.
4. Wipe the outside of the enclosure to remove dirt or deposits.
5. Return to Greyline for service.

## LIMITED WARRANTY

---

Greyline Instruments warrants, to the original purchaser, its products to be free from defects in material and workmanship for a period of one year from date of invoice. Greyline will replace or repair, free of charge, any Greyline product if it has been proven to be defective within the warranty period. This warranty does not cover any expenses incurred in the removal and re-installation of the product.

If a product manufactured by Greyline should prove defective within the first year, return it freight prepaid to Greyline Instruments along with a copy of your invoice.

This warranty does not cover damages due to improper installation or handling, acts of nature, or unauthorized service. Modifications to or tampering with any part shall void this warranty. This warranty does not cover any equipment used in connection with the product or consequential damages due to a defect in the product.


All implied warranties are limited to the duration of this warranty. This is the complete warranty by Greyline and no other warranty is valid against Greyline. Some states do not allow limitations on how long an implied warranty lasts or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Greyline Instruments Inc.

**ENCLOSURE HEATER AND THERMOSTAT - Option TH**

Instruments can be factory-equipped with an Enclosure Heater and Thermostat or the module can be customer-installed. The Thermostat is factory set to turn ON at 40°F (4.5°C) and OFF at 60°F (15.5°C). Power consumption is 15 Watts.

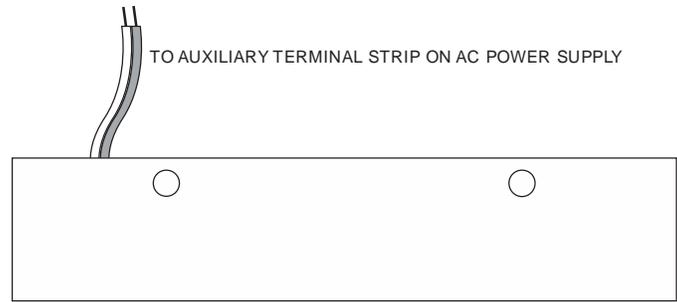

**ENCLOSURE SUNSCREEN - Option SCR**


Do not mount instrument electronics in direct sunlight. Overheating will reduce the life of electronic components and condensate may form during the heat/cool cycles and cause electrical shorts.

**Note:**

Exposure to direct sunlight can cause overheating and moisture condensation which will reduce the operating life of electronics.

Protect Instruments from direct sunlight with this iridite finished aluminum sun screen (Greyline Option SCR).

Seal conduit entries with caulking compound to further reduce moisture condensation.

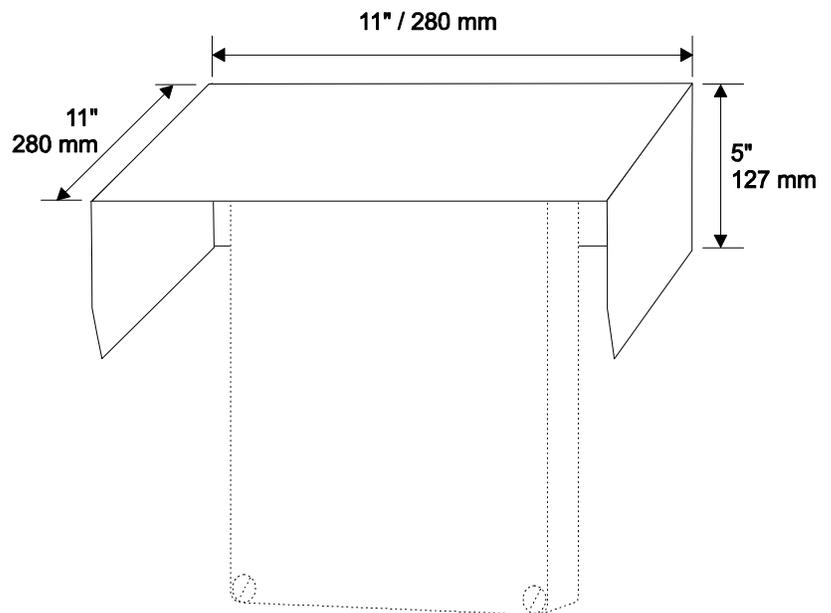


**POWER INPUT OPTION  
9-32VDC**

TTFM 6.1 Flow Meters may be ordered factory-configured for 9-32VDC power input, or a 9-32VDC Power Input card can be installed in the place of the 100-240VAC card in the field.


**CONNECTIONS:**

**POWER INPUT:** Connect 9-32VDC to the + and - terminals. The Power Input GND terminal must be connected to the nearest Ground pole. A 1 amp fuse in line is recommended.

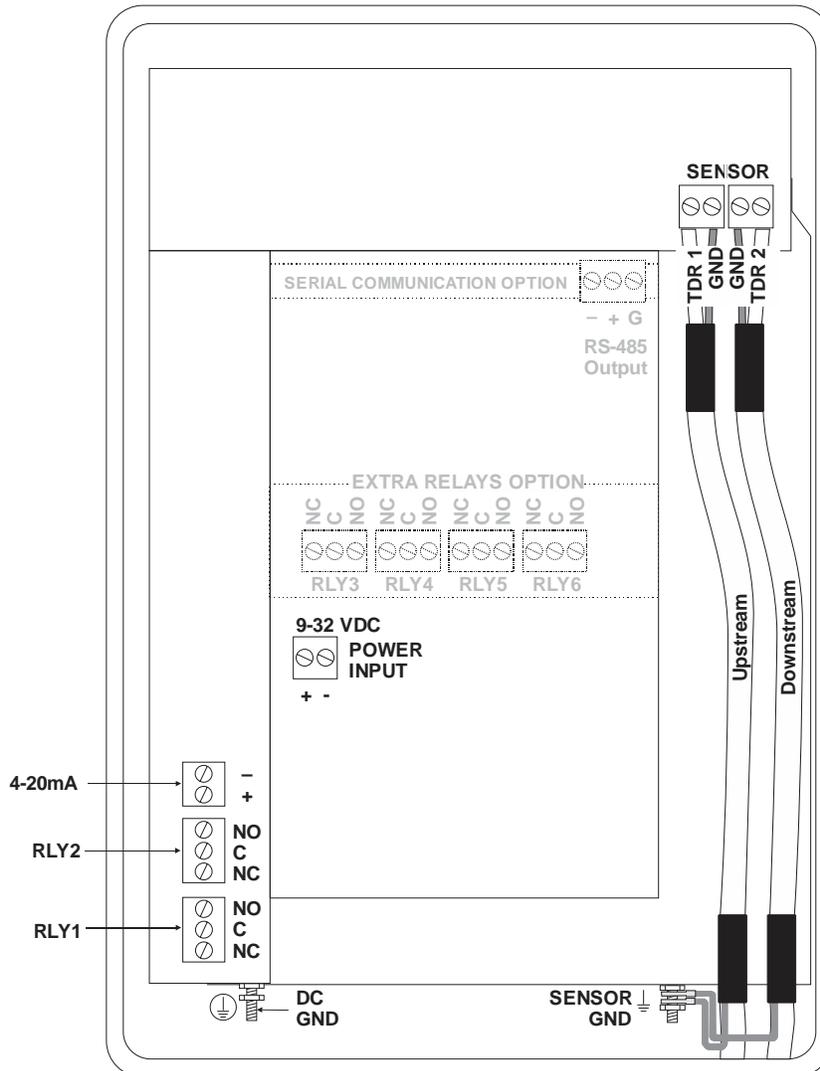


**SPECIFICATIONS**

|                                     |  |
|-------------------------------------|--|
| <b>Flow Rate Range:</b>             | ±0.07 to 40 ft/sec (±0.02 to 12 m/sec)   |
| <b>Pipe Size:</b>                   | ½" to 48" (15 to 1200 mm)  |
| <b>Accuracy:</b>                    | ±1% of flow rate from 1.5 to 40 ft/sec, ±0.015 ft/sec below 1.5 ft/sec.<br>Repeatability and Linearity: ±0.25%                       |
| <b>Displays:</b>                    | White, backlit matrix - displays flow rate, totalizer, relay states, operating mode and calibration menu                             |
| <b>Calibration:</b>                 | built-in 5-key calibrator with English, French or Spanish language selection   |
| <b>Power Input:</b>                 | 100-240VAC, 50/60Hz, 10VA or Optional 9-32VDC, 10 Watts Maximum  |
| <b>Output:</b>                      | Isolated 4-20mA (1000 ohm load max.). Can be changed to 0-5VDC in programming  |
| <b>Data Logger:</b>                 | 128MB Data Storage, 26 million data points   |
| <b>Control Relays:</b>              | Qty 2, rated 5 amp 240VAC SPDT, programmable flow alarm and/or proportional pulse  |
| <b>Enclosure:</b>                   | Watertight, dust tight NEMA4X (IP 66) polycarbonate with a clear shatter-proof face  |
| <b>Environmental Conditions:</b>    | Relative humidity up to 80%, -23 to 60°C ambient temperature, maximum 5000 m altitude, pollution degree 4, Installation Category II. |
| <b>Electrical Surge Protection:</b> | Sensor, 4-20mA output and AC power input   |
| <b>Approximate Shipping Weight:</b> | 12 lbs (5.5 kg)  |

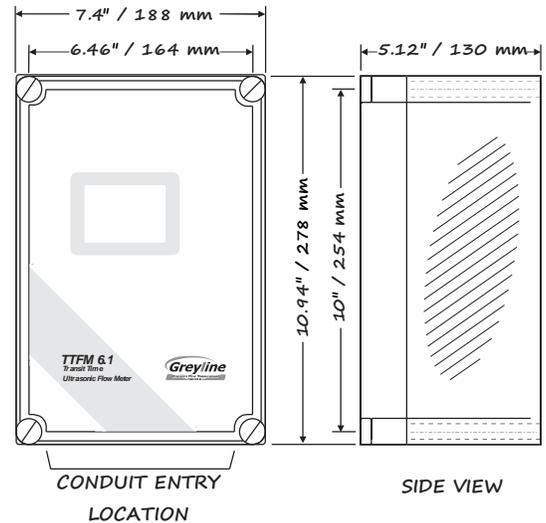


**SE16B Transit Time Sensor**

|                               |   |
|-------------------------------|---|
| <b>Pipe Diameter:</b>         | 2" to 48" (50 to 1200 mm)   |
| <b>Operating Temperature:</b> | -40° to 300°F (-40° to 150°C)   |
| <b>Exposed Materials:</b>     | 316SS   |
| <b>Operating Frequency:</b>   | 1.28 MHz  |
| <b>Sensor Cable:</b>          | 25 ft (7.6 m)<br>Optional 50 ft (15 m) or 100 ft (30 m) available, extendable up to 500 ft (150 m) with JB2X optional junction box. |
| <b>Submersion Rating:</b>     | Withstands accidental submersion pressure up to 10 psi (0.7 Bar) when installed with Super Lube® in sealing rubber boot.            |

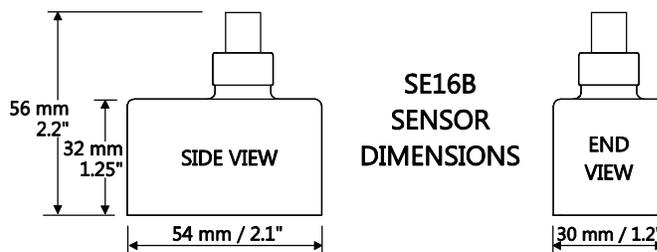


**SE16A Transit Time Sensor**

- Pipe Diameter:** 0.5" To 4" (15 to 100 mm)
- Operating Temperature:** -40° to 300°F (-40° to 150°C)
- Exposed Materials:** 316SS
- Operating Frequency:** 2.56 MHz
- Sensor Cable:** 25 ft (7.6 m)  
 Optional 50 ft (15 m) or 100 ft (30 m) available, extendable up to 500 ft (150 m) with JB2X optional junction box.
- Submersion Rating:** Withstands accidental submersion pressure up to 10 psi (0.7 Bar)

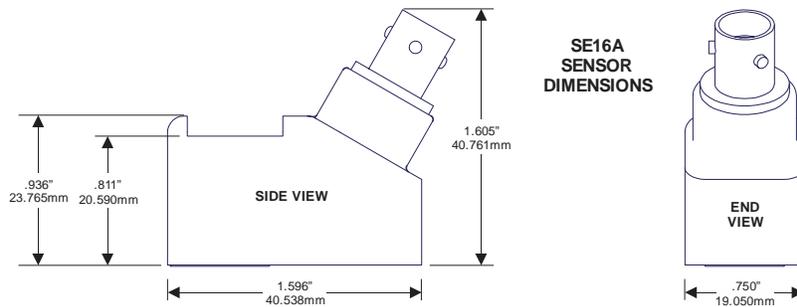

**SE16A Track Mount Dimensions**

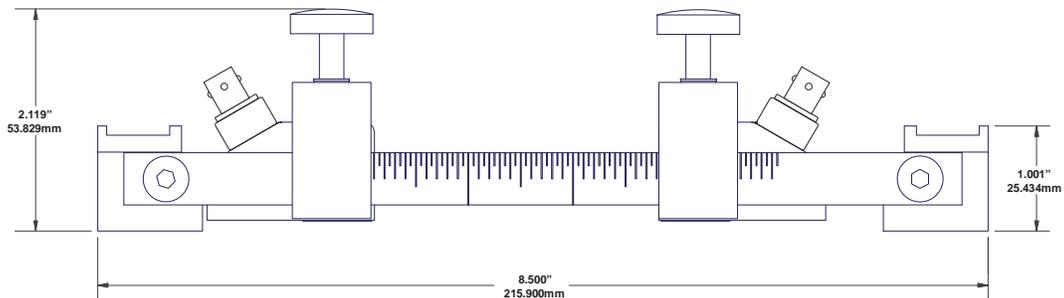

**APPENDIX A - CONVERSION TABLE**

| <b>CONVERSION GUIDE</b> |                    |                                      |
|-------------------------|--------------------|--------------------------------------|
| <b>FROM</b>             | <b>TO</b>          | <b>MULTIPLY BY</b>                   |
| US GALLONS              | CUBIC FEET         | 0.1337                               |
| US GALLONS              | IMPERIAL GALS      | 0.8327                               |
| US GALLONS              | LITRES             | 3.785                                |
| US GALLONS              | CUBIC METERS       | 0.003785                             |
| LITRES/SEC              | GPM                | 15.85                                |
| LITRES                  | CUBIC METERS       | 0.001                                |
| BARRELS (bbl)           | US GALLONS         | 42                                   |
| BARRELS (bbl)           | IMPERIAL GALS      | 34.9726                              |
| BARRELS (bbl)           | LITRES             | 158.9886                             |
| INCHES                  | MM                 | 25.4                                 |
| DEGREES F               | DEGREES C          | $(^{\circ}\text{F}-32) \times 0.556$ |
| POUNDS                  | KILOGRAMS          | 0.453                                |
| PSI                     | BAR                | 0.0676                               |
| FOOT <sup>2</sup>       | METER <sup>2</sup> | 0.0929                               |

Note: BARRELS (bbl) are U.S. oil barrels.

**PIPE CHARTS**

Note: Not all pipe types allowed in programming have charts below. Pipe dimensions will need to be acquired from pipe markings or the pipe manufacturer in such cases.

**Carbon Steel & PVC Pipe**

| Pipe Size | Pipe O.D. | Schedule Standard |       | Extra Heavy |      | Dbl. Extra Heavy |       | Schedule 10 |      | Schedule 20 |      | Schedule 30 |      | Schedule 40 |       | Schedule 80 |       |
|-----------|-----------|-------------------|-------|-------------|------|------------------|-------|-------------|------|-------------|------|-------------|------|-------------|-------|-------------|-------|
|           |           | I.D.              | WALL  | I.D.        | WALL | I.D.             | WALL  | I.D.        | WALL | I.D.        | WALL | I.D.        | WALL | I.D.        | WALL  | I.D.        | WALL  |
| 1/2       | 0.840     | 0.622             | 0.109 |             |      |                  |       |             |      |             |      |             |      | 0.622       | 0.109 | 0.546       | 0.147 |
| 3/4       | 1.050     | 0.824             | 0.113 |             |      |                  |       |             |      |             |      |             |      | 0.824       | 0.113 | 0.742       | 0.154 |
| 1         | 1.315     | 1.049             | 0.133 |             |      |                  |       |             |      |             |      |             |      | 1.049       | 0.133 | 0.957       | 0.175 |
| 1 1/4     | 1.660     | 1.380             | 0.140 |             |      |                  |       |             |      |             |      |             |      | 1.380       | 0.140 | 1.278       | 0.191 |
| 1 1/2     | 1.900     | 1.900             | 0.145 |             |      |                  |       |             |      |             |      |             |      | 1.900       | 0.145 | 1.500       | 0.200 |
| 2         | 2.375     | 2.067             | .154  | 1.939       | .218 | 1.503            | .436  |             |      |             |      |             |      | 2.067       | .154  | 1.939       | 0.218 |
| 2 1/2     | 2.875     | 2.469             | .203  | 2.323       | .276 | 1.771            | .552  |             |      |             |      |             |      | 2.469       | .203  | 2.323       | 0.276 |
| 3         | 3.500     | 3.068             | .216  | 2.900       | .300 | 2.300            | .600  |             |      |             |      |             |      | 3.068       | .216  | 2.900       | 0.300 |
| 3 1/2     | 4.000     | 3.548             | .226  | 3.364       | .318 | 2.728            | .636  |             |      |             |      |             |      | 3.548       | .226  | 3.364       | 0.318 |
| 4         | 4.500     | 4.026             | .237  | 3.826       | .337 | 3.152            | .674  |             |      |             |      |             |      | 4.026       | .237  | 3.826       | 0.337 |
| 5         | 5.563     | 5.047             | .258  | 4.813       | .375 | 4.063            | .750  |             |      |             |      |             |      | 5.047       | .258  | 4.813       | 0.375 |
| 6         | 6.625     | 6.065             | .280  | 5.761       | .432 | 4.897            | .864  |             |      |             |      |             |      | 6.065       | .280  | 5.761       | 0.432 |
| 8         | 8.625     | 7.981             | .322  | 7.625       | .500 | 6.875            | .875  |             |      | 8.125       | .250 | 8.071       | .277 | 7.981       | .322  | 7.625       | 0.500 |
| 10        | 10.750    | 10.020            | .365  | 9.750       | .500 | 8.750            | 1.000 |             |      | 10.250      | .250 | 10.136      | .307 | 10.020      | .365  | 9.564       | 0.593 |
| 12        | 12.750    | 12.000            | .375  | 11.750      | .500 | 10.750           | 1.000 |             |      | 12.250      | .250 | 12.090      | .330 | 11.938      | .406  | 11.376      | 0.687 |
| 14        | 14.000    | 13.250            | .375  | 13.000      | .500 |                  |       | 13.500      | .250 | 13.376      | .312 | 13.250      | .375 | 13.124      | .438  | 12.500      | 0.750 |
| 16        | 16.000    | 15.250            | .375  | 15.000      | .500 |                  |       | 15.500      | .250 | 15.376      | .312 | 15.250      | .375 | 15.000      | .500  | 14.314      | 0.843 |
| 18        | 18.000    | 17.250            | .375  | 17.000      | .500 |                  |       | 17.500      | .250 | 17.376      | .312 | 17.124      | .438 | 16.876      | .562  | 16.126      | 0.937 |
| 20        | 20.000    | 19.250            | .375  | 19.000      | .500 |                  |       | 19.500      | .250 | 19.250      | .375 | 19.000      | .500 | 18.814      | .593  | 17.938      | 1.031 |
| 22        | 22.000    | 21.250            | .375  | 21.000      | .500 |                  |       | 21.500      | .250 | 21.250      | .375 | 21.000      | .500 |             |       |             |       |
| 24        | 24.000    | 23.250            | .375  | 23.000      | .500 |                  |       | 23.500      | .250 | 23.250      | .375 | 22.876      | .562 | 22.626      | .687  | 21.564      | 1.218 |
| 26        | 26.000    | 25.250            | .375  | 25.000      | .500 |                  |       | 25.376      | .312 | 25.000      | .500 |             |      |             |       |             |       |
| 28        | 28.000    | 27.250            | .375  | 27.000      | .500 |                  |       | 27.376      | .312 | 27.000      | .500 | 26.750      | .625 |             |       |             |       |
| 30        | 30.000    | 29.250            | .375  | 29.000      | .500 |                  |       | 29.376      | .312 | 29.000      | .500 | 28.750      | .625 |             |       |             |       |
| 32        | 32.000    | 31.250            | .375  | 31.000      | .500 |                  |       | 31.376      | .312 | 31.000      | .500 | 30.750      | .625 |             |       |             |       |
| 34        | 34.000    | 33.250            | .375  | 33.000      | .500 |                  |       | 33.376      | .312 | 33.000      | .500 | 32.750      | .625 |             |       |             |       |
| 36        | 36.000    | 35.250            | .375  | 35.000      | .500 |                  |       | 35.376      | .312 | 35.000      | .500 | 34.750      | .625 |             |       |             |       |
| 42        | 42.000    | 41.250            | .375  | 41.000      | .500 |                  |       |             |      | 41.000      | .500 | 40.750      | .625 |             |       |             |       |

**Ductile Iron Pipe – Standard Classes**

| Size INCH | OUTSIDE DIA. INCH | Class |       | CEMENT LINING |           |
|-----------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---------------|-----------|
|           |                   | WALL  | I.D.  | **STD         | **DOUBLE  |
|           |                   |       |       |       |       |       |       |       |       |       |       |       |       |       |       | THICKNESS     | THICKNESS |
| 3         | 3.96              |       |       | 0.25  | 3.46  | 0.28  | 3.40  | 0.31  | 3.34  | 0.34  | 3.28  | 0.37  | 3.22  | 0.41  | 3.14  | .125          | .250      |
| 4         | 4.80              |       |       | 0.26  | 4.28  | 0.29  | 4.22  | 0.32  | 4.16  | 0.35  | 4.10  | 0.38  | 4.04  | 0.44  | 3.93  |               |           |
| 6         | 6.90              | 0.25  | 6.40  | 0.28  | 6.34  | 0.31  | 6.28  | 0.34  | 6.22  | 0.37  | 6.16  | 0.40  | 6.10  | 0.43  | 6.04  |               |           |
| 8         | 9.05              | 0.27  | 8.51  | 0.30  | 8.45  | 0.33  | 8.39  | 0.36  | 8.33  | 0.39  | 8.27  | 0.42  | 8.21  | 0.45  | 8.15  |               |           |
| 10        | 11.10             | 0.39  | 10.32 | 0.32  | 10.46 | 0.35  | 10.40 | 0.38  | 10.34 | 0.41  | 10.28 | 0.44  | 10.22 | 0.47  | 10.16 |               |           |
| 12        | 13.20             | 0.31  | 12.58 | 0.34  | 12.52 | 0.37  | 12.46 | 0.40  | 12.40 | 0.43  | 12.34 | 0.46  | 12.28 | 0.49  | 12.22 |               |           |
| 14        | 15.30             | 0.33  | 14.64 | 0.36  | 14.58 | 0.39  | 14.52 | 0.42  | 14.46 | 0.45  | 14.40 | 0.48  | 14.34 | 0.51  | 14.28 |               |           |
| 16        | 17.40             | 0.34  | 16.72 | 0.37  | 16.66 | 0.40  | 16.60 | 0.43  | 16.54 | 0.46  | 16.48 | 0.49  | 16.42 | 0.52  | 16.36 |               |           |
| 18        | 19.50             | 0.35  | 18.80 | 0.38  | 18.74 | 0.41  | 18.68 | 0.44  | 18.62 | 0.47  | 18.56 | 0.50  | 18.50 | 0.53  | 18.44 | .1875         | .375      |
| 20        | 21.60             | 0.36  | 20.88 | 0.39  | 20.82 | 0.42  | 20.76 | 0.45  | 20.70 | 0.48  | 20.64 | 0.51  | 20.58 | 0.54  | 20.52 |               |           |
| 24        | 25.80             | 0.38  | 25.04 | 0.41  | 24.98 | 0.44  | 24.92 | 0.47  | 24.86 | 0.50  | 24.80 | 0.53  | 24.74 | 0.56  | 24.68 |               |           |
| 30        | 32.00             | 0.39  | 31.22 | 0.43  | 31.14 | 0.47  | 31.06 | 0.51  | 30.98 | 0.55  | 30.90 | 0.59  | 30.82 | 0.63  | 30.74 | .250          | .500      |
| 36        | 38.30             | 0.43  | 37.44 | 0.48  | 37.34 | 0.62  | 37.06 | 0.58  | 37.14 | 0.63  | 37.04 | 0.68  | 36.94 | 0.73  | 36.84 |               |           |
| 42        | 44.50             | 0.47  | 43.56 | 0.53  | 43.44 | 0.59  | 43.32 | 0.65  | 43.20 | 0.71  | 43.08 | 0.77  | 42.96 | 0.83  | 42.84 |               |           |
| 48        | 50.80             | 0.51  | 49.78 | 0.58  | 49.64 | 0.65  | 49.50 | 0.72  | 49.36 | 0.79  | 49.22 | 0.86  | 49.08 | 0.93  | 48.94 |               |           |
| 54        | 57.10             | 0.57  | 55.96 | 0.65  | 55.80 | 0.73  | 55.64 | 0.81  | 55.48 | 0.89  | 55.32 | 0.97  | 55.16 | 1.05  | 55.00 |               |           |

\*\*REDUCE I.D. BY DIMENSION SHOWN

**Stainless Steel, Hastelloy "C" & Titanium Pipe**

| Pipe Size | Pipe O.D. | Schedule 5 S (a) |       | Schedule 10 S (a) |       | Schedule 40 S |       | Schedule 80 S |       |
|-----------|-----------|------------------|-------|-------------------|-------|---------------|-------|---------------|-------|
|           |           | I.D.             | WALL  | I.D.              | WALL  | I.D.          | WALL  | I.D.          | WALL  |
| ½         | 0.840     | 0.710            | 0.065 | 0.674             | 0.083 | 0.622         | 0.109 | 0.546         | 0.147 |
| ¾         | 1.050     | 0.920            | 0.065 | 0.884             | 0.083 | 0.824         | 0.113 | 0.742         | 0.154 |
| 1         | 1.315     | 1.185            | 0.065 | 1.097             | 0.109 | 1.049         | 0.133 | 0.957         | 0.175 |
| 1 ¼       | 1.660     | 1.530            | 0.065 | 1.442             | 0.109 | 1.380         | 0.140 | 1.278         | 0.191 |
| 1 ½       | 1.900     | 1.770            | 0.065 | 1.682             | 0.109 | 1.900         | 0.145 | 1.500         | 0.200 |
| 2         | 2.375     | 2.245            | .065  | 2.157             | .109  | 2.067         | .154  | 1.939         | .218  |
| 2 ½       | 2.875     | 2.709            | .083  | 2.635             | .120  | 2.469         | .203  | 2.323         | .276  |
| 3         | 3.500     | 3.334            | .083  | 3.260             | .120  | 3.068         | .216  | 2.900         | .300  |
| 3 ½       | 4.000     | 3.834            | .083  | 3.760             | .120  | 3.548         | .226  | 3.364         | .318  |
| 4         | 4.500     | 4.334            | .083  | 4.260             | .120  | 4.026         | .237  | 3.826         | .337  |
| 5         | 5.563     | 5.345            | .109  | 5.295             | .134  | 5.047         | .258  | 4.813         | .375  |
| 6         | 6.625     | 6.407            | .109  | 6.357             | .134  | 6.065         | .280  | 5.761         | .432  |
| 8         | 8.625     | 8.407            | .109  | 8.329             | .148  | 7.981         | .322  | 7.625         | .500  |
| 10        | 10.750    | 10.482           | .134  | 10.420            | .165  | 10.020        | .365  | 9.750         | .500  |
| 12        | 12.750    | 12.438           | .156  | 12.390            | .180  | 12.000        | .375  | 11.750        | .500  |
| 14        | 14.000    | 13.688           | .156  | 13.624            | .188  |               |       |               |       |
| 16        | 16.000    | 15.670           | .165  | 15.624            | .188  |               |       |               |       |
| 18        | 18.000    | 17.670           | .165  | 17.624            | .188  |               |       |               |       |
| 20        | 20.000    | 19.634           | .188  | 19.564            | .218  |               |       |               |       |
| 22        | 22.000    | 21.624           | .188  | 21.564            | .218  |               |       |               |       |
| 24        | 24.000    | 23.563           | .218  | 23.500            | .250  |               |       |               |       |

| Pipe Size | Pipe O.D. | Schedule 60 |      | Schedule 80 |       | Schedule 100 |       | Schedule 120 |       | Schedule 140 |       | Schedule 160 |       |
|-----------|-----------|-------------|------|-------------|-------|--------------|-------|--------------|-------|--------------|-------|--------------|-------|
|           |           | I.D.        | WALL | I.D.        | WALL  | I.D.         | WALL  | I.D.         | WALL  | I.D.         | WALL  | I.D.         | WALL  |
| 2         | 2.375     |             |      | 1.939       | .218  |              |       |              |       |              |       | 1.689        | .343  |
| 2 ½       | 2.875     |             |      | 2.323       | .276  |              |       |              |       |              |       | 2.125        | .375  |
| 3         | 3.500     |             |      | 2.900       | .300  |              |       |              |       |              |       | 2.624        | .438  |
| 3 ½       | 4.000     |             |      | 3.364       | .318  |              |       |              |       |              |       |              |       |
| 4         | 4.500     |             |      | 3.826       | .337  |              |       | 3.624        | .438  |              |       | 3.438        | .531  |
| 5         | 5.563     |             |      | 4.813       | .375  |              |       | 4.563        | .500  |              |       | 4.313        | .625  |
| 6         | 6.625     |             |      | 5.761       | .432  |              |       | 5.501        | .562  |              |       | 5.189        | .718  |
| 8         | 8.625     | 7.813       | .406 | 7.625       | .500  | 7.439        | .593  | 7.189        | .718  | 7.001        | .812  | 6.813        | .906  |
| 10        | 10.750    | 9.750       | .500 | 9.564       | .593  | 9.314        | .718  | 9.064        | .843  | 8.750        | 1.000 | 8.500        | 1.125 |
| 12        | 12.750    | 11.626      | .562 | 11.376      | .687  | 11.064       | .843  | 10.750       | 1.000 | 10.500       | 1.125 | 10.126       | 1.312 |
| 14        | 14.000    | 12.814      | .593 | 12.500      | .750  | 12.126       | .937  | 11.814       | 1.093 | 11.500       | 1.250 | 11.188       | 1.406 |
| 16        | 16.000    | 14.688      | .656 | 14.314      | .843  | 13.938       | 1.031 | 13.564       | 1.218 | 13.124       | 1.438 | 12.814       | 1.593 |
| 18        | 18.000    | 16.500      | .750 | 16.126      | .937  | 15.688       | 1.156 | 15.250       | 1.375 | 14.876       | 1.562 | 14.438       | 1.781 |
| 20        | 20.000    | 18.376      | .812 | 17.938      | 1.031 | 17.438       | 1.281 | 17.000       | 1.500 | 16.500       | 1.750 | 16.064       | 1.968 |
| 22        | 22.000    | 20.250      | .875 | 19.750      | 1.125 | 19.250       | 1.375 | 18.750       | 1.625 | 18.250       | 1.875 | 17.750       | 2.125 |

**Cast Iron Pipe - ASA Standard**

| Pipe Size | Pipe O.D. | Class 50 |       | Class 100 |       | Class 150 |       | Class 200 |       | Class 250 |       | Class 300 |       | Class 350 |       |
|-----------|-----------|----------|-------|-----------|-------|-----------|-------|-----------|-------|-----------|-------|-----------|-------|-----------|-------|
|           |           | WALL     | I.D.  | WALL      | I.D.  | WALL      | I.D.  | WALL      | I.D.  | WALL      | I.D.  | WALL      | I.D.  | WALL      | I.D.  |
| 3         | 3.96      | 0.32     | 3.32  | 0.32      | 3.32  | 0.32      | 3.32  | 0.32      | 3.32  | 0.32      | 3.32  | 0.32      | 3.32  | 0.32      | 3.32  |
| 4         | 4.80      | 0.35     | 4.10  | 0.35      | 4.10  | 0.35      | 4.10  | 0.35      | 4.10  | 0.35      | 4.10  | 0.35      | 4.10  | 0.35      | 4.10  |
| 6         | 6.90      | 0.38     | 6.14  | 0.38      | 6.14  | 0.38      | 6.14  | 0.38      | 6.14  | 0.38      | 6.14  | 0.38      | 6.14  | 0.38      | 6.14  |
| 8         | 9.05      | 0.41     | 8.23  | 0.41      | 8.23  | 0.41      | 8.23  | 0.41      | 8.23  | 0.41      | 8.23  | 0.41      | 8.23  | 0.41      | 8.23  |
| 10        | 11.10     | 0.44     | 10.22 | 0.44      | 10.22 | 0.44      | 10.22 | 0.44      | 10.22 | 0.44      | 10.22 | 0.48      | 10.14 | 0.52      | 10.06 |
| 12        | 13.20     | 0.48     | 12.24 | 0.48      | 12.24 | 0.48      | 12.24 | 0.48      | 12.24 | 0.52      | 12.16 | 0.52      | 12.16 | 0.56      | 12.08 |
| 14        | 15.30     | 0.48     | 14.34 | 0.51      | 14.28 | 0.51      | 14.28 | 0.55      | 14.20 | 0.59      | 14.12 | 0.59      | 14.12 | 0.64      | 14.02 |
| 16        | 17.40     | 0.54     | 16.32 | 0.54      | 16.32 | 0.54      | 16.32 | 0.58      | 16.24 | 0.63      | 16.14 | 0.68      | 16.04 | 0.68      | 16.04 |
| 18        | 19.50     | 0.54     | 18.42 | 0.58      | 18.34 | 0.58      | 18.34 | 0.63      | 18.24 | 0.68      | 18.14 | 0.73      | 18.04 | 0.79      | 17.92 |
| 20        | 21.60     | 0.57     | 20.46 | 0.62      | 20.36 | 0.62      | 20.36 | 0.67      | 20.26 | 0.72      | 20.16 | 0.78      | 20.04 | 0.84      | 19.92 |
| 24        | 25.80     | 0.63     | 24.54 | 0.68      | 24.44 | 0.73      | 24.34 | 0.79      | 24.22 | 0.79      | 24.22 | 0.85      | 24.10 | 0.92      | 23.96 |

**Cast Iron Pipe - AWWA Standard**

| Pipe Size | Class A<br>100 Ft. 43 PSIG |      |       | Class B<br>200 Ft. 86 PSIG |      |       | Class C<br>300 Ft. 130 PSIG |      |       | Class D<br>400 Ft. 173 PSIG |      |       |
|-----------|----------------------------|------|-------|----------------------------|------|-------|-----------------------------|------|-------|-----------------------------|------|-------|
|           | O.D.                       | WALL | I.D.  | O.D.                       | WALL | I.D.  | O.D.                        | WALL | I.D.  | O.D.                        | WALL | I.D.  |
| 3         | 3.80                       | 0.39 | 3.02  | 3.96                       | 0.42 | 3.12  | 3.96                        | 0.45 | 3.06  | 3.96                        | 0.48 | 3.00  |
| 4         | 4.80                       | 0.42 | 3.96  | 5.00                       | 0.45 | 4.10  | 5.00                        | 0.48 | 4.04  | 5.00                        | 0.52 | 3.96  |
| 6         | 6.90                       | 0.44 | 6.02  | 7.10                       | 0.48 | 6.14  | 7.10                        | 0.51 | 6.08  | 7.10                        | 0.55 | 6.00  |
| 8         | 9.05                       | 0.46 | 8.13  | 9.05                       | 0.51 | 8.03  | 9.30                        | 0.56 | 8.18  | 9.30                        | 0.60 | 8.10  |
| 10        | 11.10                      | 0.50 | 10.10 | 11.10                      | 0.57 | 9.96  | 11.40                       | 0.62 | 10.16 | 11.40                       | 0.68 | 10.04 |
| 12        | 13.20                      | 0.54 | 12.12 | 13.20                      | 0.62 | 11.96 | 13.50                       | 0.68 | 12.14 | 13.50                       | 0.75 | 12.00 |
| 14        | 15.30                      | 0.57 | 14.16 | 15.30                      | 0.66 | 13.98 | 15.65                       | 0.74 | 14.17 | 15.65                       | 0.82 | 14.01 |
| 16        | 17.40                      | 0.60 | 16.20 | 17.40                      | 0.70 | 16.00 | 17.80                       | 0.80 | 16.20 | 17.80                       | 0.89 | 16.02 |
| 18        | 19.50                      | 0.64 | 18.22 | 19.50                      | 0.75 | 18.00 | 19.92                       | 0.87 | 18.18 | 19.92                       | 0.96 | 18.00 |
| 20        | 21.60                      | 0.67 | 20.26 | 21.60                      | 0.80 | 20.00 | 22.06                       | 0.92 | 20.22 | 22.06                       | 1.03 | 20.00 |
| 24        | 25.80                      | 0.76 | 24.28 | 25.80                      | 0.89 | 24.02 | 26.32                       | 1.04 | 24.22 | 26.32                       | 1.16 | 24.00 |
| 30        | 31.74                      | 0.88 | 29.98 | 32.00                      | 1.03 | 29.94 | 32.40                       | 1.20 | 30.00 | 32.74                       | 1.37 | 30.00 |
| 36        | 37.96                      | 0.99 | 35.98 | 38.30                      | 1.15 | 36.00 | 38.70                       | 1.36 | 39.98 | 39.16                       | 1.58 | 36.00 |
| 42        | 44.20                      | 1.10 | 42.00 | 44.50                      | 1.28 | 41.94 | 45.10                       | 1.54 | 42.02 | 45.58                       | 1.78 | 42.02 |
| 48        | 50.50                      | 1.26 | 47.98 | 50.80                      | 1.42 | 47.96 | 51.40                       | 1.71 | 47.98 | 51.98                       | 1.96 | 48.06 |
| 54        | 56.66                      | 1.35 | 53.96 | 57.10                      | 1.55 | 54.00 | 57.80                       | 1.90 | 54.00 | 58.40                       | 2.23 | 53.94 |
| 60        | 62.80                      | 1.39 | 60.02 | 63.40                      | 1.67 | 60.06 | 64.20                       | 2.00 | 60.20 | 64.82                       | 2.38 | 60.06 |
| 72        | 75.34                      | 1.62 | 72.10 | 76.00                      | 1.95 | 72.10 | 76.88                       | 2.39 | 72.10 |                             |      |       |
| 84        | 87.54                      | 1.72 | 84.10 | 88.54                      | 2.22 | 84.10 |                             |      |       |                             |      |       |

| Pipe Size | Class E<br>500 Ft. 217 PSIG |      |       | Class F<br>600 Ft. 260 PSIG |      |       | Class G<br>700 Ft. 304 PSIG |      |       | Class H<br>800 Ft. 347 PSIG |      |       |
|-----------|-----------------------------|------|-------|-----------------------------|------|-------|-----------------------------|------|-------|-----------------------------|------|-------|
|           | O.D.                        | WALL | I.D.  |
| 6         | 7.22                        | 0.58 | 6.06  | 7.22                        | 0.61 | 6.00  | 7.38                        | 0.65 | 6.08  | 7.38                        | 0.69 | 6.00  |
| 8         | 9.42                        | 0.66 | 8.10  | 9.42                        | 0.71 | 8.00  | 9.60                        | 0.75 | 8.10  | 9.60                        | 0.80 | 8.00  |
| 10        | 11.60                       | 0.74 | 10.12 | 11.60                       | 0.80 | 10.00 | 11.84                       | 0.86 | 10.12 | 11.84                       | 0.92 | 10.00 |
| 12        | 13.78                       | 0.82 | 12.14 | 13.78                       | 0.89 | 12.00 | 14.08                       | 0.97 | 12.14 | 14.08                       | 1.04 | 12.00 |
| 14        | 15.98                       | 0.90 | 14.18 | 15.98                       | 0.99 | 14.00 | 16.32                       | 1.07 | 14.18 | 16.32                       | 1.16 | 14.00 |
| 16        | 18.16                       | 0.98 | 16.20 | 18.16                       | 1.08 | 16.00 | 18.54                       | 1.18 | 16.18 | 18.54                       | 1.27 | 16.00 |
| 18        | 20.34                       | 1.07 | 18.20 | 20.34                       | 1.17 | 18.00 | 20.78                       | 1.28 | 18.22 | 20.78                       | 1.39 | 18.00 |
| 20        | 22.54                       | 1.15 | 20.24 | 22.54                       | 1.27 | 20.00 | 23.02                       | 1.39 | 20.24 | 23.02                       | 1.51 | 20.00 |
| 24        | 26.90                       | 1.31 | 24.28 | 26.90                       | 1.45 | 24.00 | 27.76                       | 1.75 | 24.26 | 27.76                       | 1.88 | 24.00 |
| 30        | 33.10                       | 1.55 | 30.00 | 33.46                       | 1.73 | 30.00 |                             |      |       |                             |      |       |
| 36        | 39.60                       | 1.80 | 36.00 | 40.04                       | 2.02 | 36.00 |                             |      |       |                             |      |       |

**Copper Tubing**

| Pipe Size | K      |        |       | L      |        |       | M      |        |       | Copper & Brass Pipe |       |       | Aluminum |       |       |
|-----------|--------|--------|-------|--------|--------|-------|--------|--------|-------|---------------------|-------|-------|----------|-------|-------|
|           | O.D.   | I.D.   | WALL  | O.D.   | I.D.   | WALL  | O.D.   | I.D.   | WALL  | O.D.                | I.D.  | WALL  | O.D.     | I.D.  | WALL  |
| ½"        | 0.625  | 0.527  | 0.049 | 0.625  | 0.545  | 0.040 | 0.625  | 0.569  | 0.028 |                     |       |       |          |       |       |
| ¾"        | 0.875  | 0.745  | 0.065 | 0.875  | 0.785  | 0.045 | 0.875  | 0.811  | 0.032 |                     |       |       |          |       |       |
| 1"        | 1.125  | 0.995  | 0.065 | 1.125  | 1.025  | 0.050 | 1.125  | 1.055  | 0.035 |                     |       |       |          |       |       |
| 1 ¼"      | 1.375  | 1.245  | 0.065 | 1.375  | 1.265  | 0.055 | 1.375  | 1.291  | 0.042 |                     |       |       |          |       |       |
| 1 ½"      | 1.625  | 1.481  | 0.072 | 1.625  | 1.505  | 0.060 | 1.625  | 1.527  | 0.049 |                     |       |       |          |       |       |
| 2"        | 2.125  | 1.959  | 0.083 | 2.125  | 1.985  | 0.070 | 2.125  | 2.009  | 0.058 | 2.375               | 2.062 | 0.157 |          |       |       |
| 2 1/2"    | 2.625  | 2.435  | 0.095 | 2.625  | 2.465  | 0.080 | 2.625  | 2.495  | 0.065 | 2.875               | 2.500 | 0.188 | 2.500    | 2.400 | 0.050 |
| 3"        | 3.125  | 2.907  | 0.109 | 3.125  | 2.945  | 0.090 | 3.125  | 2.981  | 0.072 | 3.500               | 3.062 | 0.219 | 3.000    | 2.900 | 0.050 |
| 3 ½"      | 3.625  | 3.385  | 0.120 | 3.625  | 3.425  | 0.100 | 3.625  | 3.459  | 0.083 | 4.000               | 3.500 | 0.250 |          |       |       |
| 4"        | 4.125  | 3.857  | 0.134 | 4.125  | 3.905  | 0.110 | 4.125  | 3.935  | 0.095 | 4.500               | 3.935 | 0.095 | 4.000    | 4.000 | 0.250 |
| 4 ½"      |        |        |       |        |        |       |        |        |       |                     |       |       | 5.000    | 4.500 | 0.250 |
| 5"        | 5.125  | 4.805  | 0.160 | 5.125  | 4.875  | 0.125 | 5.125  | 4.907  | 0.109 | 5.563               | 5.063 | 0.250 | 5.000    | 4.874 | 0.063 |
| 6"        | 6.125  | 5.741  | 0.192 | 6.125  | 5.845  | 0.140 | 6.125  | 5.881  | 0.122 | 6.625               | 6.125 | 0.250 | 6.000    | 5.874 | 0.063 |
| 7"        |        |        |       |        |        |       |        |        |       | 7.625               | 7.062 | 0.282 | 7.000    | 6.844 | 0.078 |
| 8"        | 8.125  | 7.583  | 0.271 | 8.125  | 7.725  | 0.200 | 8.125  | 7.785  | 0.170 | 8.625               | 8.000 | 0.313 | 8.000    | 7.812 | 0.094 |
| 10"       | 10.125 | 9.449  | 0.338 | 10.125 | 9.625  | 0.250 | 10.125 | 9.701  | 0.212 | 10.000              | 9.812 | 0.094 |          |       |       |
| 12"       | 12.125 | 11.315 | 0.405 | 12.125 | 11.565 | 0.280 | 12.125 | 11.617 | 0.254 |                     |       |       |          |       |       |

**HDPE**

| Pipe Size | OD      | DR 7   |         | DR 7.3 |         | DR 9   |         | DR 11  |         | DR 13.5 |         | DR 15.5 |         |
|-----------|---------|--------|---------|--------|---------|--------|---------|--------|---------|---------|---------|---------|---------|
|           |         | Wall   | ID      | Wall   | ID      | Wall   | ID      | Wall   | ID      | Wall    | ID      | Wall    | ID      |
| 2"        | 2.375"  | 0.339" | 1.656"  | 0.325" | 1.685"  | 0.264" | 1.816"  | 0.216" | 1.917"  | 0.176"  | 2.002"  | 0.153"  | 2.050"  |
| 3"        | 3.500"  | 0.500" | 2.440"  | 0.479" | 2.484"  | 0.389" | 2.676"  | 0.318" | 2.825"  | 0.259"  | 2.950"  | 0.226"  | 3.021"  |
| 4"        | 4.500"  | 0.643" | 3.137"  | 0.616" | 3.193"  | 0.500" | 3.440"  | 0.409" | 3.633"  | 0.333"  | 3.793"  | 0.290"  | 3.885"  |
| 5"        | 5.563"  | 0.795" | 3.878"  | 0.762" | 3.947"  | 0.618" | 4.253"  | 0.506" | 4.491"  | 0.412"  | 4.689"  | 0.347"  | 4.640"  |
| 6"        | 6.625"  | 0.946" | 4.619"  | 0.908" | 4.701"  | 0.736" | 5.064"  | 0.602" | 5.348"  | 0.491"  | 5.585"  | 0.359"  | 4.802"  |
| 7"        | 7.125"  | 1.018" | 4.967"  | 0.976" | 5.056"  | 0.792" | 5.447"  | 0.648" | 5.752"  | 0.528"  | 6.006"  | 0.427"  | 5.719"  |
| 8"        | 8.625"  | 1.232" | 6.013"  | 1.182" | 6.120"  | 0.958" | 6.593"  | 0.784" | 6.963"  | 0.639"  | 7.271"  | 0.460"  | 6.150"  |
| 10"       | 10.750" | 1.536" | 7.494"  | 1.473" | 7.628"  | 1.194" | 8.218"  | 0.977" | 8.678"  | 0.796"  | 9.062"  | 0.556"  | 7.445"  |
| 12"       | 12.750" | 1.821" | 8.889"  | 1.747" | 9.047"  | 1.417" | 9.747"  | 1.159" | 10.293" | 0.944"  | 10.748" | 0.694"  | 9.280"  |
| 14"       | 14.000" | 2.000" | 9.760"  | 1.918" | 9.934"  | 1.556" | 10.702" | 1.273" | 11.302" | 1.037"  | 11.801" | 0.823"  | 11.006" |
| 16"       | 16.00"  | 2.286" | 11.154" | 2.192" | 11.353" | 1.778" | 12.231" | 1.455" | 12.916" | 1.185"  | 13.487" | 0.903"  | 12.085" |
| 18"       | 18.00"  | 2.571" | 12.549" | 2.466" | 12.773" | 2.000" | 13.760" | 1.636" | 14.531" | 1.333"  | 15.173" | 1.032"  | 13.812" |
| 20"       | 20.00"  | 2.857" | 13.943" | 2.740" | 14.192" | 2.222" | 15.289" | 1.818" | 16.145" | 1.481"  | 16.859" | 1.161"  | 15.538" |
| 22"       | 22.00"  | 3.143" | 15.337" | 3.014" | 15.611" | 2.444" | 16.818" | 2.000" | 17.760" | 1.630"  | 18.545" | 1.290"  | 17.265" |
| 24"       | 24.00"  | 3.429" | 16.731" | 3.288" | 17.030" | 2.667" | 18.347" | 2.182" | 19.375" | 1.778"  | 20.231" | 1.419"  | 18.991" |
| 26"       | 26.00"  | --     | --      | 3.562" | 18.449" | 2.889" | 19.876" | 2.364" | 20.989" | 1.926"  | 21.917" | 1.548"  | 20.717" |
| 28"       | 28.00"  | --     | --      | --     | --      | 3.111" | 21.404" | 2.545" | 22.604" | 2.074"  | 23.603" | 1.677"  | 22.444" |
| 30"       | 30.00"  | --     | --      | --     | --      | 3.333" | 22.933" | 2.727" | 24.218" | 2.222"  | 25.289" | 1.806"  | 24.170" |
| 32"       | 32.00"  | --     | --      | --     | --      | 3.556" | 24.462" | 2.909" | 25.833" | 2.370"  | 26.975" | 1.935"  | 25.897" |
| 34"       | 34.00"  | --     | --      | --     | --      | --     | --      | 3.091" | 27.447" | 2.519"  | 28.661" | 2.065"  | 27.623" |
| 36"       | 36.00"  | --     | --      | --     | --      | --     | --      | 3.273" | 29.062" | 2.667"  | 30.347" | 2.194"  | 29.350" |
| 42"       | 42.00"  | --     | --      | --     | --      | --     | --      | --     | --      | 3.111"  | 35.404" | 2.323"  | 31.076" |
| 48"       | 48.00"  | --     | --      | --     | --      | --     | --      | --     | --      | 3.556"  | 40.462" | 2.710"  | 36.255" |

**C900/C905 PVC AWWA Water Distribution Pipe (Blue)**

| Pipe Size | OD    | DR14  |        | DR18  |        | DR-21 |        | DR25  |        |
|-----------|-------|-------|--------|-------|--------|-------|--------|-------|--------|
|           |       | Wall  | ID     | Wall  | ID     | Wall  | ID     | Wall  | ID     |
| 4         | 4.80  | 0.343 | 4.114  | 0.267 | 4.266  |       |        | 0.192 | 4.416  |
| 6         | 6.90  | 0.493 | 5.914  | 0.383 | 6.134  |       |        | 0.276 | 6.348  |
| 8         | 9.05  | 0.646 | 7.758  | 0.503 | 8.044  |       |        | 0.362 | 8.326  |
| 10        | 11.10 | 0.793 | 9.514  | 0.617 | 9.866  |       |        | 0.444 | 10.212 |
| 12        | 13.20 | 0.943 | 11.314 | 0.733 | 11.734 |       |        | 0.528 | 12.144 |
| 14        | 15.30 |       |        | 0.850 | 13.600 | 0.729 | 13.842 | 0.612 | 14.076 |
| 16        | 17.40 |       |        | 0.967 | 15.466 | 0.829 | 15.742 | 0.696 | 16.008 |
| 18        | 19.50 |       |        | 1.083 | 17.334 | 0.929 | 17.642 | 0.780 | 17.94  |
| 20        | 21.60 |       |        | 1.200 | 19.200 | 1.029 | 19.542 | 0.864 | 19.872 |
| 24        | 25.80 |       |        | 1.433 | 22.934 | 1.229 | 23.342 | 1.032 | 23.736 |

**APPENDIX C – Liquid Speed of Sound**

| Substance                     | Form Index                                      | Specific Gravity | Sound Speed<br>m/sec. | v/°C - m/s/°C Δ |
|-------------------------------|---|------------------|-----------------------|-----------------|
| Acetic anhydride (22)         | (CH <sub>3</sub> CO) <sub>2</sub> O             | 1.082 (20°C)     | 1180                  | 2.5             |
| Acetic acid, anhydride (22)   | (CH <sub>3</sub> CO) <sub>2</sub> O             | 1.082 (20°C)     | 1180                  | 2.5             |
| Acetic acid, nitrile          | C <sub>2</sub> H <sub>3</sub> N                 | 0.783            | 1290                  | 4.1             |
| Acetic acid, ethyl ester (33) | C <sub>4</sub> H <sub>8</sub> O <sub>2</sub>    | 0.901            | 1085                  | 4.4             |
| Acetic acid, methyl ester     | C <sub>3</sub> H <sub>6</sub> O <sub>2</sub>    | 0.934            | 1211                  |                 |
| Acetone                       | C <sub>3</sub> H <sub>6</sub> O                 | 0.791            | 1174                  | 4.5             |
| Acetonitrile                  | C <sub>2</sub> H <sub>3</sub> N                 | 0.783            | 1290                  | 4.1             |
| Acetylacetone                 | C <sub>6</sub> H <sub>10</sub> O <sub>2</sub>   | 0.729            | 1399                  | 3.6             |
| Acetylene dichloride          | C <sub>2</sub> H <sub>2</sub> Cl <sub>2</sub>   | 1.26             | 1015                  | 3.8             |
| Acetylene tetrabromide (47)   | C <sub>2</sub> H <sub>2</sub> Br <sub>4</sub>   | 2.966            | 1027                  |                 |
| Acetylene tetrachloride (47)  | C <sub>2</sub> H <sub>2</sub> Cl <sub>4</sub>   | 1.595            | 1147                  |                 |
| Alcohol                       | C <sub>2</sub> H <sub>6</sub> O                 | 0.789            | 1207                  | 4.0             |
| Alkazene-13                   | C <sub>15</sub> H <sub>24</sub>                 | 0.86             | 1317                  | 3.9             |
| Alkazene-25                   | C <sub>10</sub> H <sub>12</sub> Cl <sub>2</sub> | 1.20             | 1307                  | 3.4             |
| 2-Amino-ethanol               | C <sub>2</sub> H <sub>7</sub> NO                | 1.018            | 1724                  | 3.4             |
| 2-Aminotolidine (46)          | C <sub>7</sub> H <sub>9</sub> N                 | 0.999 (20°C)     | 1618                  |                 |
| 4-Aminotolidine (46)          | C <sub>7</sub> H <sub>9</sub> N                 | 0.966 (45°C)     | 1480                  |                 |
| Ammonia (35)                  | NH <sub>3</sub>                                 | 0.771            | 1729                  | 6.68            |
| Amorphous Polyolefin          |   | 0.98             | 962.6                 |                 |
| t-Amyl alcohol                | C <sub>5</sub> H <sub>12</sub> O                | 0.81             | 1204                  |                 |
| Aminobenzene (41)             | C <sub>6</sub> H <sub>5</sub> NO <sub>2</sub>   | 1.022            | 1639                  | 4.0             |
| Aniline (41)                  | C <sub>6</sub> H <sub>5</sub> NO <sub>2</sub>   | 1.022            | 1639                  | 4.0             |
| Argon (45)                    | Ar  | 1.400 (-188°C)   | 853                   |                 |
| Azine                         | C <sub>6</sub> H <sub>5</sub> N                 | 0.982            | 1415                  | 4.1             |
| Benzene (29,40,41)            | C <sub>6</sub> H <sub>6</sub>                   | 0.879            | 1306                  | 4.65            |
| Benzol(29,40,41)              | C <sub>6</sub> H <sub>6</sub>                   | 0.879            | 1306                  | 4.65            |
| Bromine (21)                  | Br <sub>2</sub>                                 | 2.928            | 889                   | 3.0             |
| Bromo-benzene (46)            | C <sub>6</sub> H <sub>5</sub> Br                | 1.522            | 1170                  |                 |
| 1-Bromo-butane (46)           | C <sub>4</sub> H <sub>9</sub> Br                | 1.276 (20°C)     | 1019                  |                 |
| Bromo-ethane (46)             | C <sub>2</sub> H <sub>5</sub> Br                | 1.460 (20°C)     | 900                   |                 |
| Bromoform (46,47)             | CHBr <sub>3</sub>                               | 2.89 (20°C)      | 918                   | 3.1             |
| n-Butane (2)                  | C <sub>4</sub> H <sub>10</sub>                  | 0.601 (0°C)      | 1085                  | 5.8             |
| 2-Butanol                     | C <sub>4</sub> H <sub>10</sub> O                | 0.81             | 1240                  | 3.3             |
| sec-Butylalcohol              | C <sub>4</sub> H <sub>10</sub> O                | 0.81             | 1240                  | 3.3             |
| n-Butyl bromide (46)          | C <sub>4</sub> H <sub>9</sub> Br                | 1.276 (20°C)     | 1019                  |                 |
| n-Butyl chloride (22,46)      | C <sub>4</sub> H <sub>9</sub> Cl                | 0.887            | 1140                  | 4.57            |
| tert Butyl chloride           | C <sub>4</sub> H <sub>9</sub> Cl                | 0.84             | 984                   | 4.2             |
| Butyl oleate                  | C <sub>22</sub> H <sub>42</sub> O <sub>2</sub>  |                  | 1404                  | 3.0             |
| 2,3 Butylene glycol           | C <sub>4</sub> H <sub>10</sub> O <sub>2</sub>   | 1.019            | 1484                  | 1.51            |
| Cadmium (7)                   | Cd  |                  | 2237.7                |                 |
| Carbinol (40,41)              | CH <sub>4</sub> O                               | 0.791 (20°C)     | 1076                  | 2.92            |
| Carbitol                      | C <sub>6</sub> H <sub>14</sub> O <sub>3</sub>   | 0.988            | 1458                  |                 |
| Carbon dioxide (26)           | CO <sub>2</sub>                                 | 1.101 (-37°C)    | 839                   | 7.71            |
| Carbon disulphide             | CS <sub>2</sub>                                 | 1.261 (22°C)     | 1149                  |                 |

| Substance                                  | Form Index  | Specific Gravity | Sound Speed<br>m/sec. | v/°C - m/s/°C Δ |
|--|---|------------------|-----------------------|-----------------|
| Carbon tetrachloride(33,35,47)             | CCl <sub>4</sub>  | 1.595 (20°C)     | 926                   | 2.48            |
| Carbon tetrafluoride (14)                  | CF <sub>4</sub>   | 1.75 (-150°C)    | 875.2                 | 6.61            |
| Cetane (23)                                | C <sub>16</sub> H <sub>34</sub>                               | 0.773 (20°C)     | 1338                  | 3.71            |
| Chloro-benzene                             | C <sub>6</sub> H <sub>5</sub> Cl                              | 1.106            | 1273                  | 3.6             |
| 1-Chloro-butane (22,46)                    | C <sub>4</sub> H <sub>9</sub> Cl                              | 0.887            | 1140                  | 4.57            |
| Chloro-diFluoromethane (3) (Freon 22)      | CHClF <sub>2</sub>  | 1.491 (-69°C)    | 893.9                 | 4.79            |
| Chloroform (47)                            | CHCl <sub>3</sub>   | 1.489            | 979                   | 3.4             |
| 1-Chloro-propane (47)                      | C <sub>3</sub> H <sub>7</sub> Cl                              | 0.892            | 1058                  |                 |
| Chlorotrifluoromethane (5)                 | CClF <sub>3</sub>   |                  | 724                   | 5.26            |
| Cinnamaldehyde                             | C <sub>9</sub> H <sub>8</sub> O                               | 1.112            | 1554                  | 3.2             |
| Cinnamic aldehyde                          | C <sub>9</sub> H <sub>8</sub> O                               | 1.112            | 1554                  | 3.2             |
| Colamine                                   | C <sub>2</sub> H <sub>7</sub> NO                              | 1.018            | 1724                  | 3.4             |
| o-Cresol (46)                              | C <sub>7</sub> H <sub>8</sub> O                               | 1.047 (20°C)     | 1541                  |                 |
| m-Cresol (46)                              | C <sub>7</sub> H <sub>8</sub> O                               | 1.034 (20°C)     | 1500                  |                 |
| Cyanomethane                               | C <sub>2</sub> H <sub>3</sub> N                               | 0.783            | 1290                  | 4.1             |
| Cyclohexane (15)                           | C <sub>6</sub> H <sub>12</sub>                                | 0.779 (20°C)     | 1248                  | 5.41            |
| Cyclohexanol                               | C <sub>6</sub> H <sub>12</sub> O                              | 0.962            | 1454                  | 3.6             |
| Cyclohexanone                              | C <sub>6</sub> H <sub>10</sub> O                              | 0.948            | 1423                  | 4.0             |
| Decane (46)                                | C <sub>10</sub> H <sub>22</sub>                               | 0.730            | 1252                  |                 |
| 1-Decene (27)                              | C <sub>10</sub> H <sub>20</sub>                               | 0.746            | 1235                  | 4.0             |
| n-Decylene (27)                            | C <sub>10</sub> H <sub>20</sub>                               | 0.746            | 1235                  | 4.0             |
| Diacetyl                                   | C <sub>4</sub> H <sub>6</sub> O <sub>2</sub>                  | 0.99             | 1236                  | 4.6             |
| Diamylamine                                | C <sub>10</sub> H <sub>23</sub> N                             |                  | 1256                  | 3.9             |
| 1,2 Dibromo-ethane (47)                    | C <sub>2</sub> H <sub>4</sub> Br <sub>2</sub>                 | 2.18             | 995                   |                 |
| trans-1,2-Dibromoethene(47)                | C <sub>2</sub> H <sub>2</sub> Br <sub>2</sub>                 | 2.231            | 935                   |                 |
| Dibutyl phthalate                          | C <sub>8</sub> H <sub>22</sub> O <sub>4</sub>                 |                  | 1408                  |                 |
| Dichloro-t-butyl alcohol                   | C <sub>4</sub> H <sub>8</sub> Cl <sub>2</sub> O               |                  | 1304                  | 3.8             |
| 2,3 Dichlorodioxane                        | C <sub>2</sub> H <sub>6</sub> Cl <sub>2</sub> O <sub>2</sub>  |                  | 1391                  | 3.7             |
| Dichlorodifluoromethane (3) (Freon 12)     | CCl <sub>2</sub> F <sub>2</sub>                               | 1.516 (-40°C)    | 774.1                 | 4.24            |
| 1,2 Dichloro ethane (47)                   | C <sub>2</sub> H <sub>4</sub> Cl <sub>2</sub>                 | 1.253            | 1193                  |                 |
| cis 1,2-Dichloro-Ethene(3,47)              | C <sub>2</sub> H <sub>2</sub> Cl <sub>2</sub>                 | 1.284            | 1061                  |                 |
| trans 1,2-Dichloro-ethene(3,47)            | C <sub>2</sub> H <sub>2</sub> Cl <sub>2</sub>                 | 1.257            | 1010                  |                 |
| Dichloro-fluoromethane (3) (Freon 21)      | CHCl <sub>2</sub> F   | 1.426 (0°C)      | 891                   | 3.97            |
| 1-2-Dichlorohexafluoro cyclobutane (47)    | C <sub>4</sub> Cl <sub>2</sub> F <sub>6</sub>                 | 1.654            | 669                   |                 |
| 1-3-Dichloro-isobutane                     | C <sub>4</sub> H <sub>8</sub> Cl <sub>2</sub>                 | 1.14             | 1220                  | 3.4             |
| Dichloro methane (3)                       | CH <sub>2</sub> Cl <sub>2</sub>                               | 1.327            | 1070                  | 3.94            |
| 1,1-Dichloro-1,2,2,2 tetra fluoroethane    | CClF <sub>2</sub> -CClF <sub>2</sub>                          | 1.455            | 665.3                 | 3.73            |
| Diethyl ether                              | C <sub>4</sub> H <sub>10</sub> O                              | 0.713            | 985                   | 4.87            |
| Diethylene glycol, monoethyl ether         | C <sub>6</sub> H <sub>14</sub> O <sub>3</sub>                 | 0.988            | 1458                  |                 |
| Diethylenimide oxide                       | C <sub>4</sub> H <sub>9</sub> NO                              | 1.00             | 1442                  | 3.8             |
| 1,2-bis(DiFluoramino) butane (43)          | C <sub>4</sub> H <sub>8</sub> (NF <sub>2</sub> ) <sub>2</sub> | 1.216            | 1000                  |                 |
| 1,2bis(DiFluoramino)- 2-methylpropane (43) | C <sub>4</sub> H <sub>9</sub> (NF <sub>2</sub> ) <sub>2</sub> | 1.213            | 900                   |                 |
| 1,2bis(DiFluoramino) propane (43)          | C <sub>3</sub> H <sub>6</sub> (NF <sub>2</sub> ) <sub>2</sub> | 1.265            | 960                   |                 |
| 2,2bis(DiFluoramino) propane (43)          | C <sub>3</sub> H <sub>6</sub> (NF <sub>2</sub> ) <sub>2</sub> | 1.254            | 890                   |                 |

| Substance                        | Form Index                                    | Specific Gravity | Sound Speed<br>m/sec. | v/°C - m/s/°C Δ |
|----------------------------------|---|------------------|-----------------------|-----------------|
| 2,2-Dihydroxydiethyl ether       | C <sub>4</sub> H <sub>10</sub> O <sub>3</sub> | 1.116            | 1586                  | 2.4             |
| Dihydroxyethane                  | C <sub>2</sub> H <sub>6</sub> O <sub>2</sub>  | 1.113            | 1658                  | 2.1             |
| 1,3-Dimethyl-benzene (46)        | C <sub>8</sub> H <sub>10</sub>                | 0.868 (15°C)     | 1343                  |                 |
| 1,2-1.0Dimethyl-benzene(29,46)   | C <sub>8</sub> H <sub>10</sub>                | 0.897 (20°C)     | 1331.5                | 4.1             |
| 1,4-Dimethyl-benzene (46)        | C <sub>8</sub> H <sub>10</sub>                |                  | 1334                  |                 |
| 2,2-Dimethyl-butane (29,33)      | C <sub>6</sub> H <sub>14</sub>                | 0.649 (20°C)     | 1079                  |                 |
| Dimethyl ketone                  | C <sub>3</sub> H <sub>6</sub> O               | 0.791            | 1174                  | 4.5             |
| Dimethyl pentane (47)            | C <sub>7</sub> H <sub>16</sub>                | 0.674            | 1063                  |                 |
| Dimethyl phthalate               | C <sub>8</sub> H <sub>10</sub> O <sub>4</sub> | 1.2              | 1463                  |                 |
| Diiodo-methane                   | CH <sub>2</sub> I <sub>2</sub>                | 3.235            | 980                   |                 |
| Dioxane                          | C <sub>4</sub> H <sub>8</sub> O <sub>2</sub>  | 1.033            | 1376                  |                 |
| Dodecane (23)                    | C <sub>12</sub> H <sub>26</sub>               | 0.749            | 1279                  | 3.85            |
| 1,2-Ethanediol                   | C <sub>2</sub> H <sub>6</sub> O <sub>2</sub>  | 1.113            | 1658                  | 2.1             |
| Ethanenitrile                    | C <sub>2</sub> H <sub>3</sub> N               | 0.783            | 1290                  |                 |
| Ethanoic anhydride (22)          | (CH <sub>3</sub> CO) <sub>2</sub> O           | 1.082            | 1180                  |                 |
| Ethanol                          | C <sub>2</sub> H <sub>6</sub> O               | 0.789            | 1207                  | 4.0             |
| Ethanol amide                    | C <sub>2</sub> H <sub>7</sub> NO              | 1.018            | 1724                  | 3.4             |
| Ethoxyethane                     | C <sub>4</sub> H <sub>10</sub> O              | 0.713            | 985                   | 4.87            |
| Ethyl acetate (33)               | C <sub>4</sub> H <sub>8</sub> O <sub>2</sub>  | 0.901            | 1085                  | 4.4             |
| Ethyl alcohol                    | C <sub>2</sub> H <sub>6</sub> O               | 0.789            | 1207                  | 4.0             |
| Ethyl benzene (46)               | C <sub>8</sub> H <sub>10</sub>                | 0.867(20°C)      | 1338                  |                 |
| Ethyl bromide (46)               | C <sub>2</sub> H <sub>5</sub> Br              | 1.461 (20°C)     | 900                   |                 |
| Ethyl iodide (46)                | C <sub>2</sub> H <sub>5</sub> I               | 1.950 (20°C)     | 876                   |                 |
| Ether                            | C <sub>4</sub> H <sub>10</sub> O              | 0.713            | 985                   | 4.87            |
| Ethyl ether                      | C <sub>4</sub> H <sub>10</sub> O              | 0.713            | 985                   | 4.87            |
| Ethylene bromide (47)            | C <sub>2</sub> H <sub>4</sub> Br <sub>2</sub> | 2.18             | 995                   |                 |
| Ethylene chloride (47)           | C <sub>2</sub> H <sub>4</sub> Cl <sub>2</sub> | 1.253            | 1193                  |                 |
| Ethylene glycol                  | C <sub>2</sub> H <sub>6</sub> O <sub>2</sub>  | 1.113            | 1658                  | 2.1             |
| 50% Glycol/ 50% H <sub>2</sub> O |   |                  | 1578                  |                 |
| d-Fenochone                      | C <sub>10</sub> H <sub>16</sub> O             | 0.947            | 1320                  |                 |
| d-2-Fenechanone                  | C <sub>10</sub> H <sub>16</sub> O             | 0.947            | 1320                  |                 |
| Fluorine                         | F   | 0.545 (-143°C)   | 403                   | 11.31           |
| Fluoro-benzene (46)              | C <sub>6</sub> H <sub>5</sub> F               | 1.024 (20°C)     | 1189                  |                 |
| Formaldehyde, methyl ester       | C <sub>2</sub> H <sub>4</sub> O <sub>2</sub>  | 0.974            | 1127                  | 4.02            |
| Formamide                        | CH <sub>3</sub> NO                            | 1.134 (20°C)     | 1622                  | 2.2             |
| Formic acid, amide               | CH <sub>3</sub> NO                            | 1.134 (20°C)     | 1622                  |                 |
| Freon R12                        |   |                  | 774                   |                 |
| Furfural                         | C <sub>5</sub> H <sub>4</sub> O <sub>2</sub>  | 1.157            | 1444                  |                 |
| Furfuryl alcohol                 | C <sub>5</sub> H <sub>6</sub> O <sub>2</sub>  | 1.135            | 1450                  | 3.4             |
| Fural                            | C <sub>5</sub> H <sub>4</sub> O <sub>2</sub>  | 1.157            | 1444                  | 3.7             |
| 2-Furaldehyde                    | C <sub>5</sub> H <sub>4</sub> O <sub>2</sub>  | 1.157            | 1444                  | 3.7             |
| 2-Furancarboxaldehyde            | C <sub>5</sub> H <sub>4</sub> O <sub>2</sub>  | 1.157            | 1444                  | 3.7             |
| 2-Furyl-Methanol                 | C <sub>5</sub> H <sub>6</sub> O <sub>2</sub>  | 1.135            | 1450                  | 3.4             |
| Gallium                          | Ga  | 6.095            | 2870 (@30°C)          |                 |

| Substance                      | Form Index                                    | Specific Gravity | Sound Speed<br>m/sec. | v/°C - m/s/°C Δ |
|--------------------------------|---|------------------|-----------------------|-----------------|
| Glycerin                       | C <sub>3</sub> H <sub>8</sub> O <sub>3</sub>  | 1.26             | 1904                  | 2.2             |
| Glycerol                       | C <sub>3</sub> H <sub>8</sub> O <sub>3</sub>  | 1.26             | 1904                  | 2.2             |
| Glycol                         | C <sub>2</sub> H <sub>6</sub> O <sub>2</sub>  | 1.113            | 1658                  | 2.1             |
| Helium (45)                    | He <sub>4</sub>                               | 0.125(-268.8°C)  | 183                   |                 |
| Heptane (22,23)                | C <sub>7</sub> H <sub>16</sub>                | 0.684 (20°C)     | 1131                  | 4.25            |
| n-Heptane (29,33)              | C <sub>7</sub> H <sub>16</sub>                | 0.684 (20°C)     | 1180                  | 4.0             |
| Hexachloro-Cyclopentadiene(47) | C <sub>5</sub> Cl <sub>6</sub>                | 1.7180           | 1150                  |                 |
| Hexadecane (23)                | C <sub>16</sub> H <sub>34</sub>               | 0.773 (20°C)     | 1338                  | 3.71            |
| Hexalin                        | C <sub>6</sub> H <sub>12</sub> O              | 0.962            | 1454                  | 3.6             |
| Hexane (16,22,23)              | C <sub>6</sub> H <sub>14</sub>                | 0.659            | 1112                  | 2.71            |
| n-Hexane (29,33)               | C <sub>6</sub> H <sub>14</sub>                | 0.649 (20°C)     | 1079                  | 4.53            |
| 2,5-Hexanedione                | C <sub>6</sub> H <sub>10</sub> O <sub>2</sub> | 0.729            | 1399                  | 3.6             |
| n-Hexanol                      | C <sub>6</sub> H <sub>14</sub> O              | 0.819            | 1300                  | 3.8             |
| Hexahydrobenzene (15)          | C <sub>6</sub> H <sub>12</sub>                | 0.779            | 1248                  | 5.41            |
| Hexahydrophenol                | C <sub>6</sub> H <sub>12</sub> O              | 0.962            | 1454                  | 3.6             |
| Hexamethylene (15)             | C <sub>6</sub> H <sub>12</sub>                | 0.779            | 1248                  | 5.41            |
| Hydrogen (45)                  | H <sub>2</sub>                                | 0.071 (-256°C)   | 1187                  |                 |
| 2-Hydroxy-toluene (46)         | C <sub>7</sub> H <sub>8</sub> O               | 1.047 (20°C)     | 1541                  |                 |
| 3-Hydroxy-toluene (46)         | C <sub>7</sub> H <sub>8</sub> O               | 1.034 (20°C)     | 1500                  |                 |
| Iodo-benzene (46)              | C <sub>6</sub> H <sub>5</sub> I               | 1.823            | 1114                  |                 |
| Iodo-ethane (46)               | C <sub>2</sub> H <sub>5</sub> I               | 1.950 (20°C)     | 876                   |                 |
| Iodo-methane                   | CH <sub>3</sub> I                             | 2.28 (20°C)      | 978                   |                 |
| Isobutyl acetate (22)          | C <sub>6</sub> H <sub>12</sub> O              |                  | 1180                  | 4.85            |
| Isobutanol                     | C <sub>4</sub> H <sub>10</sub> O              | 0.81 (20°C)      | 1212                  |                 |
| Iso-Butane                     |   |                  | 1219.8                |                 |
| Isopentane (36)                | C <sub>5</sub> H <sub>12</sub>                | 0.62 (20°C)      | 980                   | 4.8             |
| Isopropanol (46)               | C <sub>3</sub> H <sub>8</sub> O               | 0.785 (20°C)     | 1170                  |                 |
| Isopropyl alcohol (46)         | C <sub>3</sub> H <sub>8</sub> O               | 0.785 (20°C)     | 1170                  |                 |
| Kerosene                       |   | 0.81             | 1324                  | 3.6             |
| Ketohexamethylene              | C <sub>6</sub> H <sub>10</sub> O              | 0.948            | 1423                  | 4.0             |
| Lithium fluoride (42)          | LiF   |                  | 2485                  | 1.29            |
| Mercury (45)                   | Hg  | 13.594           | 1449                  |                 |
| Mesityloxide                   | C <sub>6</sub> H <sub>16</sub> O              | 0.85             | 1310                  |                 |
| Methane (25,28,38,39)          | CH <sub>4</sub>                               | 0.162            | 405(-89.15°C)         | 17.5            |
| Methanol (40,41)               | CH <sub>4</sub> O                             | 0.791 (20°C)     | 1076                  | 2.92            |
| Methyl acetate                 | C <sub>3</sub> H <sub>6</sub> O <sub>2</sub>  | 0.934            | 1211                  |                 |
| o-Methylaniline (46)           | C <sub>7</sub> H <sub>9</sub> N               | 0.999 (20°C)     | 1618                  |                 |
| 4-Methylaniline (46)           | C <sub>7</sub> H <sub>9</sub> N               | 0.966 (45°C)     | 1480                  |                 |
| Methyl alcohol (40,44)         | CH <sub>4</sub> O                             | 0.791 (20°C)     | 1076                  | 2.92            |
| Methyl benzene (16,52)         | C <sub>7</sub> H <sub>8</sub>                 | 0.867            | 1328                  | 4.27            |
| 2-Methyl-butane (36)           | C <sub>5</sub> H <sub>12</sub>                | 0.62 (20°C)      | 980                   |                 |
| Methyl carbinol                | C <sub>2</sub> H <sub>6</sub> O               | 0.789            | 1207                  | 4.0             |
| Methyl-chloroform (47)         | C <sub>2</sub> H <sub>3</sub> Cl <sub>3</sub> | 1.33             | 985                   |                 |
| Methyl-cyanide                 | C <sub>2</sub> H <sub>3</sub> N               | 0.783            | 1290                  |                 |

| Substance                    | Form Index                                      | Specific Gravity | Sound Speed<br>m/sec. | v/°C - m/s/°C Δ |
|------------------------------|---|------------------|-----------------------|-----------------|
| 3-Methyl cyclohexanol        | C <sub>7</sub> H <sub>14</sub> O                | 0.92             | 1400                  |                 |
| Methylene chloride (3)       | CH <sub>2</sub> Cl <sub>2</sub>                 | 1.327            | 1070                  | 3.94            |
| Methylene iodide             | CH <sub>2</sub> I <sub>2</sub>                  | 3.235            | 980                   |                 |
| Methyl formate (22)          | C <sub>2</sub> H <sub>4</sub> O <sub>2</sub>    | 0.974 (20°C)     | 1127                  | 4.02            |
| Methyl iodide                | CH <sub>3</sub> I                               | 2.28 (20°C)      | 978                   |                 |
| 2-Methylphenol (46)          | C <sub>7</sub> H <sub>8</sub> O                 | 1.047 (20°C)     | 1541                  |                 |
| 3-Methylphenol (46)          | C <sub>7</sub> H <sub>8</sub> O                 | 1.034 (20°C)     | 1500                  |                 |
| Milk, homogenized            |   |                  | 1548                  |                 |
| Morpholine                   | C <sub>4</sub> H <sub>9</sub> NO                | 1.00             | 1442                  | 3.8             |
| Naphtha                      |   | 0.76             | 1225                  |                 |
| Natural Gas (37)             |   | 0.316 (-103°C)   | 753                   |                 |
| Neon (45)                    | Ne  | 1.207 (-246°C)   | 595                   |                 |
| Nitrobenzene (46)            | C <sub>6</sub> H <sub>5</sub> NO <sub>2</sub>   | 1.204 (20°C)     | 1415                  |                 |
| Nitrogen (45)                | N <sub>2</sub>                                  | 0.808 (-199°C)   | 962                   |                 |
| Nitromethane (43)            | CH <sub>3</sub> NO <sub>2</sub>                 | 1.135            | 1300                  | 4.0             |
| Nonane (23)                  | C <sub>9</sub> H <sub>2</sub> O                 | 0.718 (20°C)     | 1207                  | 4.04            |
| 1-Nonene (27)                | C <sub>9</sub> H <sub>18</sub>                  | 0.736 (20°C)     | 1207                  | 4.0             |
| Octane (23)                  | C <sub>8</sub> H <sub>18</sub>                  | 0.703            | 1172                  | 4.14            |
| n-Octane (29)                | C <sub>8</sub> H <sub>18</sub>                  | 0.704 (20°C)     | 1212.5                | 3.50            |
| 1-Octene (27)                | C <sub>8</sub> H <sub>16</sub>                  | 0.723 (20°C)     | 1175.5                | 4.10            |
| Oil of Camphor Sassafrassy   |   |                  | 1390                  | 3.8             |
| Oil, Car (SAE 20a.30)        | 1.74  |                  | 870                   |                 |
| Oil, Castor                  | C <sub>11</sub> H <sub>10</sub> O <sub>10</sub> | 0.969            | 1477                  | 3.6             |
| Oil, Diesel                  |   | 0.80             | 1250                  |                 |
| Oil, Fuel AA gravity         |   | 0.99             | 1485                  | 3.7             |
| Oil (Lubricating X200)       |   |                  | 1530                  | 5019.9          |
| Oil (Olive)                  |   | 0.912            | 1431                  | 2.75            |
| Oil (Peanut)                 |   | 0.936            | 1458                  |                 |
| Oil (Sperm)                  |   | 0.88             | 1440                  |                 |
| Oil, 6                       |   |                  | 1509                  |                 |
| 2,2-Oxydiethanol             | C <sub>4</sub> H <sub>10</sub> O <sub>3</sub>   | 1.116            | 1586                  | 2.4             |
| Oxygen (45)                  | O <sub>2</sub>                                  | 1.155 (-186°C)   | 952                   |                 |
| Pentachloro-ethane (47)      | C <sub>2</sub> HCl <sub>5</sub>                 | 1.687            | 1082                  |                 |
| Pentalin (47)                | C <sub>2</sub> HCl <sub>5</sub>                 | 1.687            | 1082                  |                 |
| Pentane (36)                 | C <sub>5</sub> H <sub>12</sub>                  | 0.626 (20°C)     | 1020                  |                 |
| n-Pentane (47)               | C <sub>5</sub> H <sub>12</sub>                  | 0.557            | 1006                  |                 |
| Perchlorocyclopentadiene(47) | C <sub>5</sub> Cl <sub>6</sub>                  | 1.718            | 1150                  |                 |
| Perchloro-ethylene (47)      | C <sub>2</sub> Cl <sub>4</sub>                  | 1.632            | 1036                  |                 |
| Perfluoro-1-Hepten (47)      | C <sub>7</sub> F <sub>14</sub>                  | 1.67             | 583                   |                 |
| Perfluoro-n-Hexane (47)      | C <sub>6</sub> F <sub>14</sub>                  | 1.672            | 508                   |                 |
| Phene (29,40,41)             | C <sub>6</sub> H <sub>6</sub>                   | 0.879            | 1306                  | 4.65            |
| β-Phenyl acrolein            | C <sub>9</sub> H <sub>8</sub> O                 | 1.112            | 1554                  | 3.2             |
| Phenylamine (41)             | C <sub>6</sub> H <sub>5</sub> NO <sub>2</sub>   | 1.022            | 1639                  | 4.0             |

| Substance                     | Form Index                                    | Specific Gravity | Sound Speed<br>m/sec. | v/°C - m/s/°C Δ |
|-------------------------------|---|------------------|-----------------------|-----------------|
| Phenyl bromide (46)           | C <sub>6</sub> H <sub>5</sub> Br              | 1.522            | 1170                  |                 |
| Phenyl chloride               | C <sub>6</sub> H <sub>5</sub> Cl              | 1.106            | 1273                  | 3.6             |
| Phenyl iodide (46)            | C <sub>6</sub> H <sub>5</sub> I               | 1.823            | 1114                  |                 |
| Phenyl methane (16,52)        | C <sub>7</sub> H <sub>8</sub>                 | 0.867 (20°C)     | 1328                  | 4.27            |
| 3-Phenyl propenal             | C <sub>9</sub> H <sub>8</sub> O               | 1.112            | 1554                  | 3.2             |
| Phthalardione                 | C <sub>8</sub> H <sub>4</sub> O <sub>3</sub>  |                  | 1125                  |                 |
| Phthalic acid, anhydride      | C <sub>8</sub> H <sub>4</sub> O <sub>3</sub>  |                  | 1125                  |                 |
| Phthalic anhydride            | C <sub>8</sub> H <sub>4</sub> O <sub>3</sub>  |                  | 1125                  |                 |
| Pimelic ketone                | C <sub>6</sub> H <sub>10</sub> O              | 0.948            | 1423                  | 4.0             |
| Plexiglas, Lucite, Acrylic    |   |                  | 2651                  |                 |
| Polyterpene Resin             |   | 0.77             | 1099.8                |                 |
| Potassium bromide (42)        | Kbr   |                  | 1169                  | 0.71            |
| Potassium fluoride (42)       | KF  |                  | 1792                  | 1.03            |
| Potassium iodide (42)         | KI  |                  | 985                   | 0.64            |
| Potassium nitrate (48)        | KNO <sub>3</sub>                              | 1.859 (352°C)    | 1740.1                | 1.1             |
| Propane (2,13)(-45 to -130°C) | C <sub>3</sub> H <sub>8</sub>                 | 0.585 (-45°C)    | 1003                  | 5.7             |
| 1,2,3-Propanetriol            | C <sub>3</sub> H <sub>8</sub> O <sub>3</sub>  | 1.26             | 1904                  | 2.2             |
| 1-Propanol (46)               | C <sub>3</sub> H <sub>8</sub> O               | 0.78 (20°C)      | 1222                  |                 |
| 2-Propanol (46)               | C <sub>3</sub> H <sub>8</sub> O               | 0.785 (20°C)     | 1170                  |                 |
| 2-Propanone                   | C <sub>3</sub> H <sub>6</sub> O               | 0.791            | 1174                  | 4.5             |
| Propene (17,18,35)            | C <sub>3</sub> H <sub>6</sub>                 | 0.563 (-13°C)    | 963                   | 6.32            |
| n-Propyl acetate (22)         | C <sub>5</sub> H <sub>10</sub> O <sub>2</sub> | 1.280 (2°C)      | 4.63                  |                 |
| n-Propyl alcohol              | C <sub>3</sub> H <sub>8</sub> O               | 0.78 (20°C)      | 1222                  |                 |
| Propylchloride (47)           | C <sub>3</sub> H <sub>7</sub> Cl              | 0.892            | 1058                  |                 |
| Propylene (17,18,35)          | C <sub>3</sub> H <sub>6</sub>                 | 0.563 (-13°C)    | 963                   | 6.32            |
| Pyridine                      | C <sub>5</sub> H <sub>5</sub> N               | 0.982            | 1415                  | 4.1             |
| Refrigerant 11 (3,4)          | CCl <sub>3</sub> F                            | 1.49             | 828.3                 | 3.56            |
| Refrigerant 12 (3)            | CCl <sub>2</sub> F <sub>2</sub>               | 1.516 (-40°C)    | 774.1                 | 4.24            |
| Refrigerant 14 (14)           | CF <sub>4</sub>                               | 1.75 (-150°C)    | 875.24                | 6.61            |
| Refrigerant 21 (3)            | CHCl <sub>2</sub> F                           | 1.426 (0°C)      | 891                   | 3.97            |
| Refrigerant 22 (3)            | CHClF <sub>2</sub>                            | 1.491 (-69°C)    | 893.9                 | 4.79            |
| Refrigerant 113 (3)           | CCl <sub>2</sub> F-CClF <sub>2</sub>          | 1.563            | 783.7                 | 3.44            |
| Refrigerant 114 (3)           | CClF <sub>2</sub> -CClF <sub>2</sub>          | 1.455            | 665.3                 | 3.73            |
| Refrigerant 115 (3)           | C <sub>2</sub> ClF <sub>5</sub>               |                  | 656.4                 | 4.42            |
| Refrigerant C318 (3)          | C <sub>4</sub> F <sub>8</sub>                 | 1.62 (-20°C)     | 574                   | 3.88            |
| Selenium (8)                  | Se  |                  | 1072                  | 0.68            |
| Silicone (30 cp)              |   | 0.993            | 990                   |                 |
| Sodium fluoride (42)          | NaF   | 0.877            | 2082                  | 1.32            |
| Sodium nitrate (48)           | NaNO <sub>3</sub>                             | 1.884 (336°C)    | 1763.3                | 0.74            |
| Sodium nitrite (48)           | NaNO <sub>2</sub>                             | 1.805 (292°C)    | 1876.8                |                 |
| Solvesso 3                    |   | 0.877            | 1370                  | 3.7             |
| Spirit of wine                | C <sub>2</sub> H <sub>6</sub> O               | 0.789            | 1207                  | 4.0             |
| Sulphur (7,8,10)              | S   |                  | 1177                  | -1.13           |
| Sulphuric acid (1)            | H <sub>2</sub> SO <sub>4</sub>                | 1.841            | 1257.6                | 1.43            |

| Substance                                    | Form Index  | Specific Gravity | Sound Speed<br>m/sec. | v/°C - m/s/°C Δ |
|--|---|------------------|-----------------------|-----------------|
| Tellurium (7)                                | Te  |                  | 991                   | 0.73            |
| 1,1,2,2-Tetrabromo-ethane(47)                | C <sub>2</sub> H <sub>2</sub> Br <sub>4</sub>                 | 2.966120         | 1027                  |                 |
| 1,1,2,2-Tetrachloro-ethane(67)               | C <sub>2</sub> H <sub>2</sub> Cl <sub>4</sub>                 | 1.595            | 1147                  |                 |
| Tetrachloroethane (46)                       | C <sub>2</sub> H <sub>2</sub> Cl <sub>4</sub>                 | 1.553 (20°C)     | 1170                  |                 |
| Tetrachloro-ethene (47)                      | C <sub>2</sub> Cl <sub>4</sub>                                | 1.632            | 1036                  |                 |
| Tetrachloro-methane (33,47)                  | CCl <sub>4</sub>  | 1.595 (20°C)     | 926                   |                 |
| Tetradecane (46)                             | C <sub>14</sub> H <sub>30</sub>                               | 0.763 (20°C)     | 1331                  |                 |
| Tetraethylene glycol                         | C <sub>8</sub> H <sub>18</sub> O <sub>5</sub>                 | 1.123            | 1586/5203.4           | 3.0             |
| Tetrafluoro-methane (14) (Freon 14)          | CF <sub>4</sub>   | 1.75 (-150°C)    | 875.24                | 6.61            |
| Tetrahydro-1,4-isoxazine                     | C <sub>4</sub> H <sub>9</sub> NO                              |                  | 1442                  | 3.8             |
| Toluene (16,52)                              | C <sub>7</sub> H <sub>8</sub>                                 | 0.867 (20°C)     | 1328                  | 4.27            |
| o-Toluidine (46)                             | C <sub>7</sub> H <sub>9</sub> N                               | 0.999 (20°C)     | 1618                  |                 |
| p-Toluidine (46)                             | C <sub>7</sub> H <sub>9</sub> N                               | 0.966 (45°C)     | 1480                  |                 |
| Toluol                                       | C <sub>7</sub> H <sub>8</sub>                                 | 0.866            | 1308                  | 4.2             |
| Tribromo-methane (46,47)                     | CHBr <sub>3</sub>   | 2.89 (20°C)      | 918                   |                 |
| 1,1,1-Trichloro-ethane (47)                  | C <sub>2</sub> H <sub>3</sub> Cl <sub>3</sub>                 | 1.33             | 985                   |                 |
| Trichloro-ethene (47)                        | C <sub>2</sub> HCl <sub>3</sub>                               | 1.464            | 1028                  |                 |
| Trichloro-fluoromethane (3) (Freon 11)       | CCl <sub>3</sub> F  | 1.49             | 828.3                 | 3.56            |
| Trichloro-methane (47)                       | CHCl <sub>3</sub>   | 1.489            | 979                   | 3.4             |
| 1,1,2-Trichloro-1,2,2-Trifluoro-Ethane       | CCl <sub>2</sub> F-CClF <sub>2</sub>                          | 1.563            | 783.7                 |                 |
| Triethyl-amine (33)                          | C <sub>6</sub> H <sub>15</sub> N                              | 0.726            | 1123                  | 4.47            |
| Triethylene glycol                           | C <sub>6</sub> H <sub>14</sub> O <sub>4</sub>                 | 1.123            | 1608                  | 3.8             |
| 1,1,1-Trifluoro-2-Chloro-2-Bromo-Ethane      | C <sub>2</sub> HClBrF <sub>3</sub>                            | 1.869            | 693                   |                 |
| 1,2,2-Trifluorotrichloro- ethane (Freon 113) | CCl <sub>2</sub> F-CClF <sub>2</sub>                          | 1.563            | 783.7                 | 3.44            |
| d-1,3,3-Trimethylnor- camphor                | C <sub>10</sub> H <sub>16</sub> O                             | 0.947            | 1320                  |                 |
| Trinitrotoluene (43)                         | C <sub>7</sub> H <sub>5</sub> (NO <sub>2</sub> ) <sub>3</sub> | 1.64             | 1610                  |                 |
| Turpentine                                   |   | 0.88             | 1255                  |                 |
| Unisis 800                                   |   | 0.87             | 1346                  |                 |
| Water, distilled (49,50)                     | H <sub>2</sub> O  | 0.996            | 1498                  | -2.4            |
| Water, heavy                                 | D <sup>2</sup> O  |                  | 1400                  |                 |
| Water, sea                                   |   | 1.025            | 1531                  | -2.4            |
| Wood Alcohol (40,41)                         | CH <sub>4</sub> O   | 0.791 (20°C)     | 1076                  | 2.92            |
| Xenon (45)                                   | Xe  |                  | 630                   |                 |
| m-Xylene (46)                                | C <sub>8</sub> H <sub>10</sub>                                | 0.868 (15°C)     | 1343                  |                 |
| o-Xylene (29,46)                             | C <sub>8</sub> H <sub>10</sub>                                | 0.897 (20°C)     | 1331.5                | 4.1             |
| p-Xylene (46)                                | C <sub>8</sub> H <sub>10</sub>                                |                  | 1334                  |                 |
| Xylene hexafluoride                          | C <sub>8</sub> H <sub>4</sub> F <sub>6</sub>                  | 1.37             | 879                   |                 |
| Zinc (7)                                     | Zn  |                  | 3298                  |                 |

**Appendix D**

| Sonic Velocity Relative to Temperature of Pure Water |         |               |         |         |               |         |         |               |
|--|---------|---------------|---------|---------|---------------|---------|---------|---------------|
| Temp °F  | Temp °C | Velocity ft/s | Temp °F | Temp °C | Velocity ft/s | Temp °F | Temp °C | Velocity ft/s |
| 0.0  | -17.8   | 4240          | 100.0   | 37.8    | 5003          | 200.0   | 93.3    | 5080          |
| 2.0  | -16.7   | 4267          | 102.0   | 38.9    | 5010          | 202.0   | 94.4    | 5077          |
| 4.0  | -15.6   | 4293          | 104.0   | 40.0    | 5016          | 204.0   | 95.6    | 5075          |
| 6.0  | -14.4   | 4319          | 106.0   | 41.1    | 5022          | 206.0   | 96.7    | 5077          |
| 8.0  | -13.3   | 4344          | 108.0   | 42.2    | 5028          | 208.0   | 97.8    | 5069          |
| 10.0   | -12.2   | 4368          | 110.0   | 43.3    | 5033          | 210.0   | 98.9    | 5066          |
| 12.0   | -11.0   | 4392          | 112.0   | 44.4    | 5038          | 212.0   | 100.0   | 5063          |
| 14.0   | -10.0   | 4416          | 114.0   | 45.6    | 5043          | 214.0   | 101.1   | 5059          |
| 16.0   | -8.9    | 4438          | 116.0   | 46.7    | 5048          | 216.0   | 102.2   | 5056          |
| 18.0   | -7.8    | 4460          | 118.0   | 47.8    | 5052          | 218.0   | 103.3   | 5052          |
| 20.0   | -6.7    | 4482          | 120.0   | 48.9    | 5057          | 220.0   | 104.4   | 5049          |
| 22.0   | -5.6    | 4503          | 122.0   | 50.0    | 5061          | 222.0   | 105.6   | 5045          |
| 24.0   | -4.4    | 4524          | 124.0   | 51.1    | 5065          | 224.0   | 106.7   | 5041          |
| 26.8   | -3.3    | 4544          | 126.0   | 52.2    | 5068          | 226.0   | 107.8   | 5037          |
| 28.0   | -2.2    | 4563          | 128.0   | 53.3    | 5072          | 228.0   | 108.9   | 5033          |
| 30.0   | -1.1    | 4582          | 130.0   | 54.4    | 5075          | 230.0   | 110.0   | 5029          |
| 32.0   | 0.0     | 4601          | 132.0   | 55.6    | 5078          | 232.0   | 111.1   | 5024          |
| 34.0   | 1.1     | 4619          | 134.0   | 56.7    | 5081          | 234.0   | 112.2   | 5020          |
| 36.0   | 2.2     | 4637          | 136.0   | 57.8    | 5084          | 236.0   | 113.3   | 5015          |
| 38.0   | 3.3     | 4654          | 138.0   | 58.9    | 5086          | 238.0   | 114.4   | 5011          |
| 40.0   | 4.4     | 4671          | 140.0   | 60.0    | 5089          | 240.0   | 115.6   | 5006          |
| 42.0   | 5.6     | 4687          | 142.0   | 61.1    | 5091          | 242.0   | 116.7   | 5001          |
| 44.0   | 6.7     | 4703          | 144.0   | 62.2    | 5093          | 244.0   | 117.8   | 4996          |
| 46.0   | 7.8     | 4719          | 146.0   | 63.3    | 5094          | 246.0   | 118.9   | 4991          |
| 48.0   | 8.9     | 4734          | 148.0   | 64.4    | 5096          | 248.0   | 120.0   | 4986          |
| 50.0   | 10.0    | 4748          | 150.0   | 65.6    | 5097          | 250.0   | 121.1   | 4981          |
| 52.0   | 11.1    | 4763          | 152.0   | 66.7    | 5098          | 260.0   | 126.7   | 4944          |
| 54.0   | 12.2    | 4776          | 154.0   | 67.8    | 5099          | 270.0   | 132.2   | 4911          |
| 56.0   | 13.3    | 4790          | 156.0   | 68.9    | 5100          | 280.0   | 137.8   | 4879          |
| 58.0   | 14.4    | 4803          | 158.0   | 70.0    | 5101          | 290.0   | 143.3   | 4843          |
| 60.0   | 15.56   | 4816          | 160.0   | 71.1    | 5102          | 300.0   | 148.9   | 4806          |
| 62.0   | 16.7    | 4828          | 162.0   | 72.2    | 5102          | 310.0   | 154.4   | 4767          |
| 64.0   | 17.9    | 4840          | 164.0   | 73.3    | 5102          | 320.0   | 160.0   | 4724          |
| 66.0   | 18.9    | 4852          | 166.0   | 74.4    | 5102          | 330.0   | 165.6   | 4678          |
| 68.0   | 20.0    | 4863          | 168.0   | 75.6    | 5102          | 340.0   | 171.1   | 4633          |
| 70.0   | 21.1    | 4874          | 170.0   | 76.7    | 5102          | 350.0   | 176.7   | 4587          |
| 72.0   | 22.2    | 4885          | 172.0   | 77.8    | 5101          | 360.0   | 182.2   | 4537          |
| 74.0   | 23.3    | 4895          | 174.0   | 78.9    | 5101          | 370.0   | 187.8   | 4488          |
| 76.0   | 24.4    | 4905          | 176.0   | 80.0    | 5100          | 380.0   | 193.3   | 4439          |
| 78.0   | 25.6    | 4915          | 178.0   | 81.1    | 5099          | 390.0   | 198.9   | 4386          |
| 80.0   | 26.7    | 4925          | 180.0   | 82.2    | 5098          | 400.0   | 204.4   | 4331          |
| 82.0   | 27.8    | 4934          | 182.0   | 83.3    | 5097          | 410.0   | 210.0   | 4272          |
| 84.0   | 28.9    | 4943          | 184.0   | 84.4    | 5096          | 420.0   | 215.6   | 4209          |
| 86.0   | 30.0    | 4951          | 186.0   | 85.6    | 5094          | 430.0   | 221.1   | 4147          |
| 88.0   | 31.1    | 4959          | 188.0   | 86.7    | 5093          | 440.0   | 226.7   | 4081          |
| 90.0   | 32.2    | 4967          | 190.0   | 87.8    | 5091          | 450.0   | 232.2   | 4003          |
| 92.0   | 33.3    | 4975          | 192.0   | 88.9    | 5089          | 460.0   | 237.8   | 3937          |
| 94.0   | 34.4    | 4983          | 194.0   | 90.0    | 5087          | 470.0   | 243.3   | 3871          |
| 96.0   | 35.6    | 4990          | 196.0   | 91.1    | 5085          | 480.0   | 248.9   | 3806          |
| 98.0   | 36.7    | 4997          | 198.0   | 92.2    | 5082          | 490.0   | 254.4   | 3740          |

| Sonic Velocity Relative to Temperature of Pure Water |         |              |         |         |              |         |         |              |
|--|---------|--------------|---------|---------|--------------|---------|---------|--------------|
| Temp °F  | Temp °C | Velocity m/s | Temp °F | Temp °C | Velocity m/s | Temp °F | Temp °C | Velocity m/s |
| 0.0  | -17.8   | 1292.45      | 100.0   | 37.8    | 1525.03      | 200.0   | 93.3    | 1548.38      |
| 2.0  | -16.7   | 1300.64      | 102.0   | 38.9    | 1526.99      | 202.0   | 94.4    | 1547.60      |
| 4.0  | -15.6   | 1308.63      | 104.0   | 40.0    | 1528.86      | 204.0   | 95.6    | 1546.78      |
| 6.0  | -14.4   | 1316.44      | 106.0   | 41.1    | 1530.67      | 206.0   | 96.7    | 1547.60      |
| 8.0  | -13.3   | 1324.06      | 108.0   | 42.2    | 1532.4       | 208.0   | 97.8    | 1545.02      |
| 10.0   | -12.2   | 1331.50      | 110.0   | 43.3    | 1534.06      | 210.0   | 98.9    | 1544.08      |
| 12.0   | -11.0   | 1338.77      | 112.0   | 44.4    | 1535.64      | 212.0   | 100.0   | 1543.11      |
| 14.0   | -10.0   | 1345.86      | 114.0   | 45.6    | 1537.16      | 214.0   | 101.1   | 1542.10      |
| 16.0   | -8.9    | 1352.78      | 116.0   | 46.7    | 1538.61      | 216.0   | 102.2   | 1541.05      |
| 18.0   | -7.8    | 1359.53      | 118.0   | 47.8    | 1539.99      | 218.0   | 103.3   | 1539.97      |
| 20.0   | -6.7    | 1366.12      | 120.0   | 48.9    | 1541.30      | 220.0   | 104.4   | 1538.85      |
| 22.0   | -5.6    | 1372.55      | 122.0   | 50.0    | 1542.55      | 222.0   | 105.6   | 1537.70      |
| 24.0   | -4.4    | 1378.82      | 124.0   | 51.1    | 1543.74      | 224.0   | 106.7   | 1536.51      |
| 26.8   | -3.3    | 1384.94      | 126.0   | 52.2    | 1544.86      | 226.0   | 107.8   | 1535.29      |
| 28.0   | -2.2    | 1390.90      | 128.0   | 53.3    | 1545.91      | 228.0   | 108.9   | 1534.03      |
| 30.0   | -1.1    | 1396.72      | 130.0   | 54.4    | 1546.91      | 230.0   | 110.0   | 1532.74      |
| 32.0   | 0.0     | 1402.39      | 132.0   | 55.6    | 1547.84      | 232.0   | 111.1   | 1531.42      |
| 34.0   | 1.1     | 1407.91      | 134.0   | 56.7    | 1548.72      | 234.0   | 112.2   | 1530.06      |
| 36.0   | 2.2     | 1413.30      | 136.0   | 57.8    | 1549.53      | 236.0   | 113.3   | 1528.67      |
| 38.0   | 3.3     | 1418.55      | 138.0   | 58.9    | 1550.29      | 238.0   | 114.4   | 1527.26      |
| 40.0   | 4.4     | 1423.66      | 140.0   | 60.0    | 1550.99      | 240.0   | 115.6   | 1525.81      |
| 42.0   | 5.6     | 1428.64      | 142.0   | 61.1    | 1551.63      | 242.0   | 116.7   | 1524.33      |
| 44.0   | 6.7     | 1433.48      | 144.0   | 62.2    | 1552.21      | 244.0   | 117.8   | 1522.83      |
| 46.0   | 7.8     | 1438.20      | 146.0   | 63.3    | 1552.74      | 246.0   | 118.9   | 1521.29      |
| 48.0   | 8.9     | 1442.80      | 148.0   | 64.4    | 1553.22      | 248.0   | 120.0   | 1519.73      |
| 50.0   | 10.0    | 1447.27      | 150.0   | 65.6    | 1553.64      | 250.0   | 121.1   | 1518.14      |
| 52.0   | 11.1    | 1451.62      | 152.0   | 66.7    | 1554.01      | 260.0   | 126.7   | 1507.00      |
| 54.0   | 12.2    | 1455.85      | 154.0   | 67.8    | 1554.32      | 270.0   | 132.2   | 1497.00      |
| 56.0   | 13.3    | 1459.97      | 156.0   | 68.9    | 1554.59      | 280.0   | 137.8   | 1487.00      |
| 58.0   | 14.4    | 1463.97      | 158.0   | 70.0    | 1554.80      | 290.0   | 143.3   | 1476.00      |
| 60.0   | 15.56   | 1467.86      | 160.0   | 71.1    | 1554.98      | 300.0   | 148.9   | 1465.00      |
| 62.0   | 16.7    | 1471.64      | 162.0   | 72.2    | 1555.07      | 310.0   | 154.4   | 1453.00      |
| 64.0   | 17.9    | 1475.31      | 164.0   | 73.3    | 1555.13      | 320.0   | 160.0   | 1440.00      |
| 66.0   | 18.9    | 1478.88      | 166.0   | 74.4    | 1555.15      | 330.0   | 165.6   | 1426.00      |
| 68.0   | 20.0    | 1482.34      | 168.0   | 75.6    | 1555.11      | 340.0   | 171.1   | 1412.00      |
| 70.0   | 21.1    | 1485.70      | 170.0   | 76.7    | 1555.03      | 350.0   | 176.7   | 1398.00      |
| 72.0   | 22.2    | 1488.96      | 172.0   | 77.8    | 1554.90      | 360.0   | 182.2   | 1383.00      |
| 74.0   | 23.3    | 1492.13      | 174.0   | 78.9    | 1554.72      | 370.0   | 187.8   | 1368.00      |
| 76.0   | 24.4    | 1495.19      | 176.0   | 80.0    | 1554.49      | 380.0   | 193.3   | 1353.00      |
| 78.0   | 25.6    | 1498.16      | 178.0   | 81.1    | 1554.22      | 390.0   | 198.9   | 1337.00      |
| 80.0   | 26.7    | 1501.04      | 180.0   | 82.2    | 1553.91      | 400.0   | 204.4   | 1320.00      |
| 82.0   | 27.8    | 1503.82      | 182.0   | 83.3    | 1553.55      | 410.0   | 210.0   | 1302.00      |
| 84.0   | 28.9    | 1506.52      | 184.0   | 84.4    | 1553.14      | 420.0   | 215.6   | 1283.00      |
| 86.0   | 30.0    | 1509.13      | 186.0   | 85.6    | 1552.70      | 430.0   | 221.1   | 1264.00      |
| 88.0   | 31.1    | 1511.65      | 188.0   | 86.7    | 1552.21      | 440.0   | 226.7   | 1244.00      |
| 90.0   | 32.2    | 1514.08      | 190.0   | 87.8    | 1551.67      | 450.0   | 232.2   | 1220.00      |
| 92.0   | 33.3    | 1516.44      | 192.0   | 88.9    | 1551.10      | 460.0   | 237.8   | 1200.00      |
| 94.0   | 34.4    | 1518.70      | 194.0   | 90.0    | 1550.48      | 470.0   | 243.3   | 1180.00      |
| 96.0   | 35.6    | 1520.89      | 196.0   | 91.1    | 1549.82      | 480.0   | 248.9   | 1160.00      |
| 98.0   | 36.7    | 1523.00      | 198.0   | 92.2    | 1549.12      | 490.0   | 254.4   | 1140.00      |